



GT-22-246

Glenair High-Speed Micro-D (GHSM) High Speed Characterization Report for Differential Applications



Revision History

Rev	Date	Approved	Description
1	8/28/2023	L. Blackwell	Preliminary Release
2	2/1/2024	L. Blackwell	Addition of Sav-Con and Feedthrough
3	11/8/2024	L. Blackwell	Addition of Wired Connector

Table of Contents

1.	<i>Introduction</i>	7
2.	<i>Product Overview</i>	7
3.	<i>Test Setup</i>	7
3.1.	<i>Test Fixtures</i>	8
3.1.1.	<i>Test PCBs</i>	8
3.2.	<i>Wired Connector</i>	9
3.3.	<i>Test Cable Assembly</i>	9
3.4.	<i>Bulkhead Feed-Thru and Sav-Con Connector Saver</i>	10
3.5.	<i>Test Pairs</i>	10
4.	<i>Board to Board Testing</i>	11
4.1.	<i>Straight GHSM (BSS) Performance</i>	11
4.1.1.	<i>Insertion Loss / Return Loss</i>	11
4.1.2.	<i>Straight GHSM (BSS) Crosstalk</i>	12
4.1.3.	<i>Straight GHSM (BSS) TDR</i>	14
4.2.	<i>Right-Angle GHSM (HBR) Performance Summary</i>	15
4.2.1.	<i>Insertion Loss/Return Loss</i>	15
4.2.2.	<i>Right-Angle (HBR) GHSM Crosstalk</i>	17
4.2.3.	<i>Right-Angle GHSM (HBR) TDR</i>	18
4.3.	<i>Straight to Right-Angle GHSM Performance Summary</i>	21
4.3.1.	<i>Insertion Loss/Return Loss</i>	21
4.3.2.	<i>Straight to Right-Angle GHSM Crosstalk</i>	22
4.3.3.	<i>Straight to Right-Angle GHSM TDR</i>	24
5.	<i>Wired Connector GHSM Performance Summary</i>	26
5.1.1.	<i>Insertion Loss/Return Loss</i>	26
5.1.2.	<i>Wired Connector GHSM Crosstalk</i>	27
5.1.3.	<i>Wired Connector GHSM TDR</i>	29
6.	<i>Cable Assembly</i>	30
6.1.	<i>Straight to Straight GHSM (BSS) Performance</i>	30
6.1.1.	<i>Insertion Loss / Return Loss</i>	30

6.1.2. Straight to Straight GHSM (BSS) Crosstalk.....	31
6.1.3. Straight to Straight GHSM (BSS) TDR.....	33
6.2. Right-Angle to Right-Angle GHSM (HBR) Performance Summary.....	34
6.2.1. Insertion Loss/Return Loss	34
6.2.2. Right-Angle to Right-Angle (HBR) GHSM Crosstalk	36
6.2.3. Right-Angle to Right-Angle GHSM (HBR) TDR.....	38
6.3. Straight to Right-Angle GHSM Performance Summary.....	39
6.3.1. Insertion Loss/Return Loss	40
6.3.2. Straight to Right-Angle GHSM Crosstalk	40
6.3.3. Straight to Right-Angle GHSM TDR.....	43
7. Feed-Thru and Sav-Con Results	44
7.1. Feed-Thru Performance	44
7.1.1. Insertion Loss / Return Loss.....	44
7.1.2. Crosstalk	45
7.1.3. TDR.....	47
7.2. Sav-Con Results	48
7.2.1. Insertion Loss / Return Loss.....	48
7.2.2. Crosstalk	49
7.2.3. TDR.....	51

Table of Figures

Figure 1. Straight GHSM (BSS) Test PCB Set	8
Figure 2. Right-Angle GHSM (HBR) Test PCB Set	8
Figure 3. Wired Connector Test Sample	9
Figure 4. Cable Assembly Test Sample	9
Figure 5. GHSM Bulkhead Feed-Thru Test Sample	10
Figure 6. GHSM Sav-Con Connector Saver Test Sample	10
Figure 7. GHSM Test Pairs	10
Figure 8. Straight GHSM (BSS) Response.....	11
Figure 9. Straight GHSM (BSS) NEXT	12
Figure 10. Straight GHSM (BSS) FEXT.....	13
Figure 11. TDR – Straight GHSM (BSS)	14
Figure 12. Right-Angle GHSM (HBR) PTH Response	15
Figure 13. Right-Angle GHSM (HBR) SMT Response.....	16
Figure 14. Right-Angle GHSM (HBR) NEXT	17
Figure 15. Right-Angle GHSM (HBR) FEXT	18
Figure 16. TDR – Right-Angle GHSM (HBR) PTH.....	19
Figure 17. TDR – Right-Angle GHSM (HBR) SMT	20
Figure 18. Straight to Right-Angle GHSM Response.....	21
Figure 19. Straight to Right-Angle GHSM NEXT	22
Figure 20. Straight to Right-Angle GHSM FEXT.....	23
Figure 21. TDR – Straight to Right-Angle GHSM PTH	24
Figure 22. TDR – Straight to Right-Angle GHSM SMT	25
Figure 23. Wired Connector GHSM Response.....	26
Figure 24. Wired Connector GHSM NEXT	27
Figure 25. Wired Connector GHSM FEXT.....	28
Figure 26. TDR – Wired Connector GHSM	29
Figure 27. Straight to Straight GHSM (BSS) Response.....	30
Figure 28. Straight to Straight GHSM (BSS) NEXT	31
Figure 29. Straight to Straight GHSM (BSS) FEXT	32
Figure 30. TDR – Straight to Straight GHSM (BSS)	33
Figure 31. Right-Angle to Right-Angle GHSM (HBR) PTH Response.....	34
Figure 32. Right-Angle to Right-Angle GHSM (HBR) SMT Response	35
Figure 33. Right-Angle to Right-Angle GHSM (HBR) NEXT	36
Figure 34. Right-Angle to Right-Angle GHSM (HBR) FEXT.....	37
Figure 35. TDR – Right-Angle to Right-Angle GHSM (HBR) PTH	38
Figure 36. TDR – Right-Angle to Right-Angle GHSM (HBR) SMT	39
Figure 37. Straight to Right-Angle GHSM Response.....	40
Figure 38. Straight to Right-Angle GHSM NEXT	41
Figure 39. Straight to Right-Angle GHSM FEXT.....	42



Figure 40. TDR – Straight to Right-Angle GHSM	43
Figure 41. GHSM Feed-Thru Response.....	44
Figure 42. GHSM Feed-Thru NEXT	45
Figure 43. GHSM Feed-Thru FEXT.....	46
Figure 44. TDR – GHSM Feed-Thru	47
Figure 45. GHSM Sav-Con Response	48
Figure 46. GHSM Sav-Con NEXT	49
Figure 47. GHSM Sav-Con FEXT	50
Figure 48. TDR – GHSM Sav-Con	51

1. Introduction

This document contains results from testing that was performed to evaluate the high-frequency electrical performance of the Glenair High-Speed Micro-D (GHSM). This report outlines frequency domain performance metrics such as insertion loss (IL) and return loss (RL) as well as the time-domain performance metric of impedance.

2. Product Overview

High-speed datalink applications such as aircraft avionics and other high datarate and bandwidth equipment require both optimized data transmission performance as well as robust mechanical and EMC performance. Micro-D connector packaging with high-retention-force TwistPin contacts has a proven track record in standard signal and power applications. The Glenair High-Speed Micro-D (GHSM) brings high-speed datalink performance to these mission-critical platforms. The GHSM is a 1 Amp pre-wired cable and PCB solution with up to 15 Gbps performance per differential pair. Auxiliary EMC ground springs on plug and integral contact separation architecture ensures data integrity and low attenuation performance.

3. Test Setup

This section details the test assemblies, test PCBs and equipment used to perform the high-speed characterization. All measurements were taken using a Tektronix DSA8300 Digital Serial Analyzer and a Keysight N5227B PNA network analyzer which were connected to coaxial-launch test fixture PCBs designed specifically for this testing.

3.1. Test Fixtures

3.1.1. Test PCBs

A test fixture PCB set utilizing edge-launch SMA connectors was designed for the high-speed tests. Each set consisted of two GHSM to SMA boards and a calibration board. One test set used straight GHSM (BSS) PCB-mount connectors, part numbers GHSM2R-15SBSSPU and GHSM2R-15PBSSLU. The other set used right-angle GHSM (HBR) PCB-mount connectors, part numbers GHSM2R-15PHBRLT-.110 and GHSM2R-15SHBRPT-.080. Photographs of the test boards are seen in the following two figures.

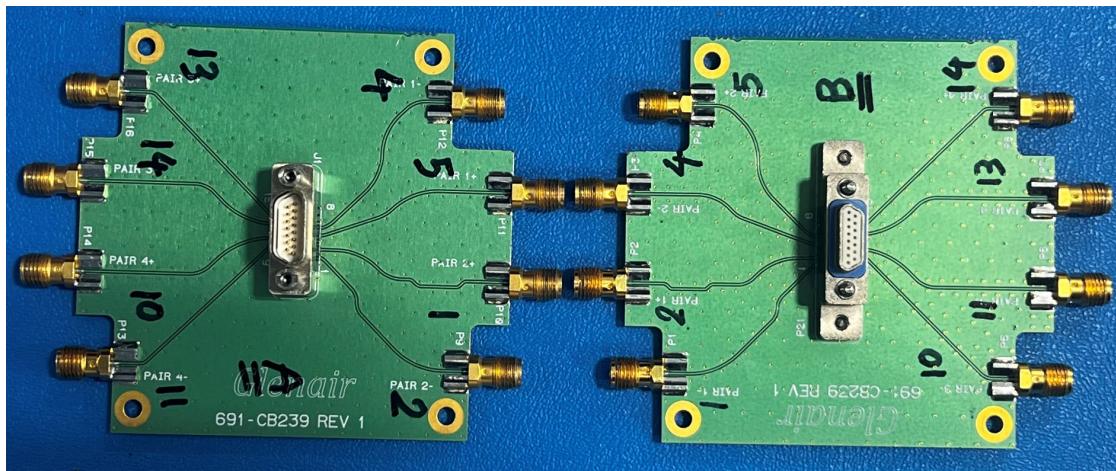


Figure 1. Straight GHSM (BSS) Test PCB Set



Figure 2. Right-Angle GHSM (HBR) Test PCB Set

The board sets were manufactured as a single panel and separated into individual test boards to give consistent signal characteristics.

3.2.Wired Connector

The Wired connector was interfaced to test equipment using Twinax-to-SMA PCBs. The test sample can be seen below.

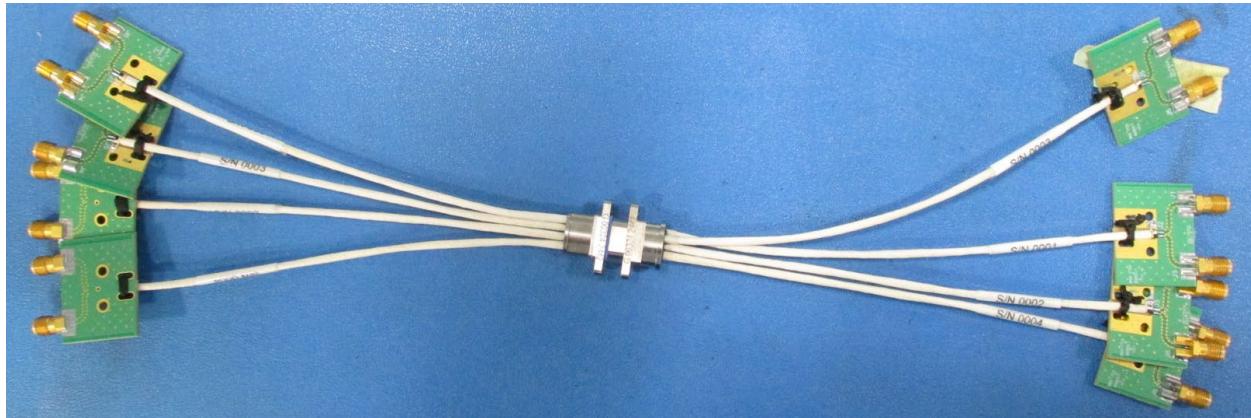


Figure 3. Wired Connector Test Sample

3.3.Test Cable Assembly

Cable assembly testing was performed using a six-inch GHS7M-1011-1-6 test sample. This sample can be seen in the figure below. Both Straight and Right-Angle Test PCB sets were used to obtain data for this report.



Figure 4. Cable Assembly Test Sample

3.4.Bulkhead Feed-Thru and Sav-Con Connector Saver

GHSM Bulkhead Feed-Thru testing was performed using the GHSM-1011-2R15SN seen in Figure 5. Test data was obtained with the Straight Test PCB.



Figure 5. GHSM Bulkhead Feed-Thru Test Sample

GHSM Sav-Con testing was performed using the GHSM2R-15USP1 seen in Figure 6. As with the Bulkhead Feed-Thru, data was obtained with the Straight Test PCB set.



Figure 6. GHSM Sav-Con Connector Saver Test Sample

3.5.Test Pairs

The darkened contacts shown in the figure below denotes differential test pairs. The crossed contacts denote the signal return contacts.

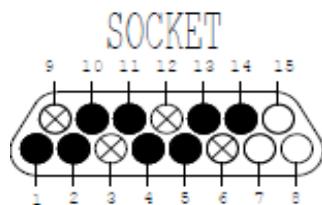


Figure 7. GHSM Test Pairs

Board-to-Board Results

4. Board to Board Testing

4.1.Straight GHSM (BSS) Performance

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the assembly only.

4.1.1. Insertion Loss / Return Loss

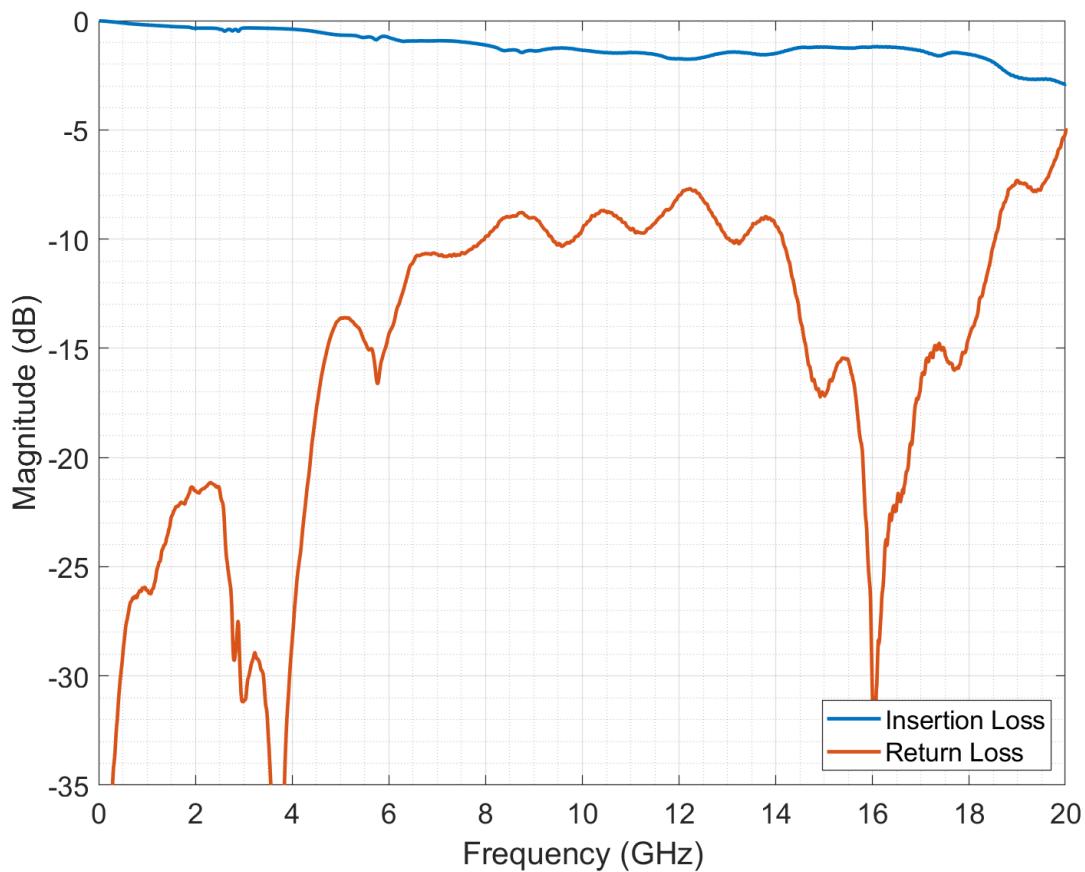


Figure 8. Straight GHSM (BSS) Response

Board-to-Board Results

4.1.2. Straight GHSM (BSS) Crosstalk

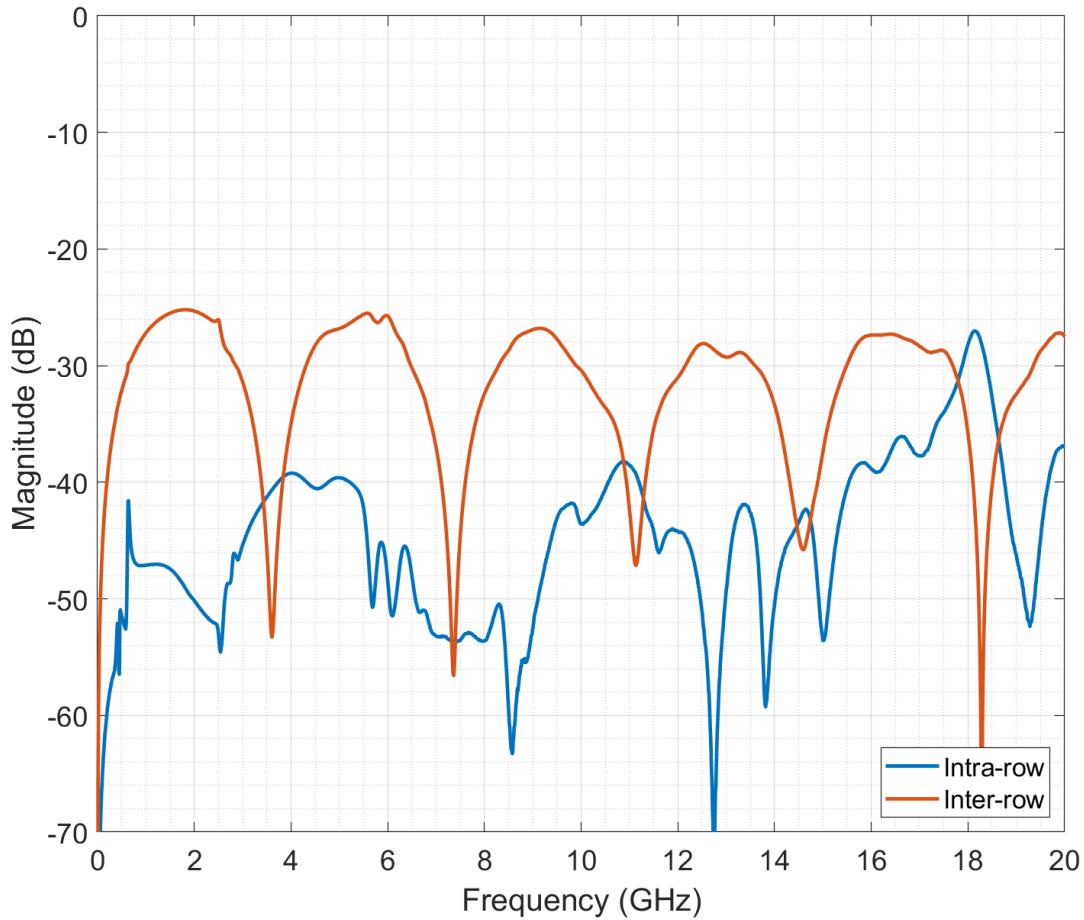


Figure 9. Straight GHSM (BSS) NEXT

Board-to-Board Results

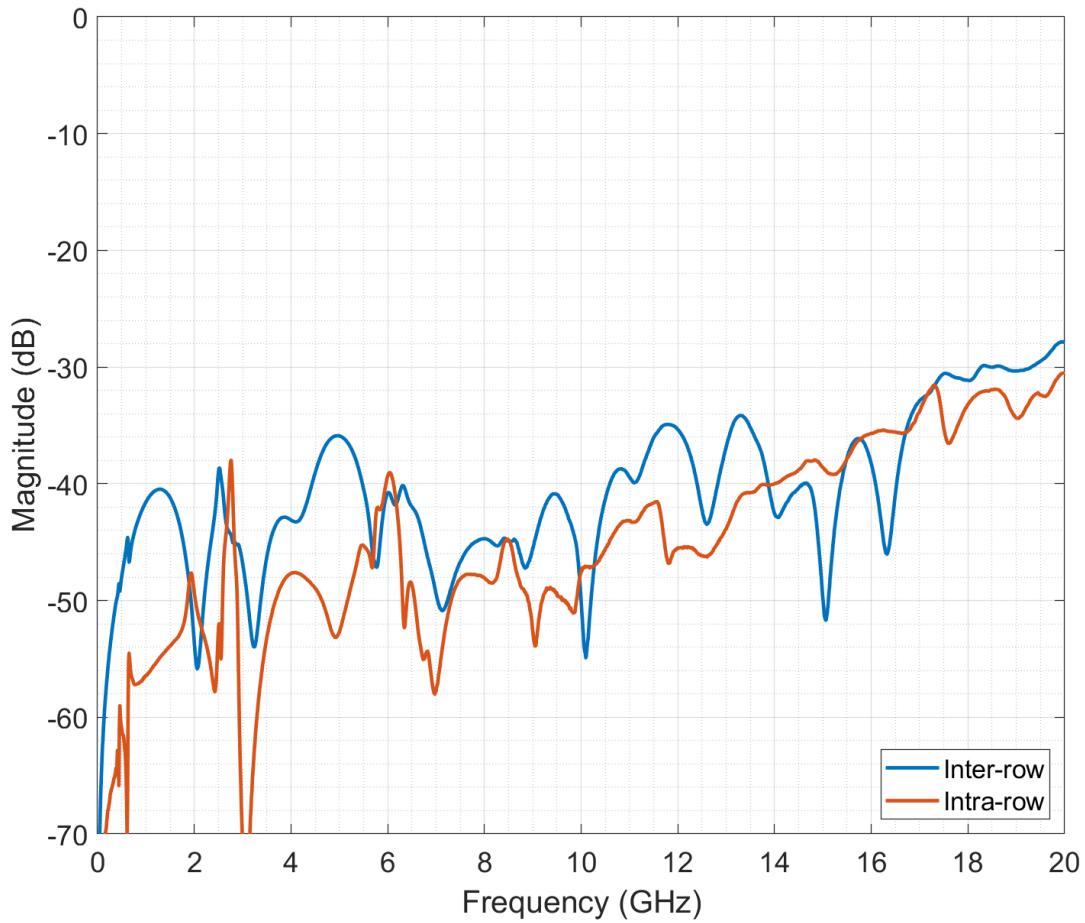


Figure 10. Straight GHSM (BSS) FEXT

Board-to-Board Results

4.1.3. Straight GHSM (BSS) TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise time is defined at 10% to 90% of the signal's rising edge. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

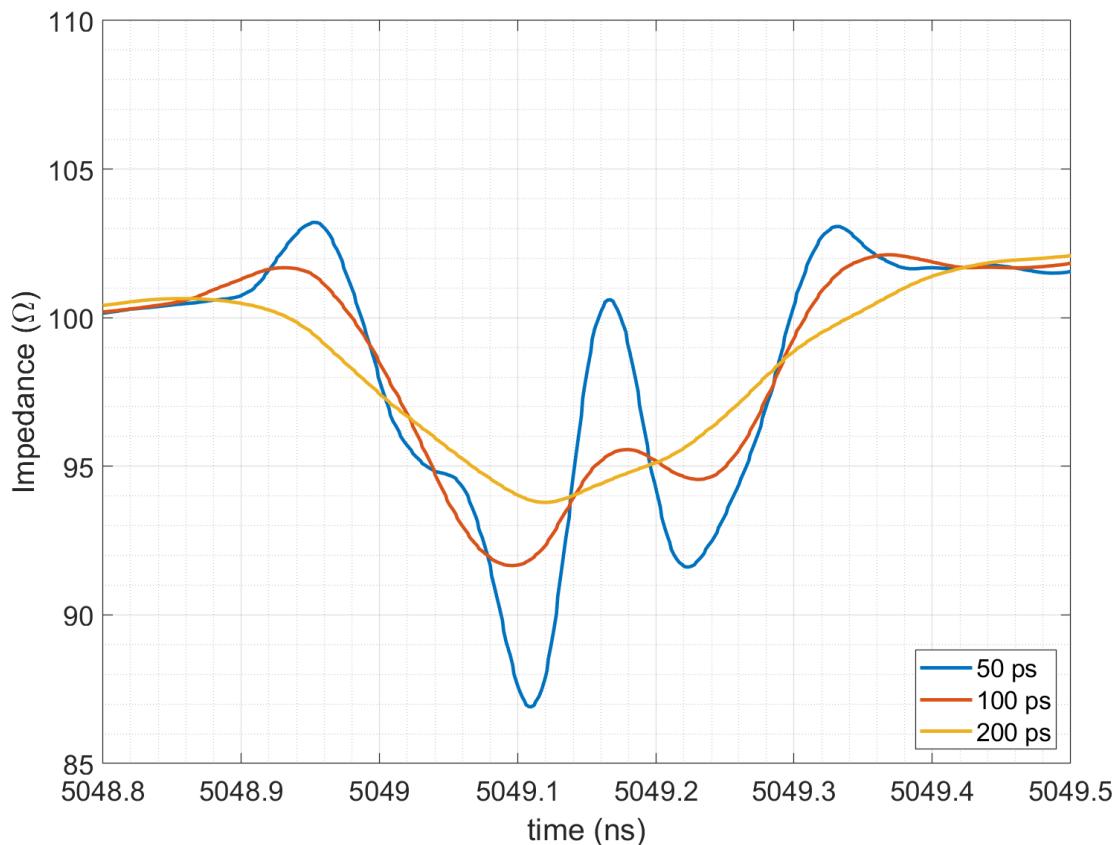


Figure 11. TDR – Straight GHSM (BSS)

Board-to-Board Results

4.2.Right-Angle GHSM (HBR) Performance Summary

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the connector only.

4.2.1. Insertion Loss/Return Loss

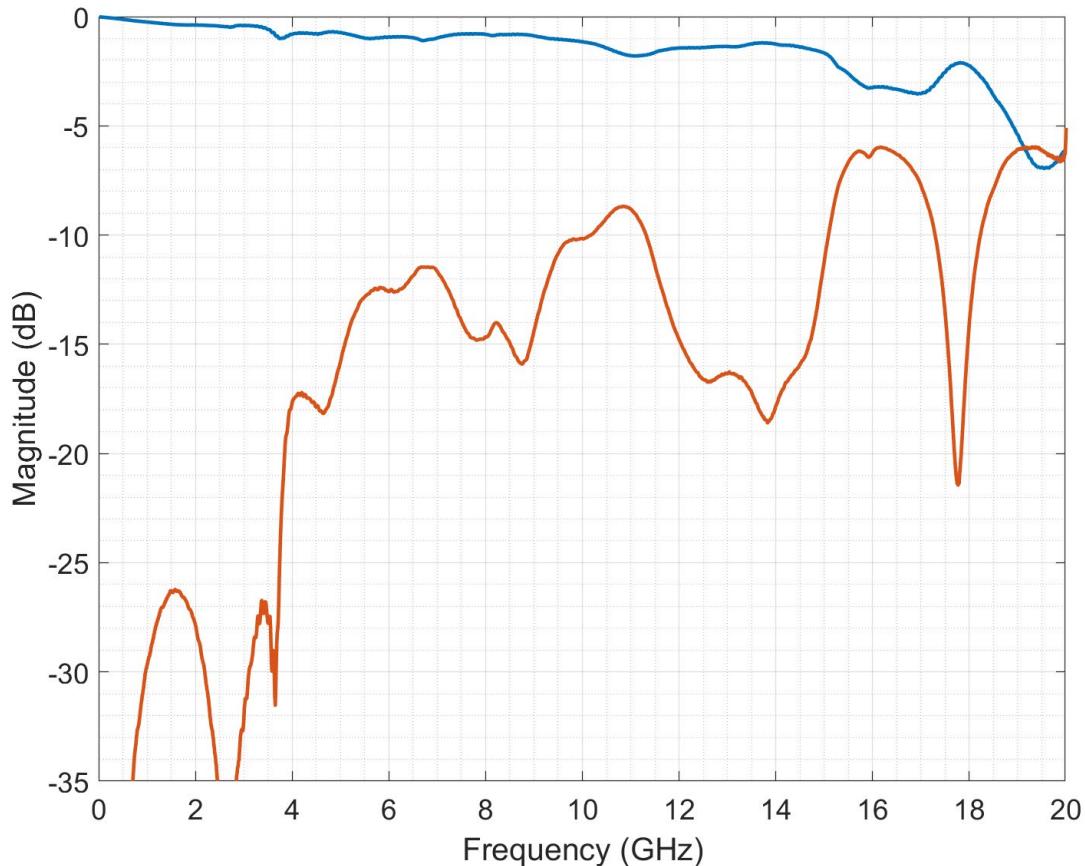


Figure 12. Right-Angle GHSM (HBR) PTH Response

Board-to-Board Results

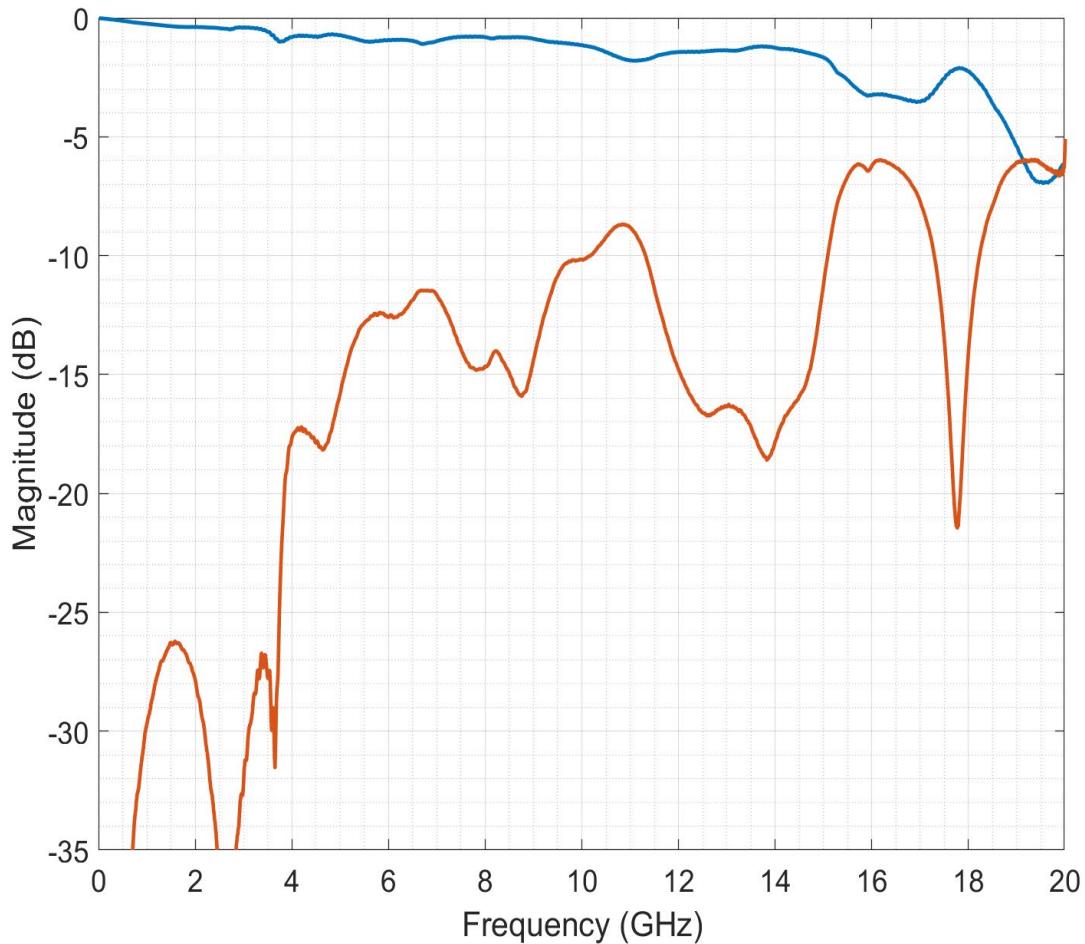


Figure 13. Right-Angle GHSM (HBR) SMT Response

Board-to-Board Results

4.2.2. Right-Angle (HBR) GHSM Crosstalk

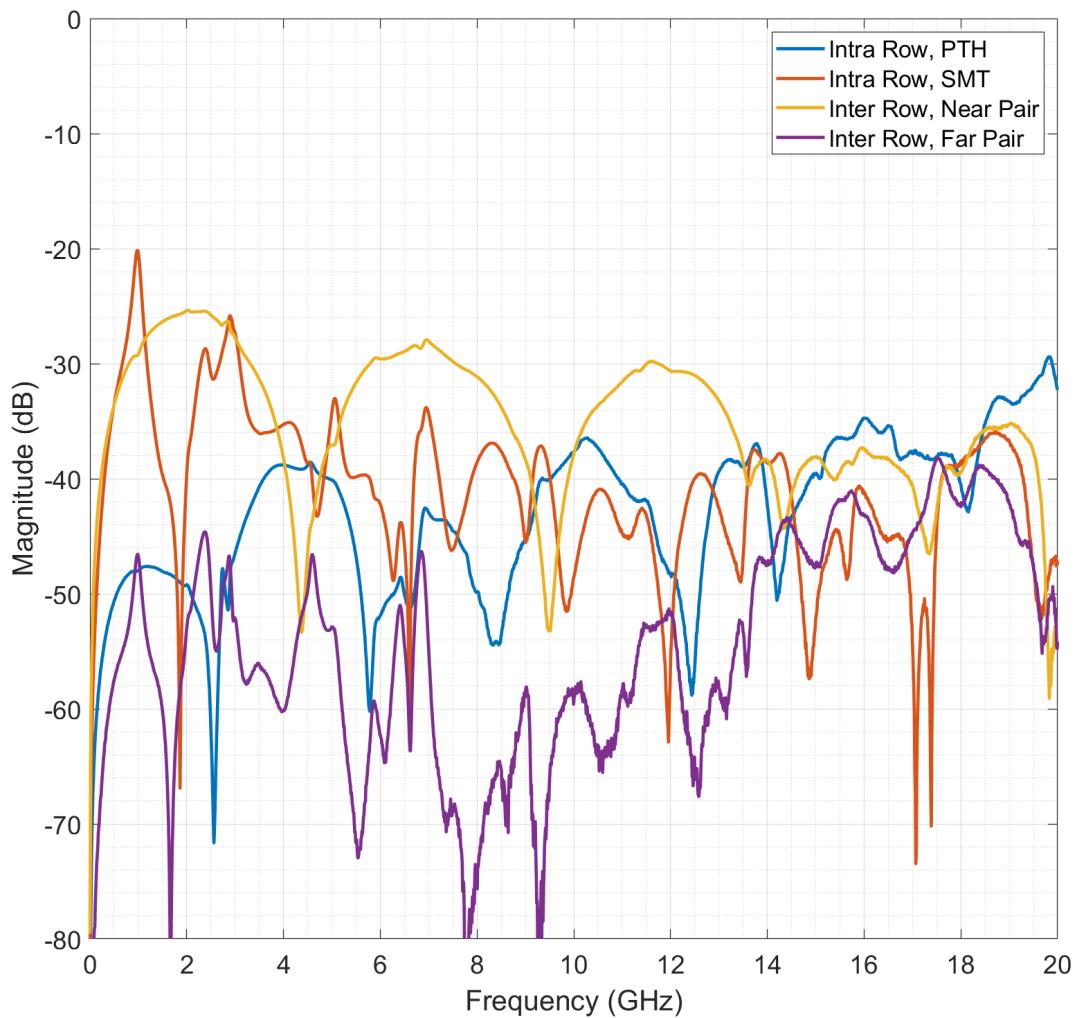


Figure 14. Right-Angle GHSM (HBR) NEXT

Board-to-Board Results

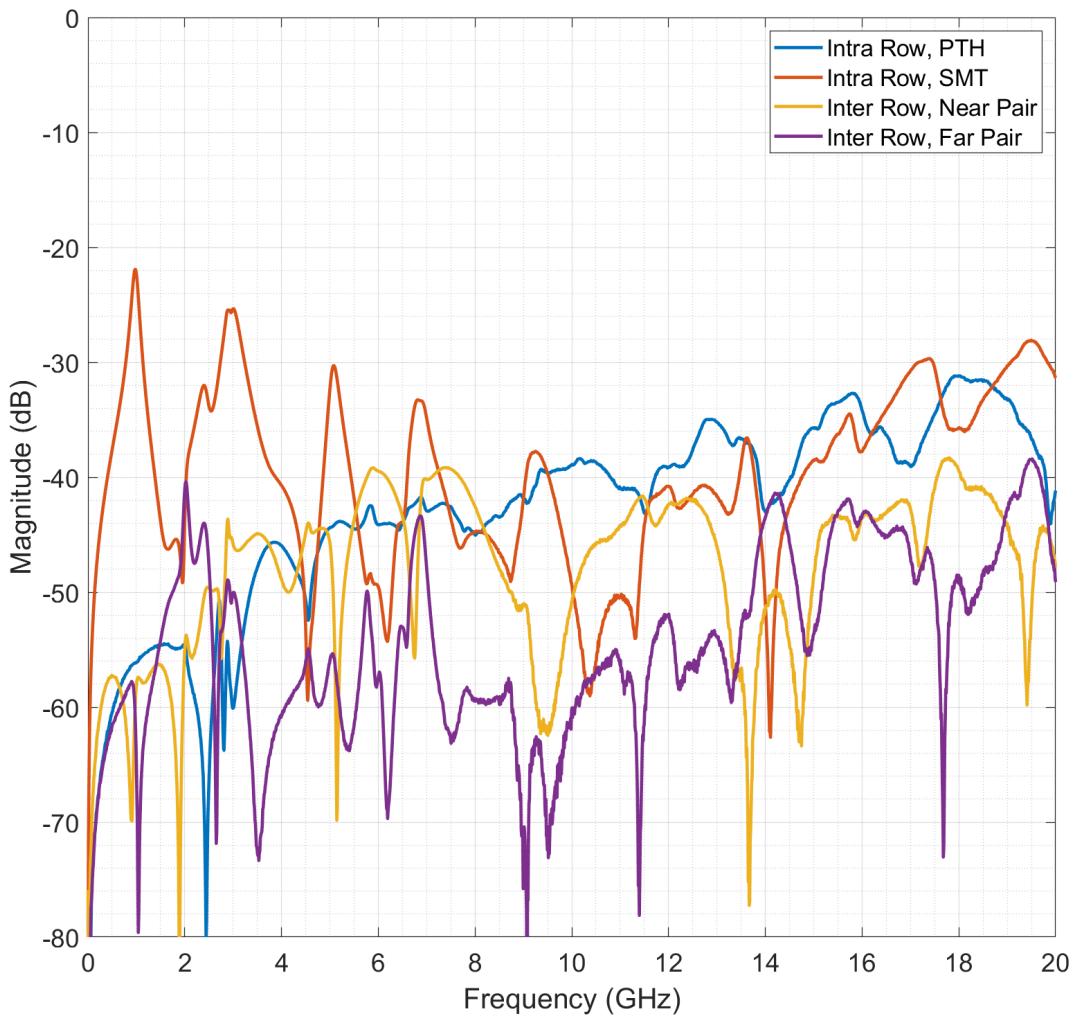


Figure 15. Right-Angle GHSM (HBR) FEXT

4.2.3. Right-Angle GHSM (HBR) TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise

Board-to-Board Results

time is defined at 20% to 80% of the signal's rising edge. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

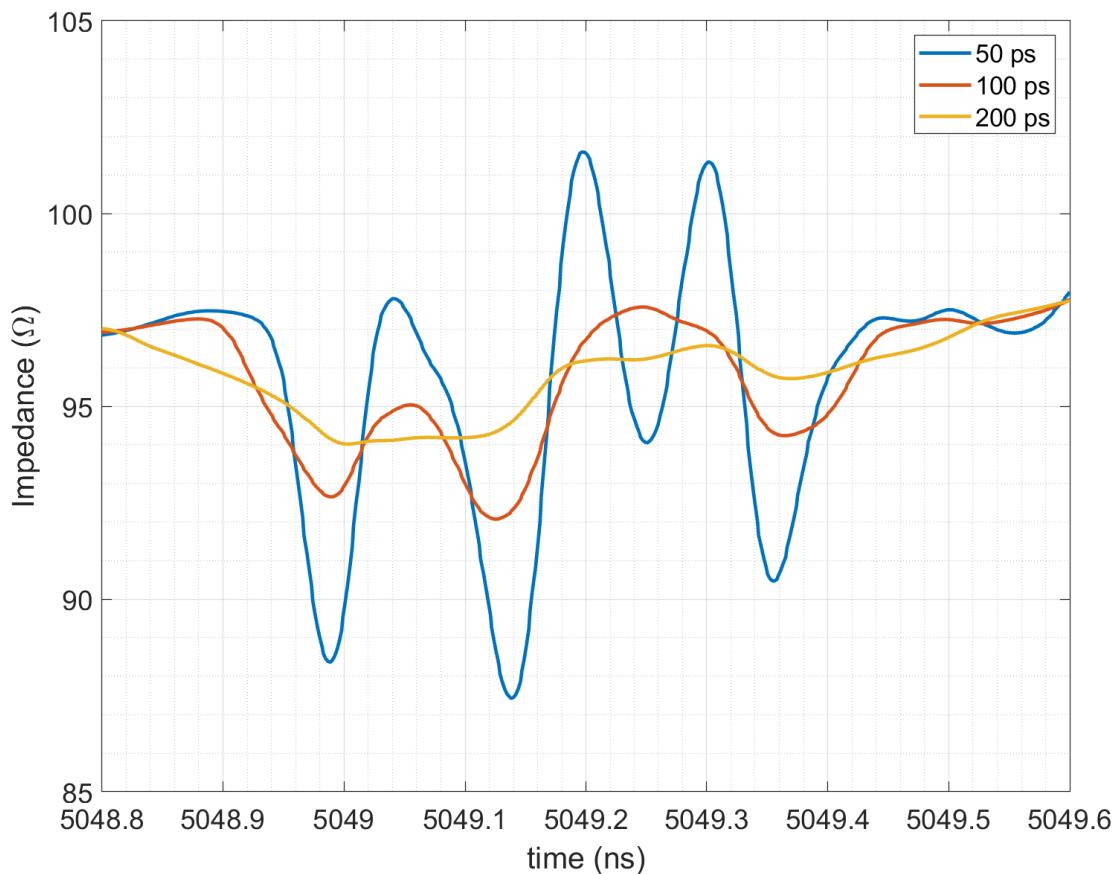


Figure 16. TDR – Right-Angle GHSM (HBR) PTH

Board-to-Board Results

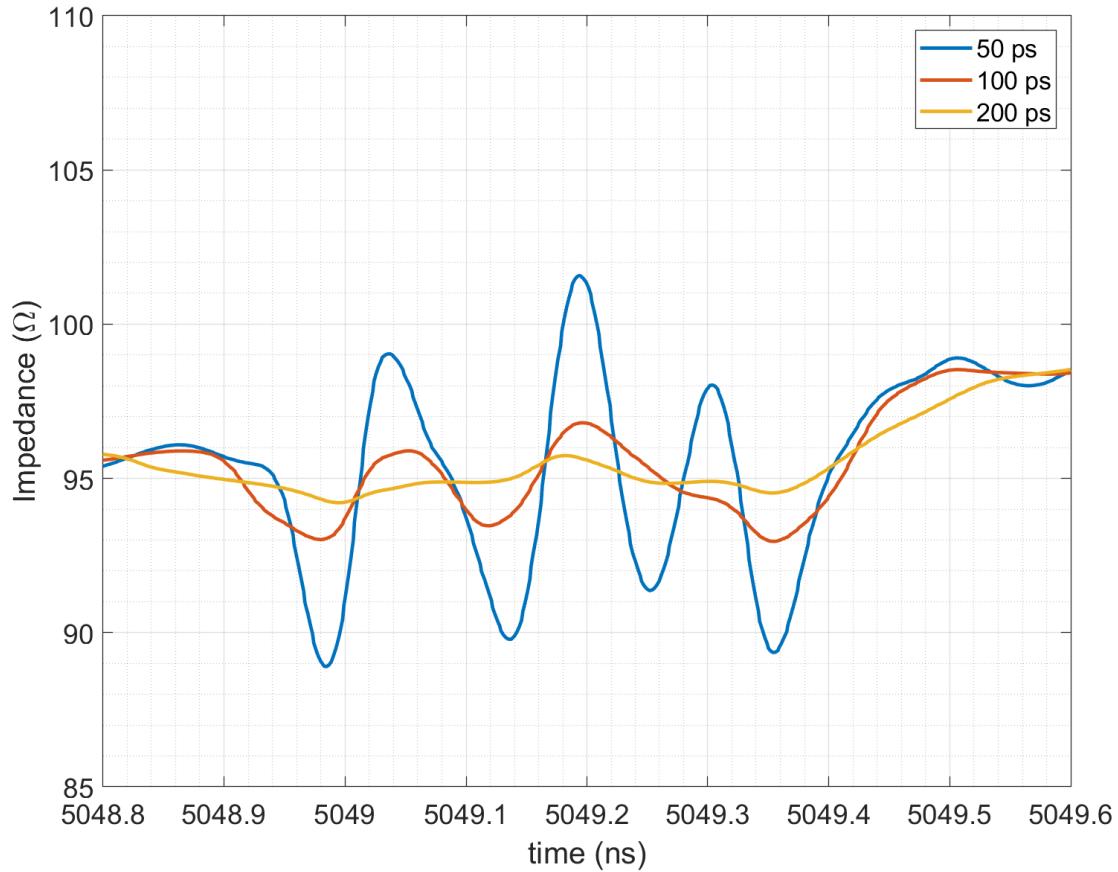


Figure 17. TDR – Right-Angle GHSM (HBR) SMT

Board-to-Board Results

4.3.Straight to Right-Angle GHSM Performance Summary

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the assembly only.

4.3.1. Insertion Loss/Return Loss

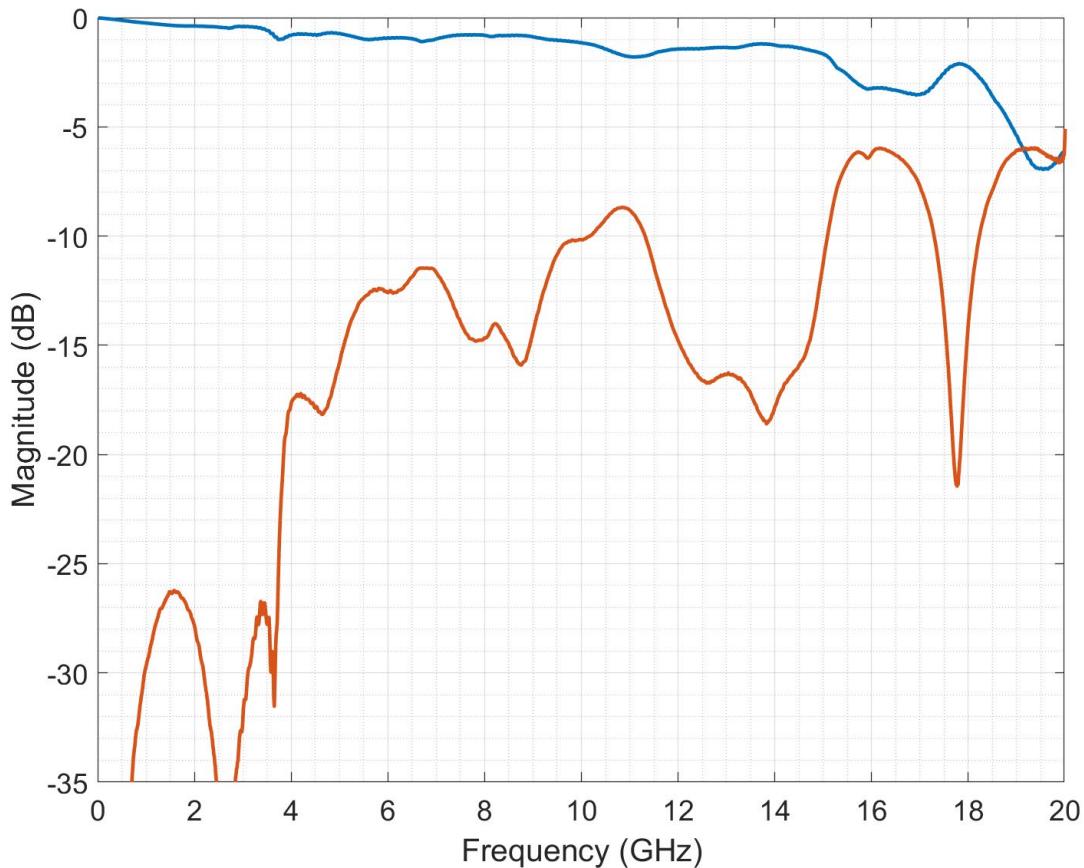


Figure 18. Straight to Right-Angle GHSM Response

Board-to-Board Results

4.3.2. Straight to Right-Angle GHSM Crosstalk

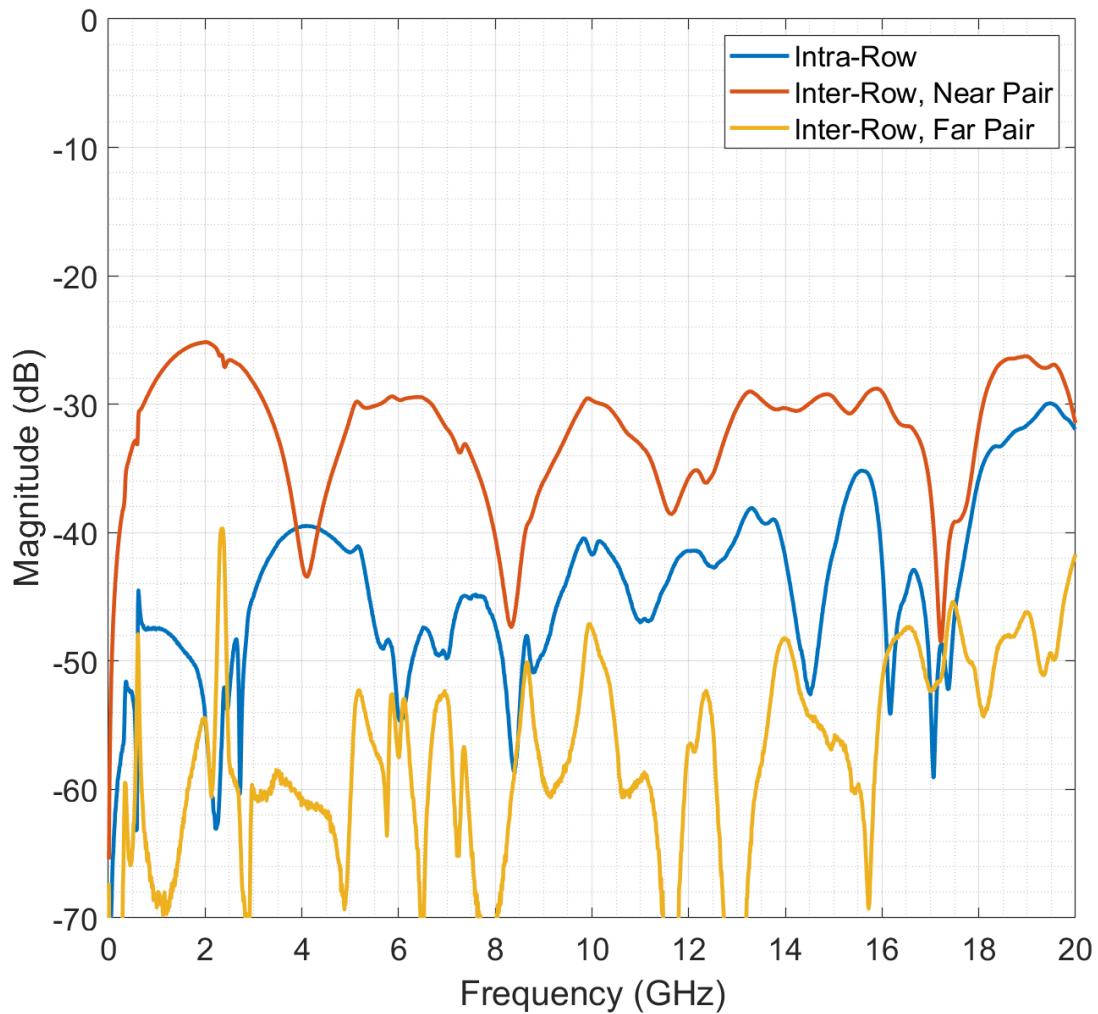


Figure 19. Straight to Right-Angle GHSM NEXT

Board-to-Board Results

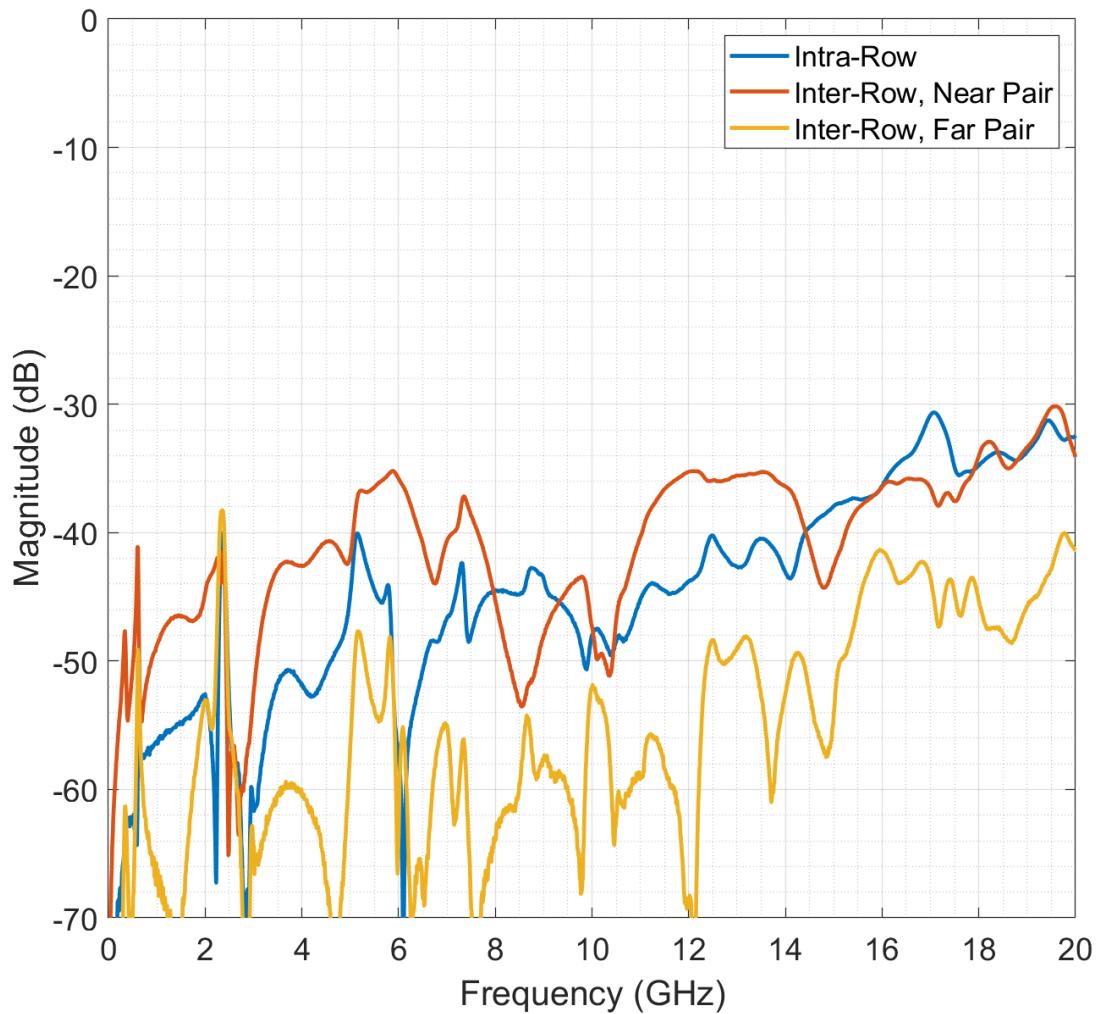


Figure 20. Straight to Right-Angle GHSM FEXT

Board-to-Board Results

4.3.3. Straight to Right-Angle GHSM TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise time is defined at 20% to 80% of the signal's rising edge. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship



Figure 21. TDR – Straight to Right-Angle GHSM PTH

Board-to-Board Results



Figure 22. TDR – Straight to Right-Angle GHSM SMT

Wired Connector Results

5. Wired Connector GHSM Performance Summary

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the assembly only.

5.1.1. Insertion Loss/Return Loss

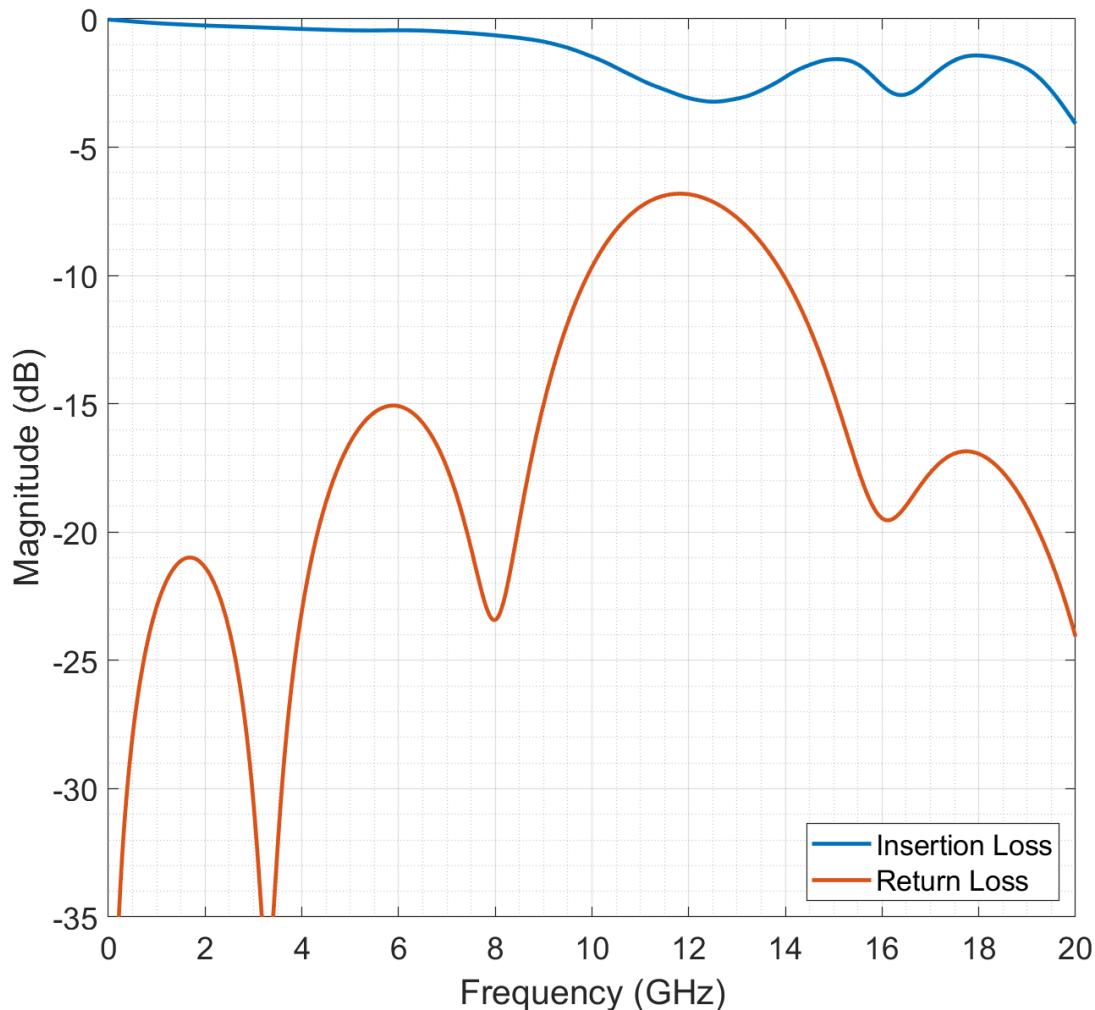


Figure 23. Wired Connector GHSM Response

Wired Connector Results

5.1.2. Wired Connector GHSM Crosstalk

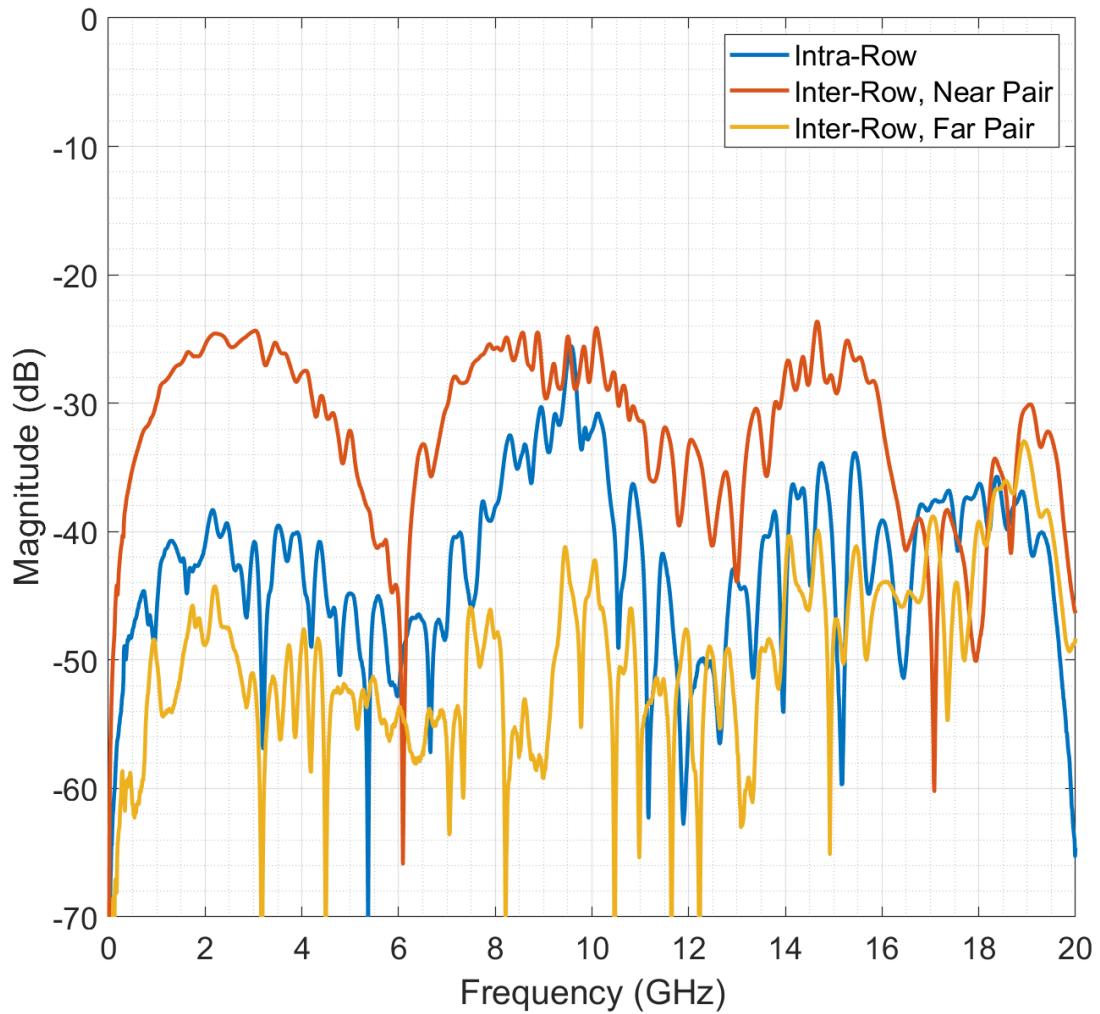


Figure 24. Wired Connector GHSM NEXT

Wired Connector Results

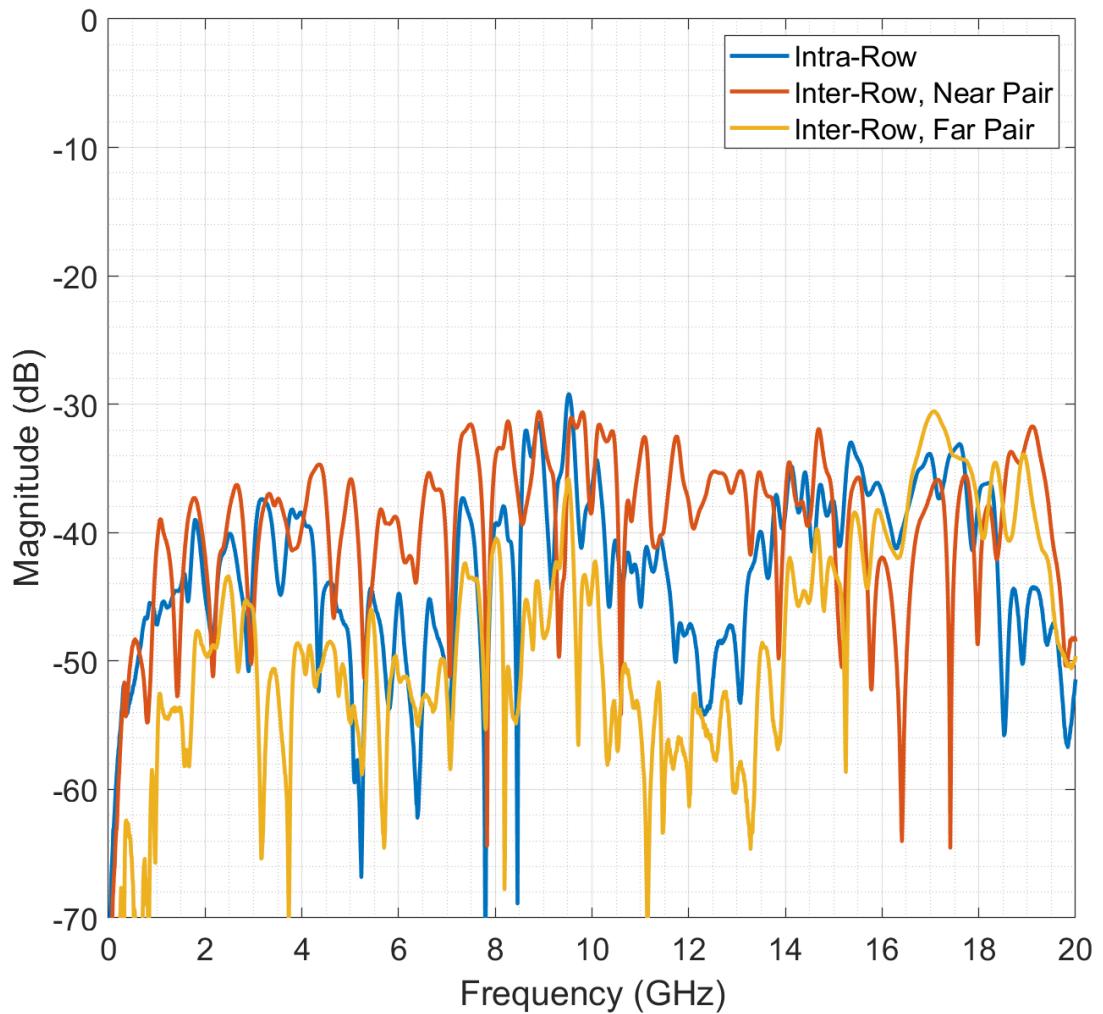


Figure 25. Wired Connector GHSM FEXT

Wired Connector Results

5.1.3. Wired Connector GHSM TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise time is defined at 20% to 80% of the signal's rising edge. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

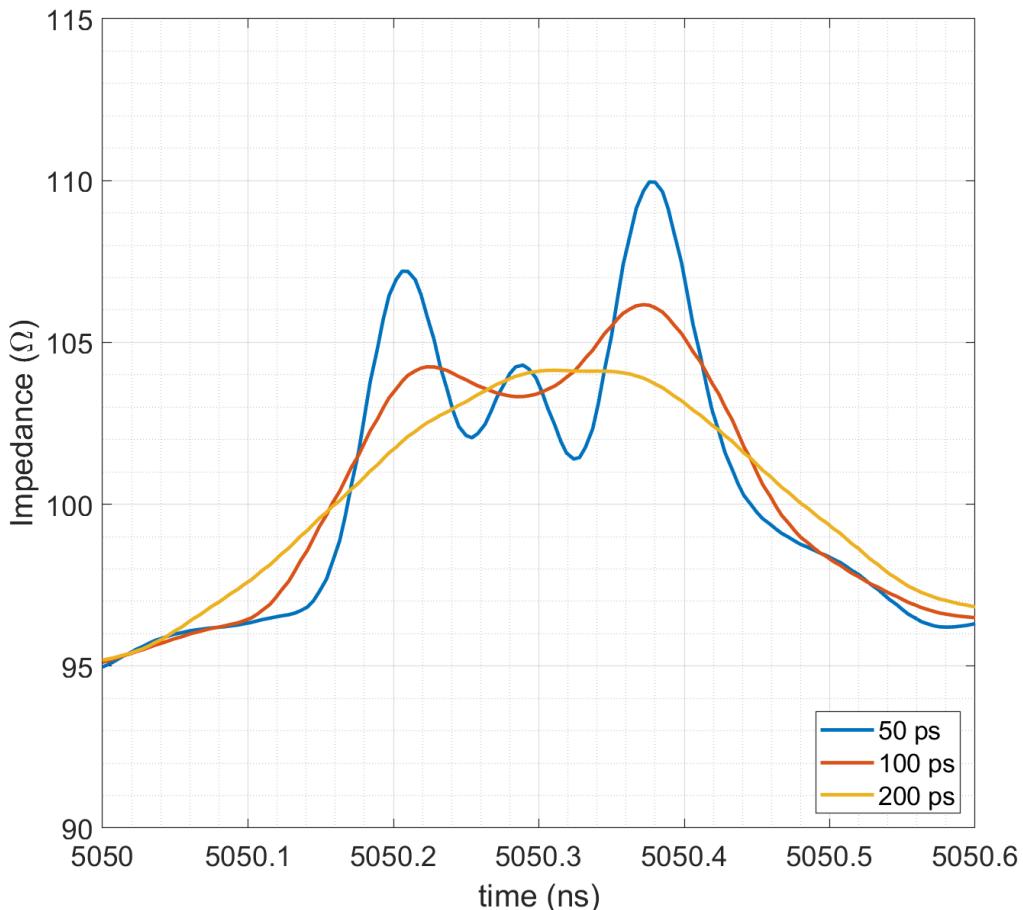


Figure 26. TDR – Wired Connector GHSM

Cable Assembly Results

6. Cable Assembly

6.1.Straight to Straight GHSM (BSS) Performance

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the assembly only.

6.1.1. Insertion Loss / Return Loss

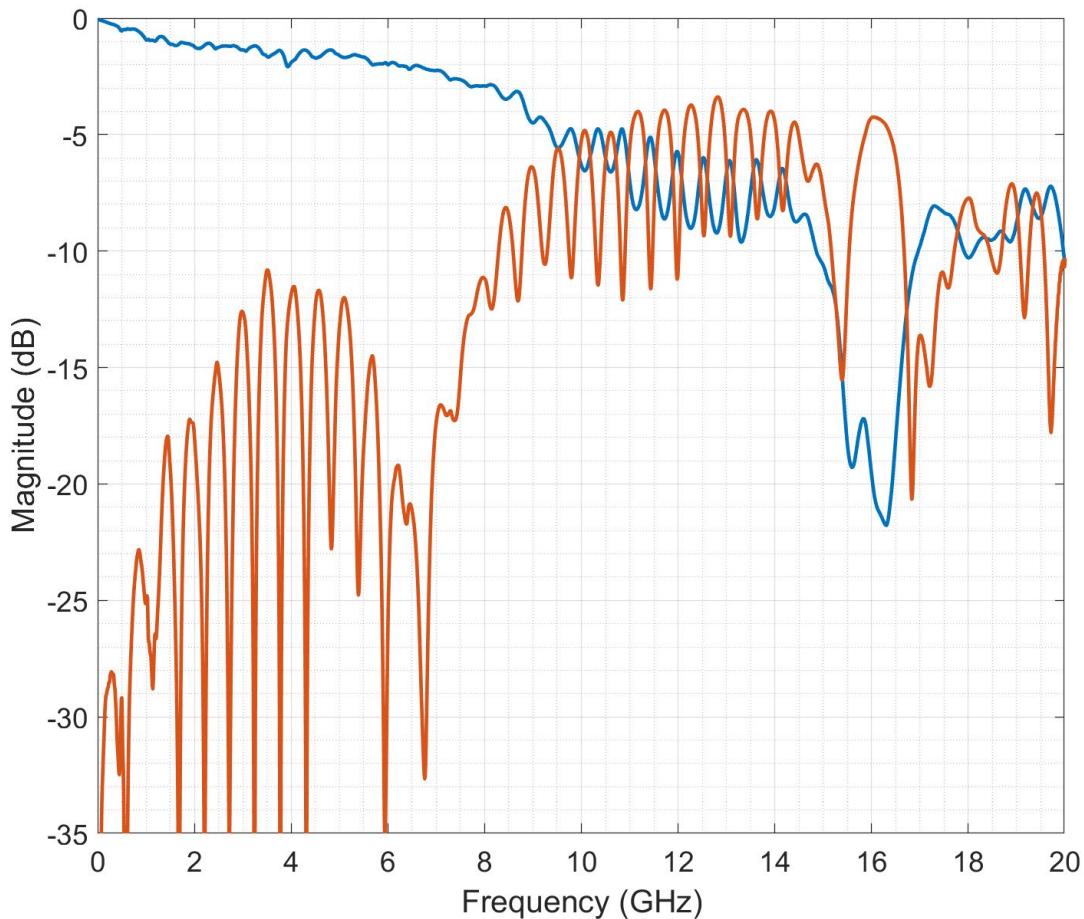


Figure 27. Straight to Straight GHSM (BSS) Response

Cable Assembly Results

6.1.2. Straight to Straight GHSM (BSS) Crosstalk

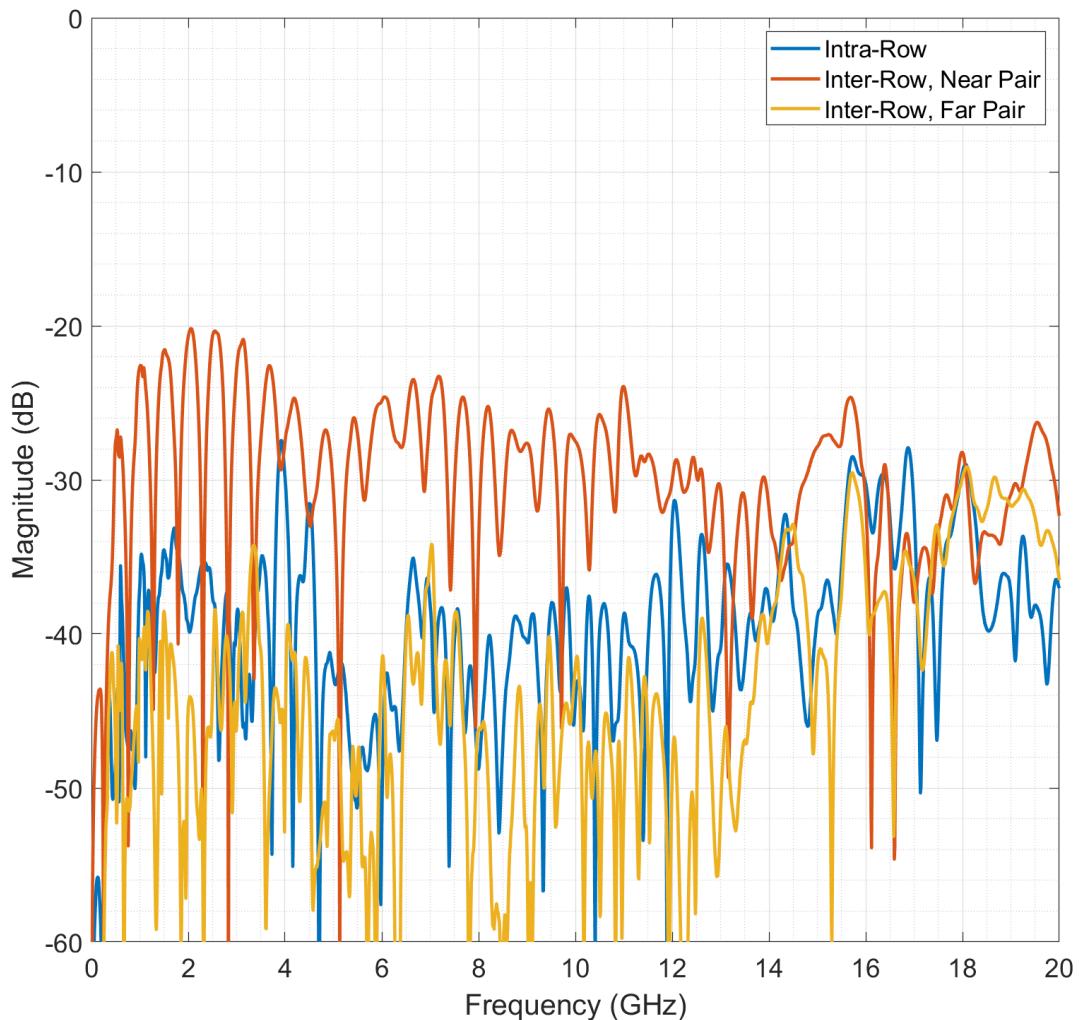


Figure 28. Straight to Straight GHSM (BSS) NEXT

Cable Assembly Results

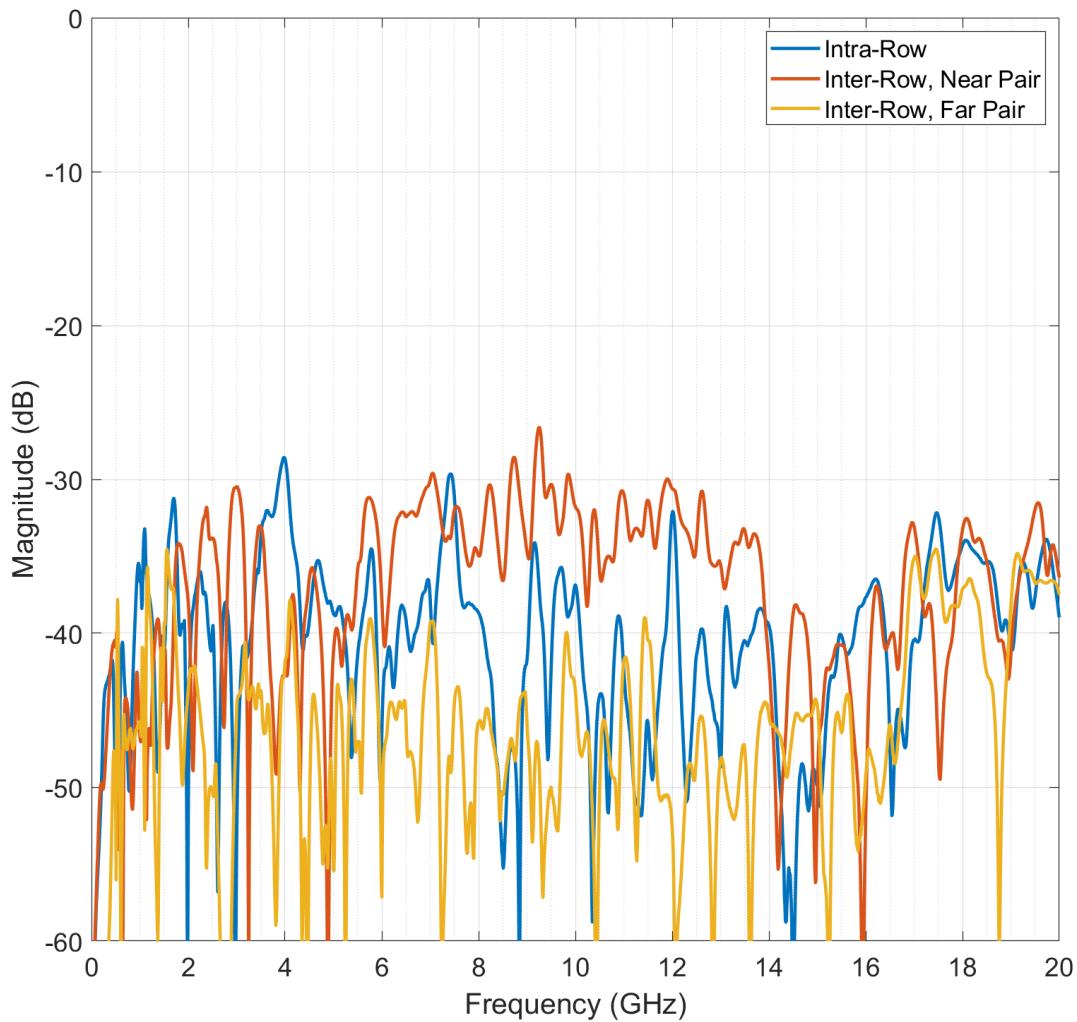


Figure 29. Straight to Straight GHSM (BSS) FEXT

Cable Assembly Results

6.1.3. Straight to Straight GHSM (BSS) TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

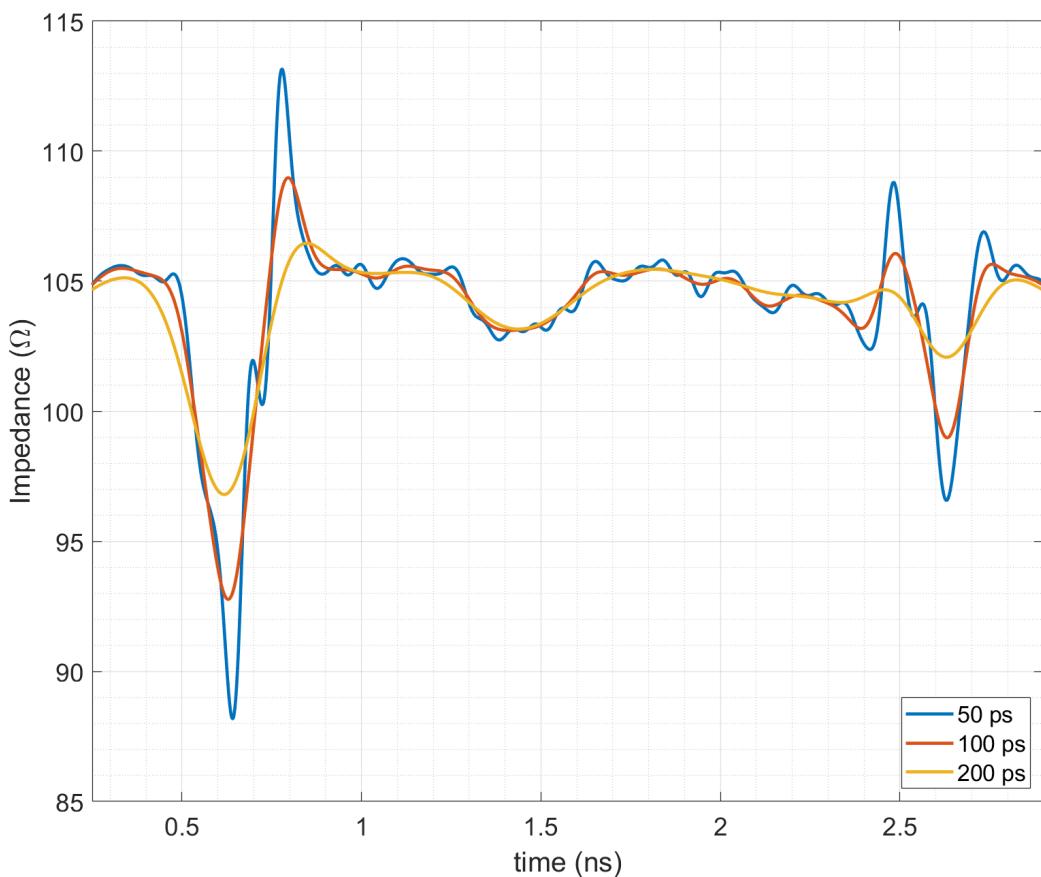


Figure 30. TDR – Straight to Straight GHSM (BSS)

Cable Assembly Results

6.2.Right-Angle to Right-Angle GHSM (HBR) Performance Summary

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the assembly only.

6.2.1. Insertion Loss/Return Loss

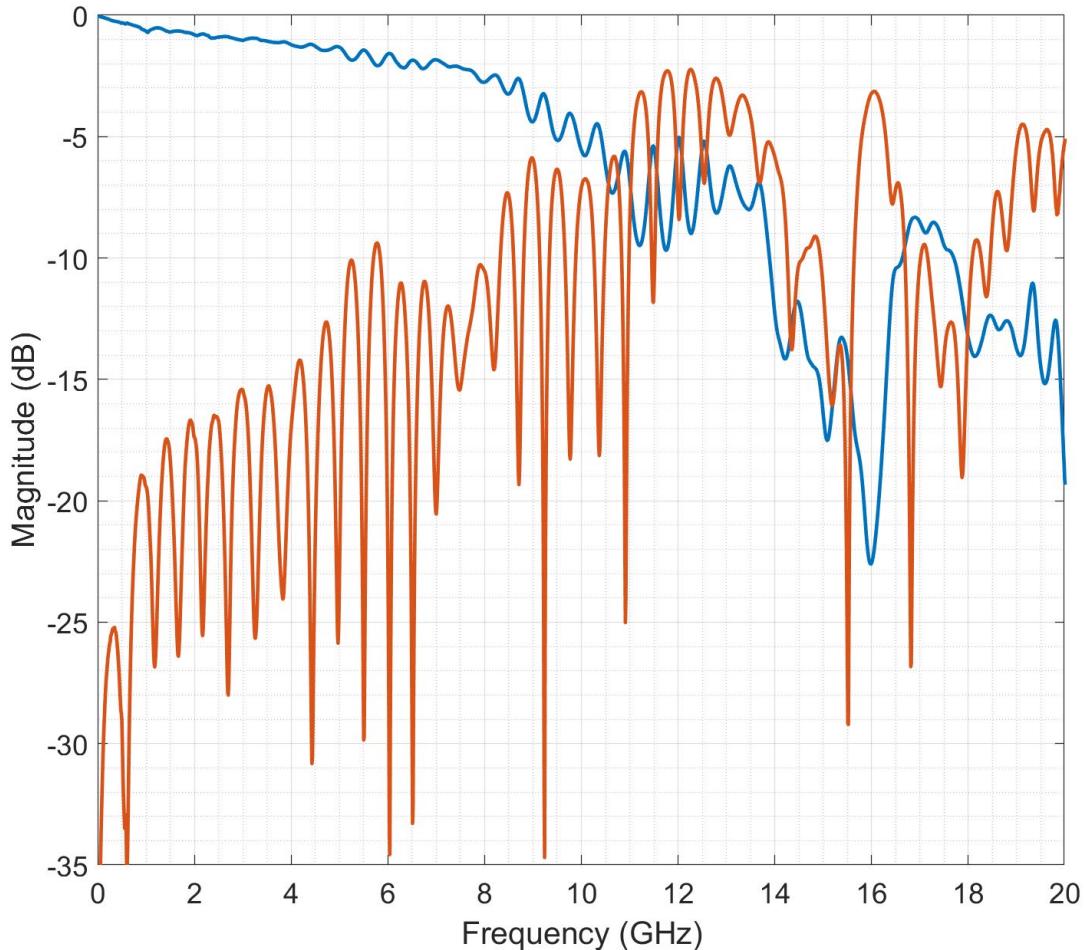


Figure 31. Right-Angle to Right-Angle GHSM (HBR) PTH Response

Cable Assembly Results

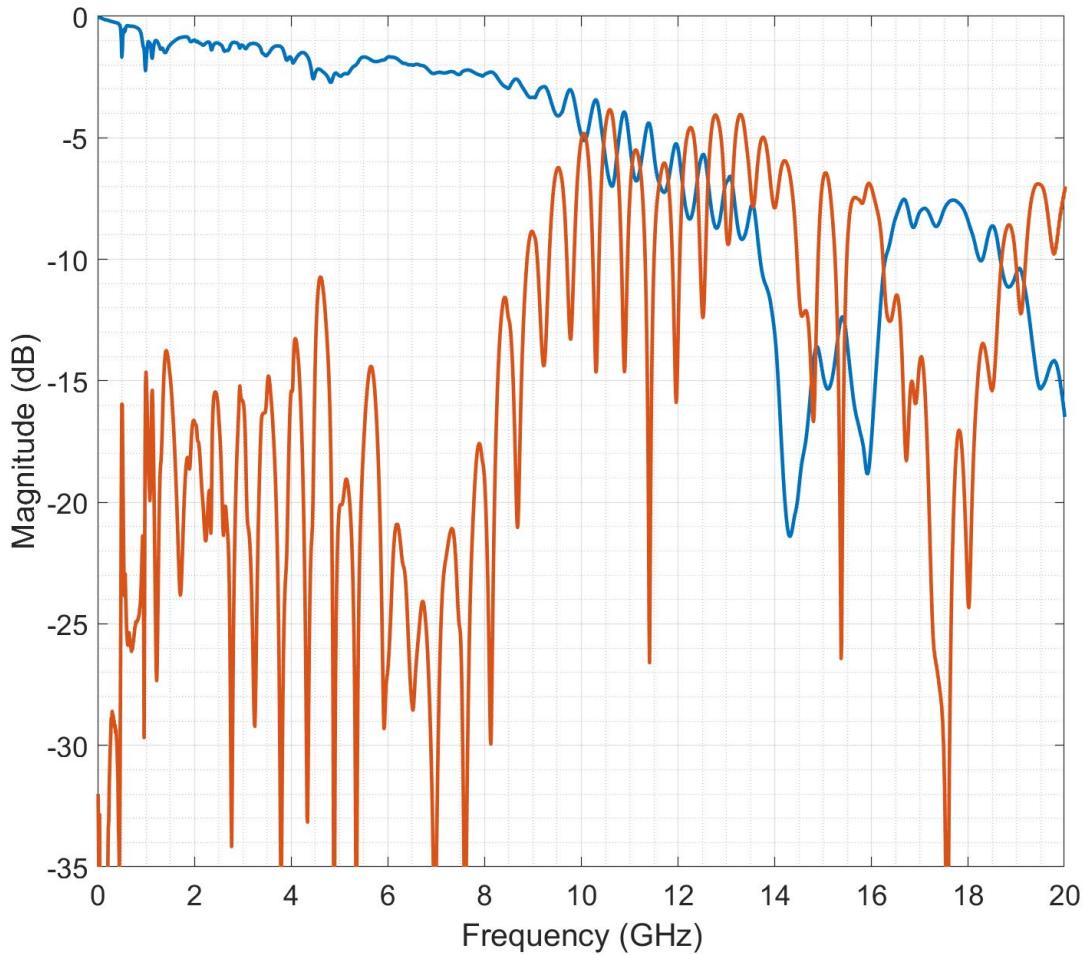


Figure 32. Right-Angle to Right-Angle GHSM (HBR) SMT Response

Cable Assembly Results

6.2.2. Right-Angle to Right-Angle (HBR) GHSM Crosstalk

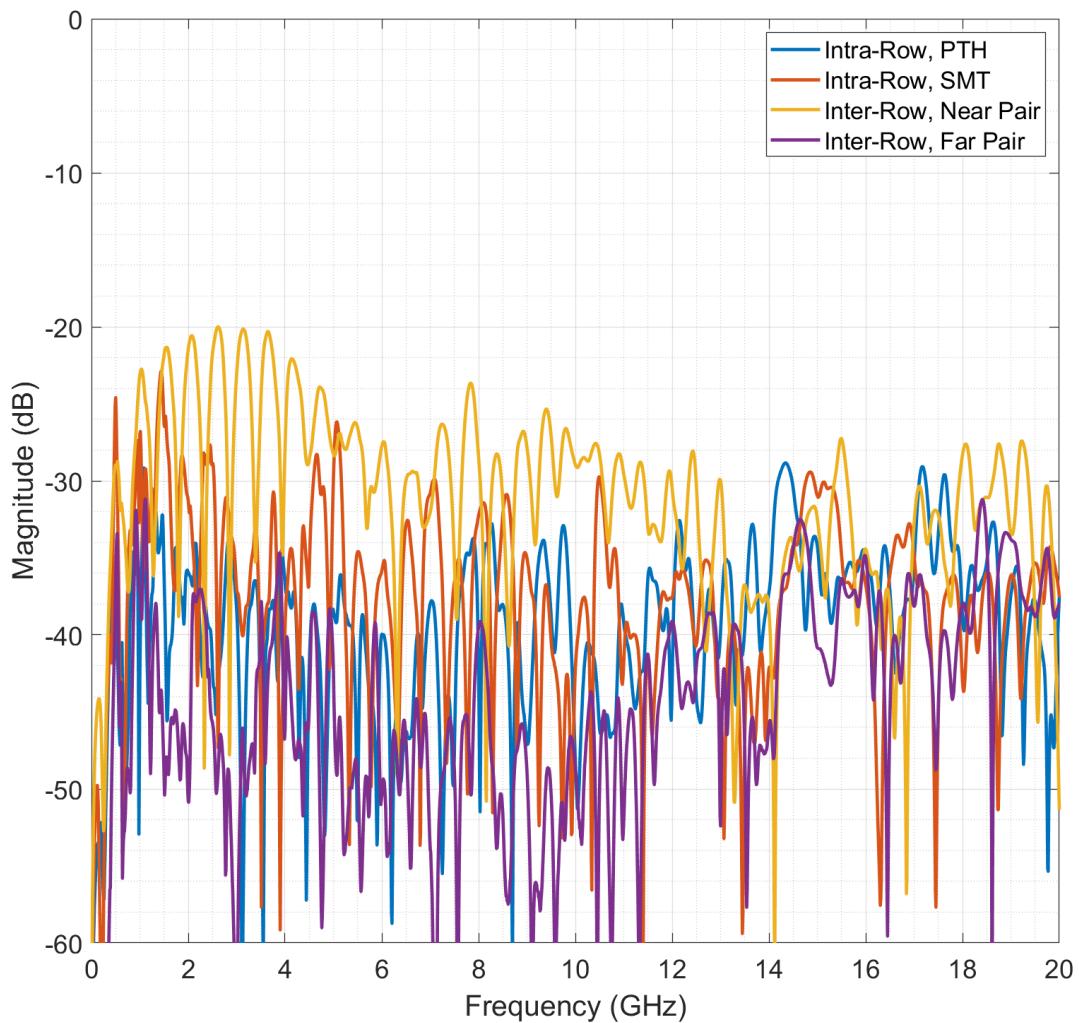


Figure 33. Right-Angle to Right-Angle GHSM (HBR) NEXT

Cable Assembly Results

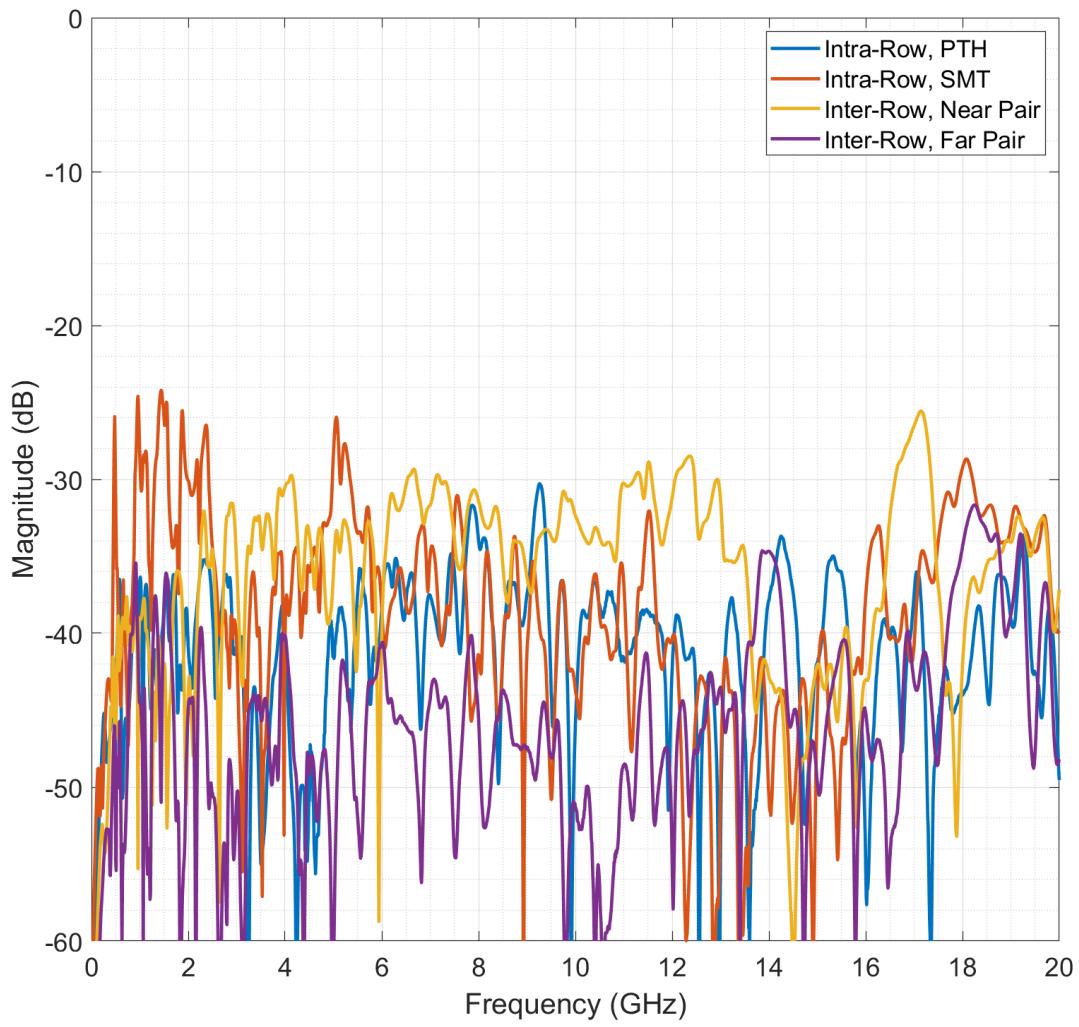


Figure 34. Right-Angle to Right-Angle GHSM (HBR) FEXT

Cable Assembly Results

6.2.3. Right-Angle to Right-Angle GHSM (HBR) TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

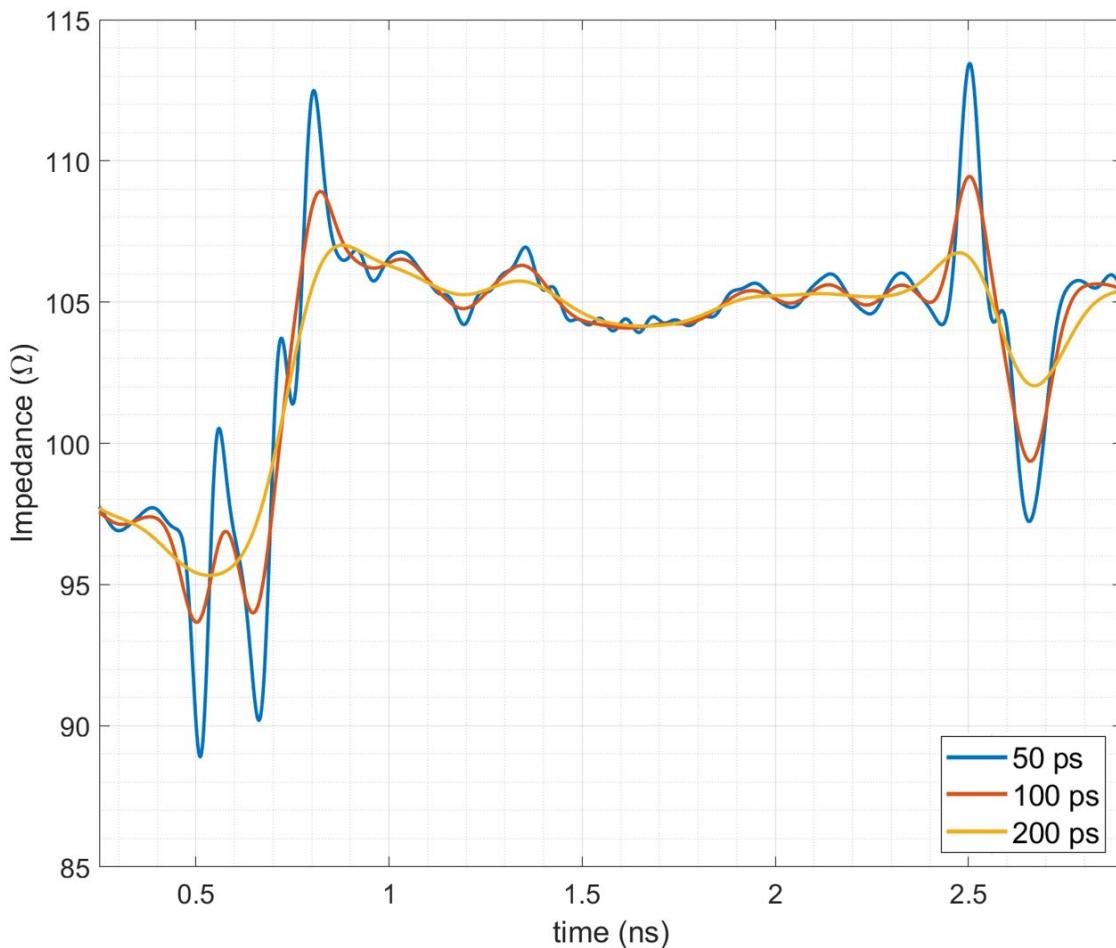


Figure 35. TDR – Right-Angle to Right-Angle GHSM (HBR) PTH

Cable Assembly Results

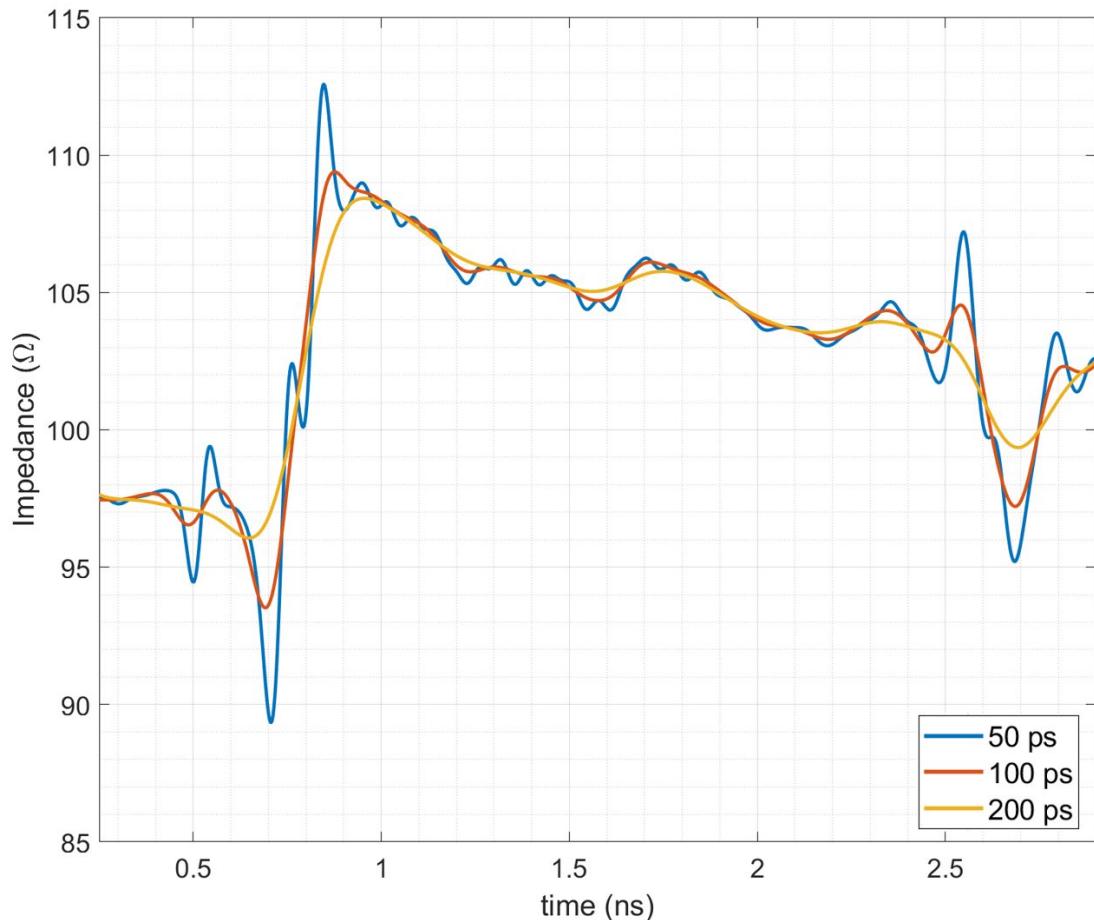


Figure 36. TDR – Right-Angle to Right-Angle GHSM (HBR) SMT

6.3.Straight to Right-Angle GHSM Performance Summary

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the assembly only.

Cable Assembly Results

6.3.1. Insertion Loss/Return Loss

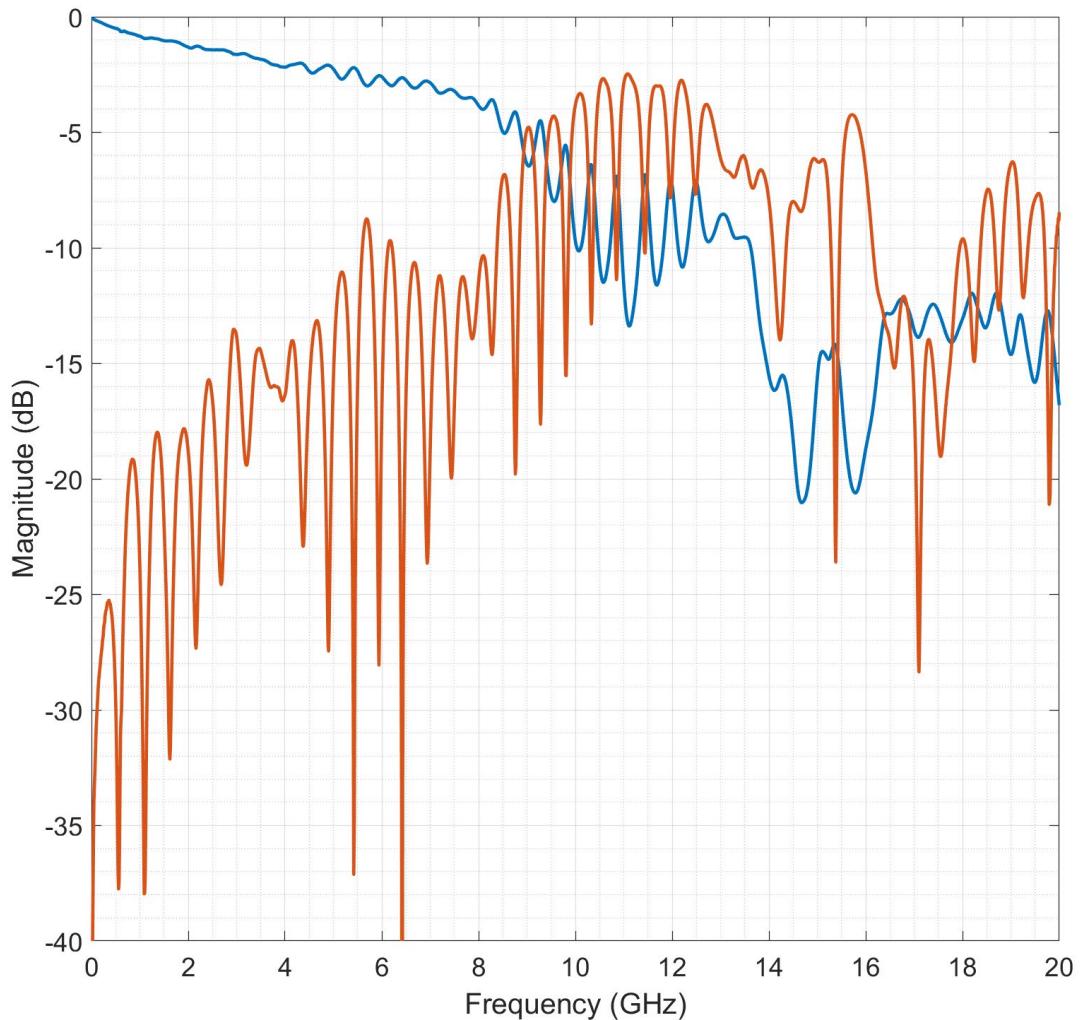


Figure 37. Straight to Right-Angle GHSM Response

6.3.2. Straight to Right-Angle GHSM Crosstalk

Cable Assembly Results

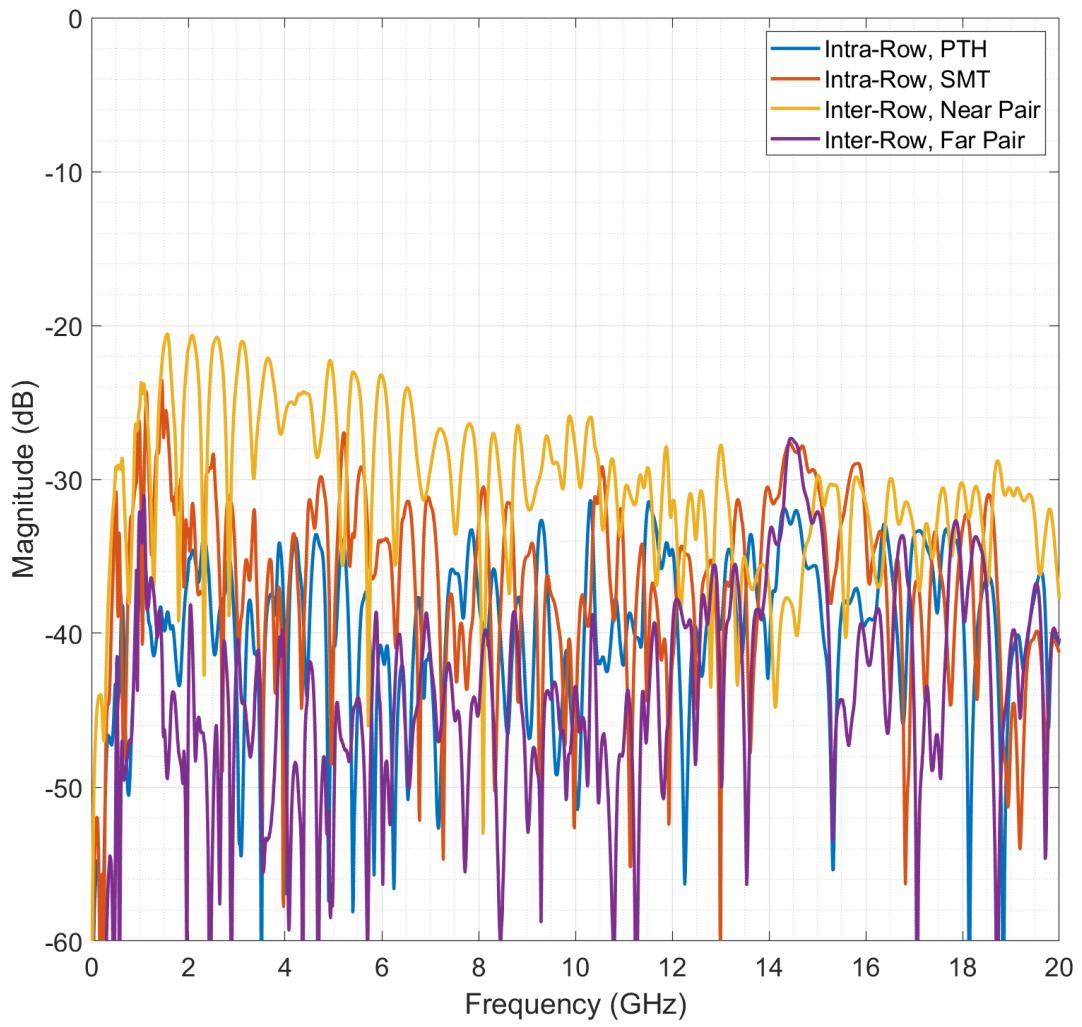


Figure 38. Straight to Right-Angle GHSM NEXT

Cable Assembly Results

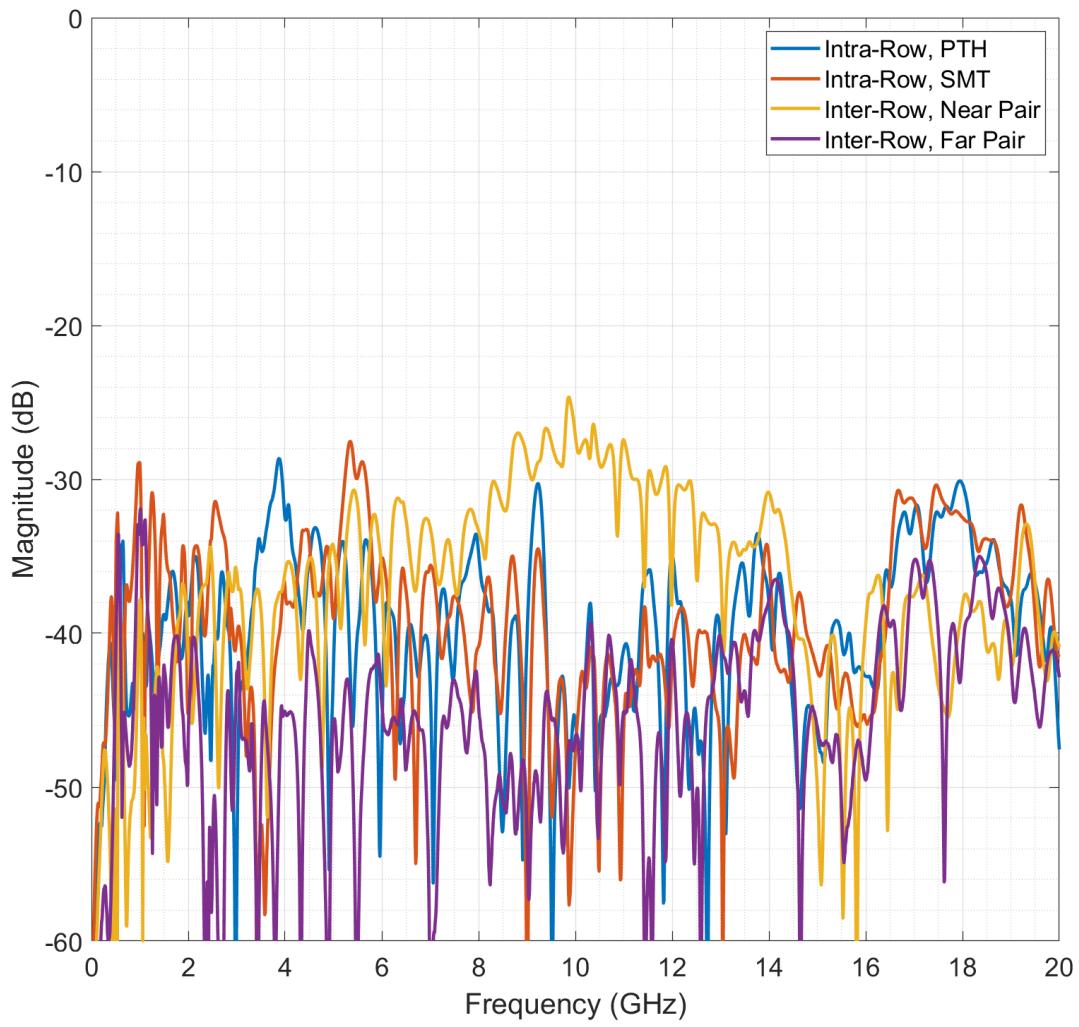


Figure 39. Straight to Right-Angle GHSM FEXT

Cable Assembly Results

6.3.3. Straight to Right-Angle GHSM TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

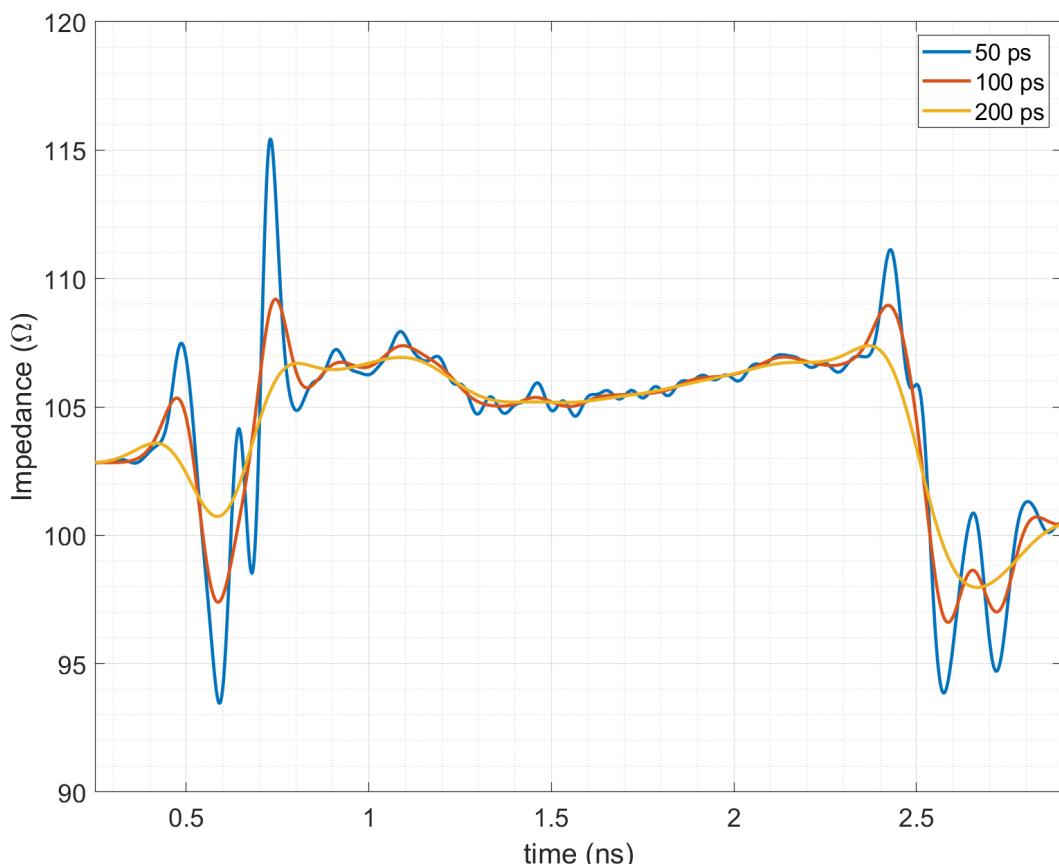


Figure 40. TDR – Straight to Right-Angle GHSM

Feed-Thru and Sav-Con Results

7. Feed-Thru and Sav-Con Results

7.1.Feed-Thru Performance

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the Feed-Thru and mating PCB board connectors.

7.1.1. Insertion Loss / Return Loss

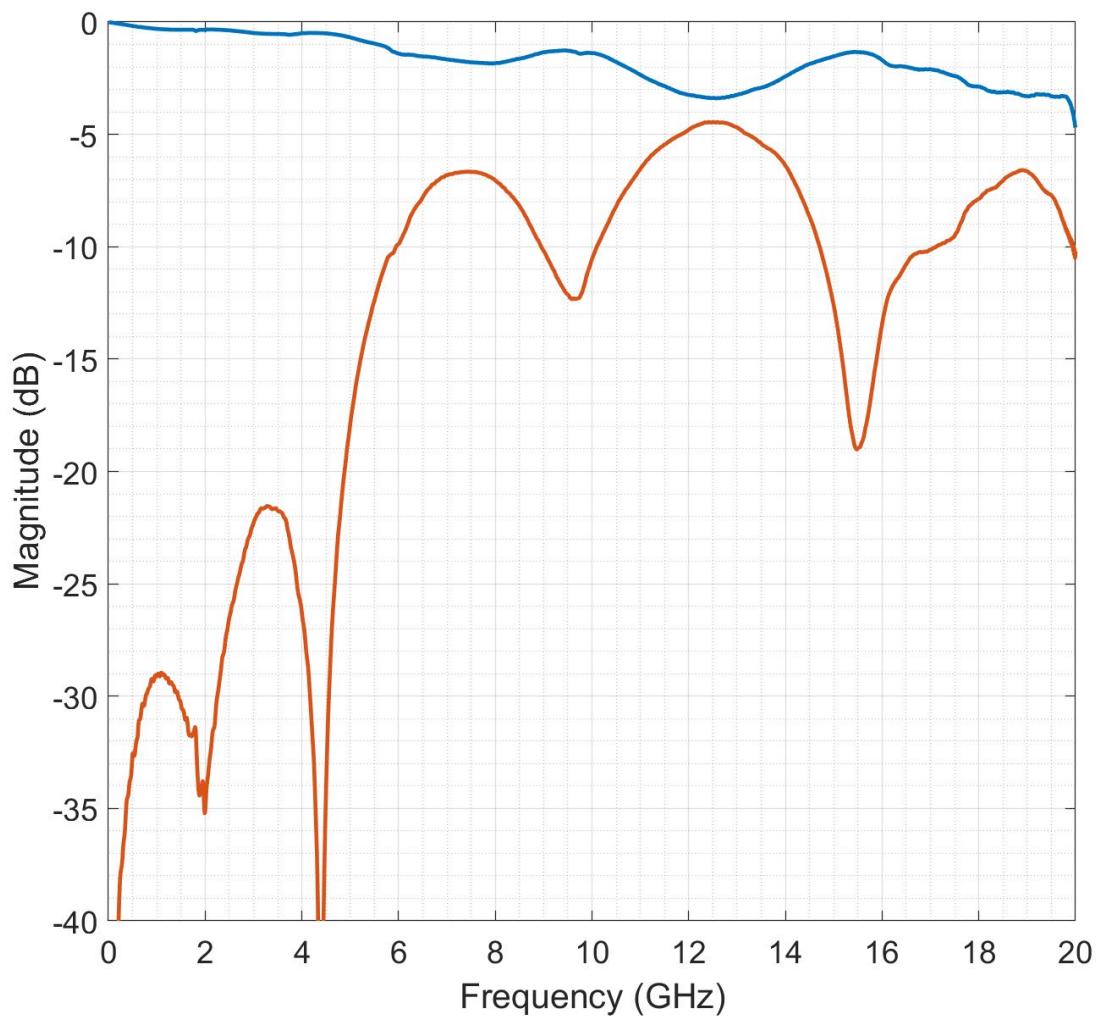


Figure 41. GHSM Feed-Thru Response

Feed-Thru and Sav-Con Results

7.1.2. Crosstalk

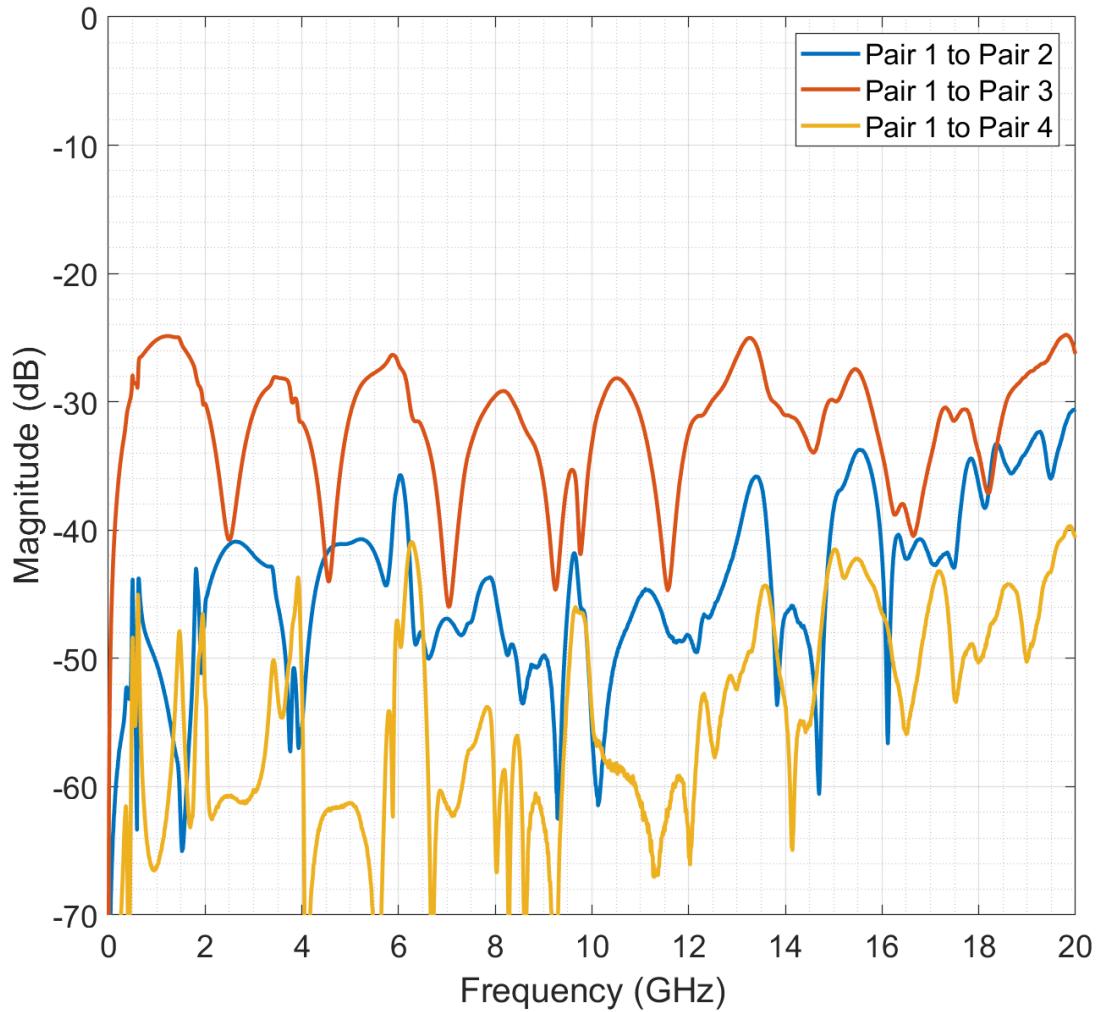


Figure 42. GHSM Feed-Thru NEXT

Feed-Thru and Sav-Con Results

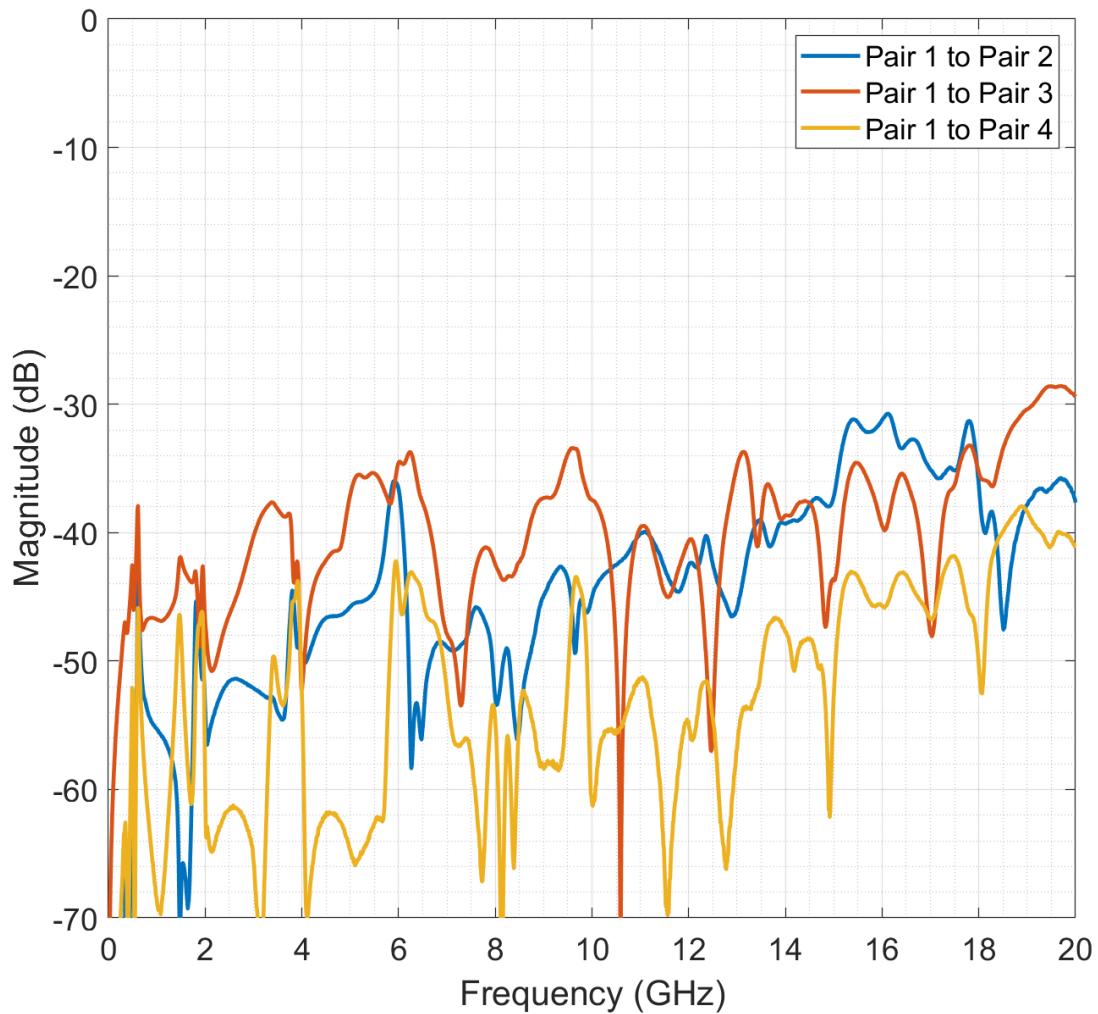


Figure 43. GHSM Feed-Thru FEXT

Feed-Thru and Sav-Con Results

7.1.3. TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

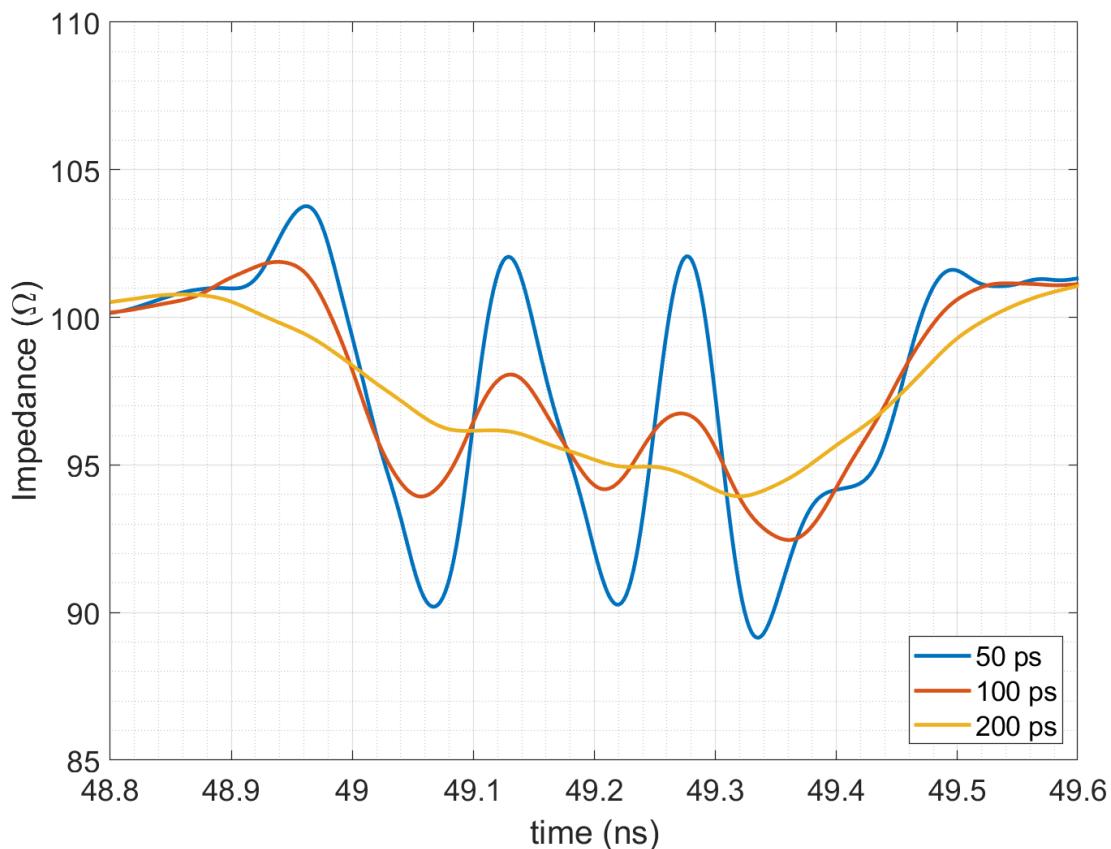


Figure 44. TDR – GHSM Feed-Thru

Feed-Thru and Sav-Con Results

7.2.Sav-Con Results

This section includes both frequency and time domain results. Test fixture PCB loss has been de-embedded to show the performance of the Sav-Con and mating PCB board connectors.

7.2.1. Insertion Loss / Return Loss

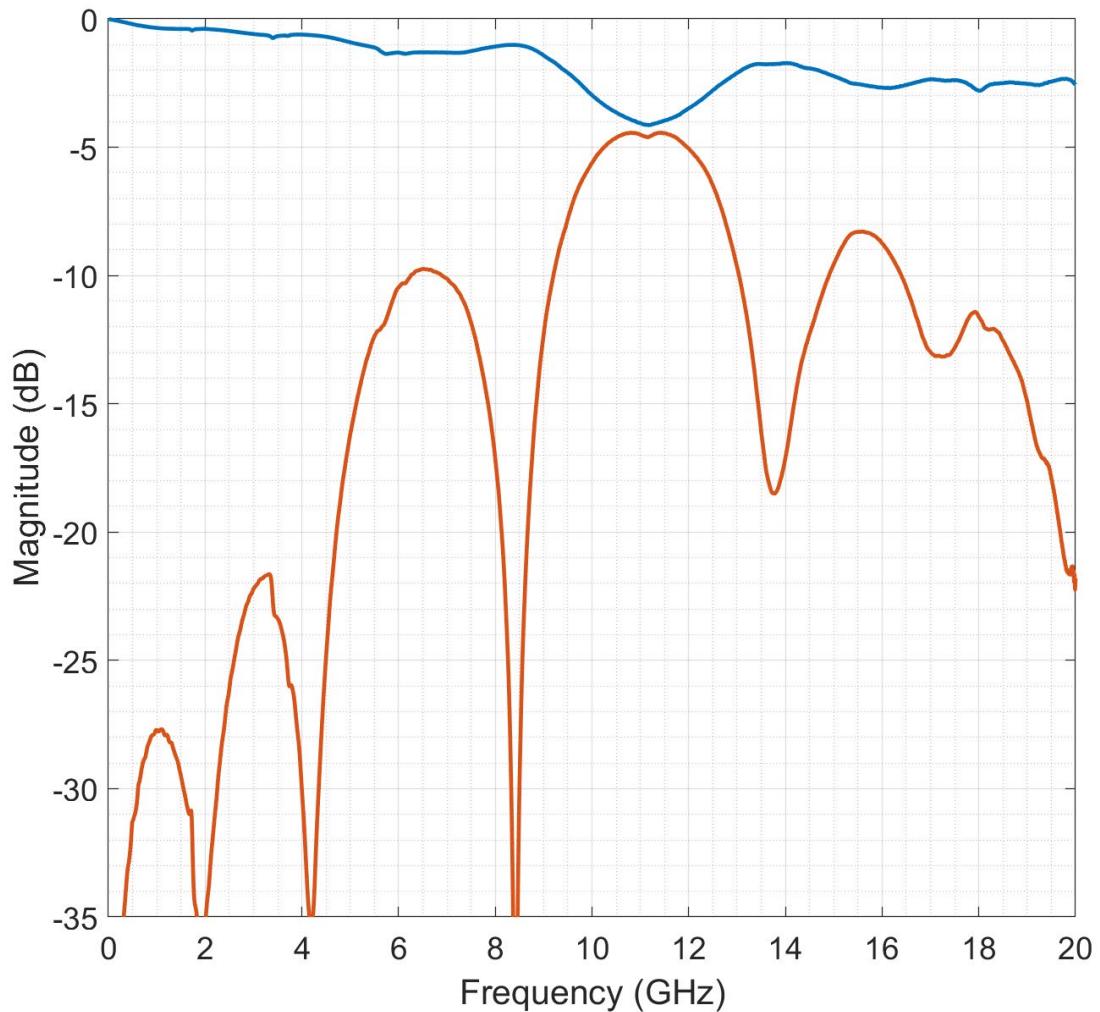


Figure 45. GHSM Sav-Con Response

Feed-Thru and Sav-Con Results

7.2.2. Crosstalk

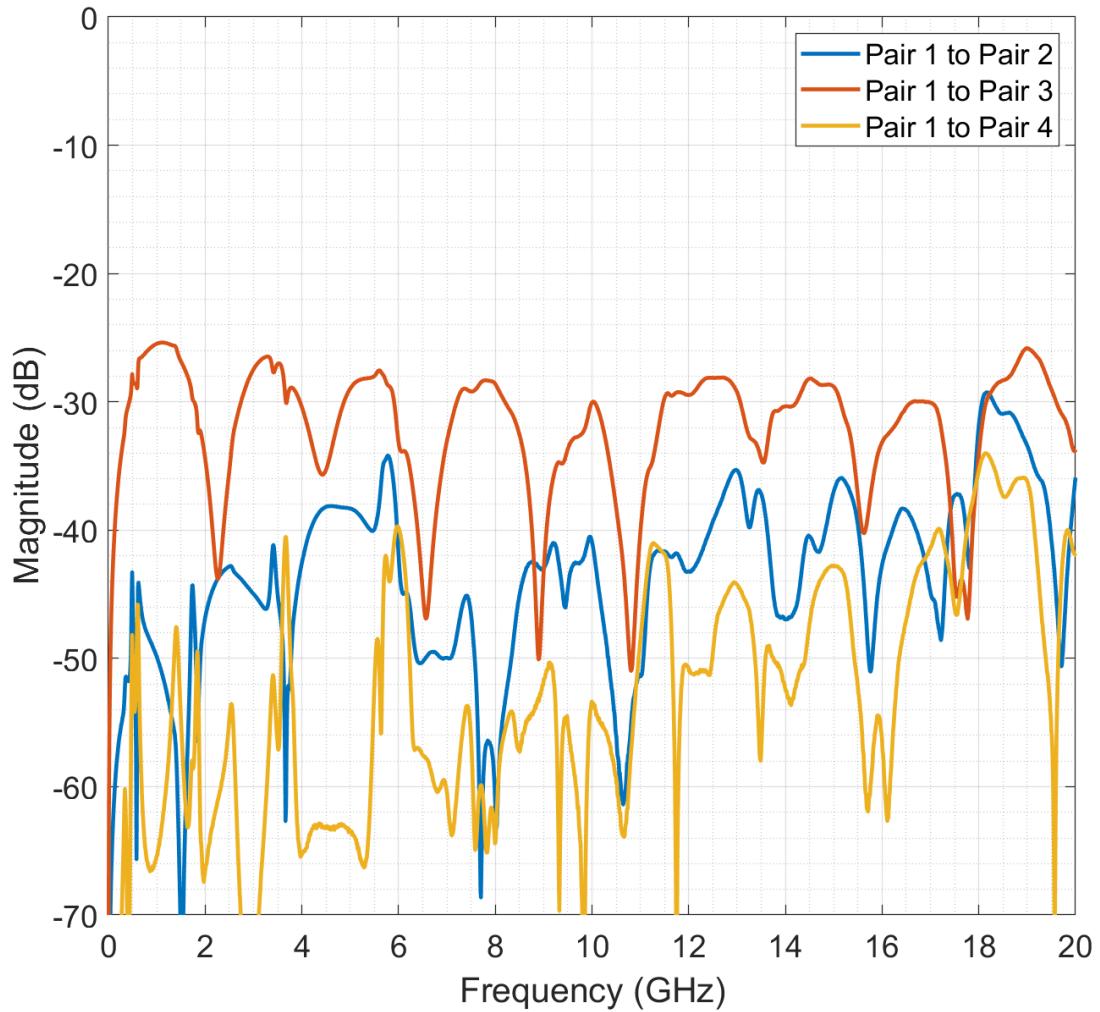


Figure 46. GHSM Sav-Con NEXT

Feed-Thru and Sav-Con Results

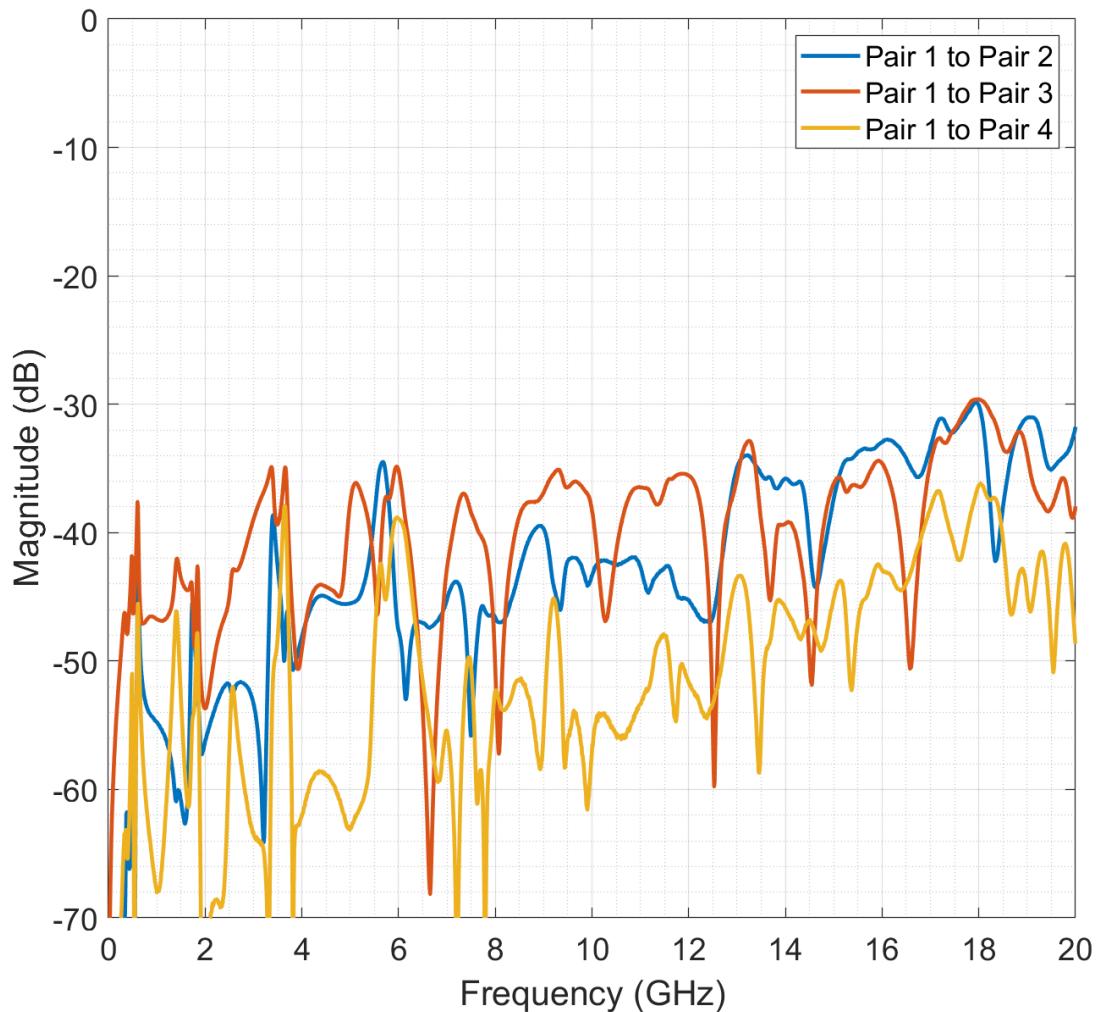


Figure 47. GHSM Sav-Con FEXT

Feed-Thru and Sav-Con Results

7.2.3. TDR

Time domain data was generated in real time using a Tektronix DSA8300 Digital Serial Analyzer. Graphs for each test cable and pair configuration are shown below for various rise times. Rise times of 50ps, 100ps, and 200ps were used. The following table shows the relative bandwidth, BW, for a given TDR test step rise time, t_r .

t_r (ps)	BW (GHz)
50	7.00
100	3.50
200	1.75

Table 1. Bandwidth to Rise Time Relationship

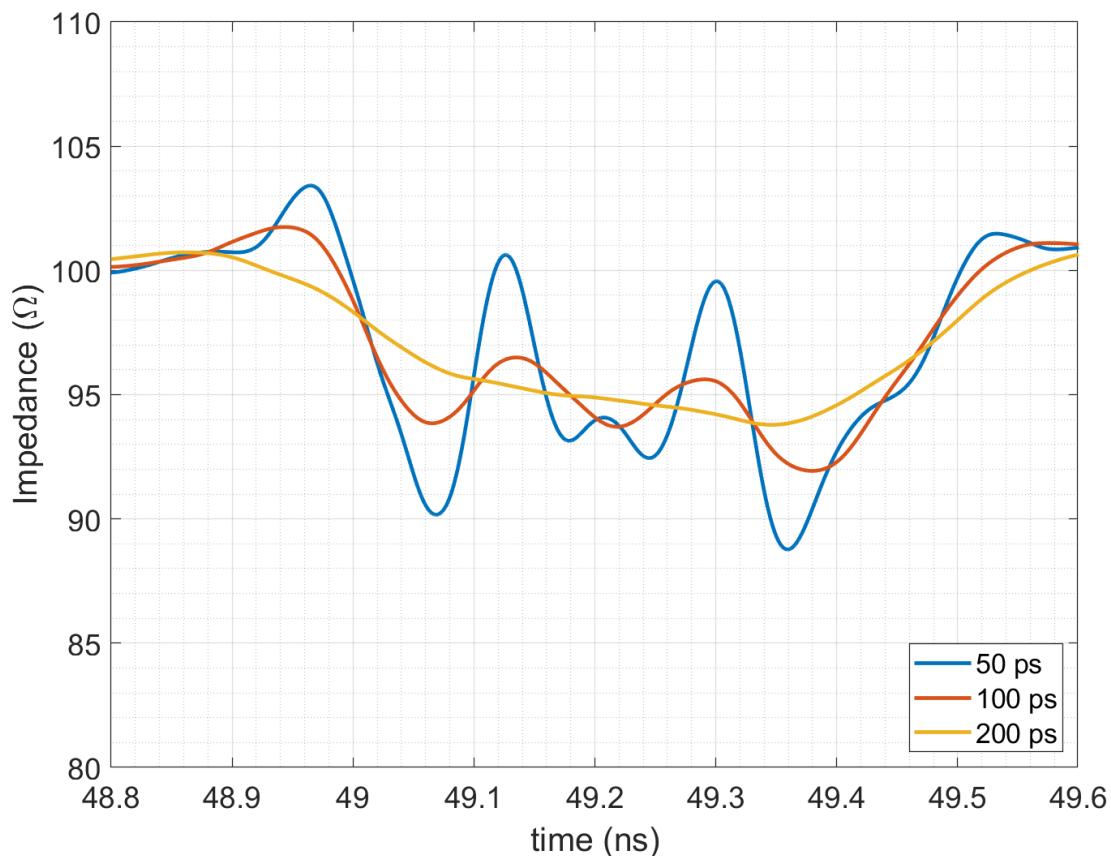


Figure 48. TDR – GHSM Sav-Con