




**712-843**  
**Heavy-Duty Environmental System - Composite**  
**Environmental, Self-Locking Conduit to Connector Backshell for**  
**Series 75 Metal-Core Conduit**




**Weight-saving composite Heavy-Duty Environmental System self-locking conduit to connector backshell**



**How To Order**

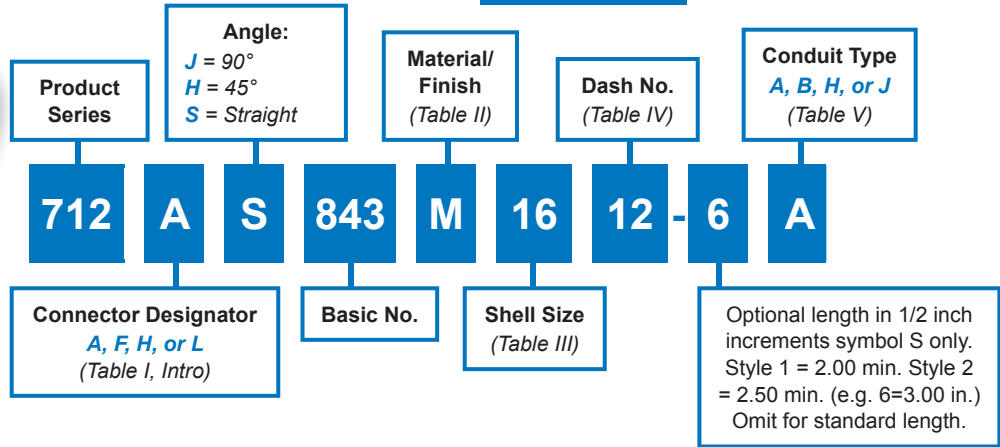

D

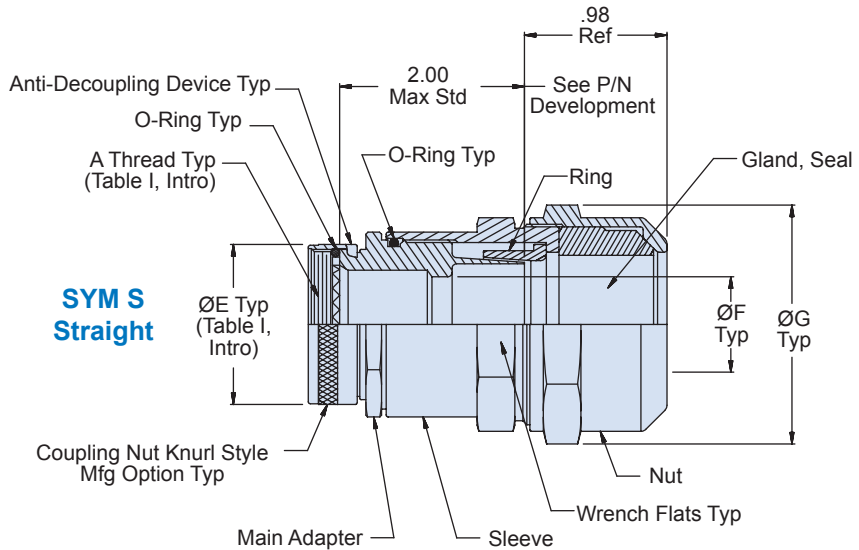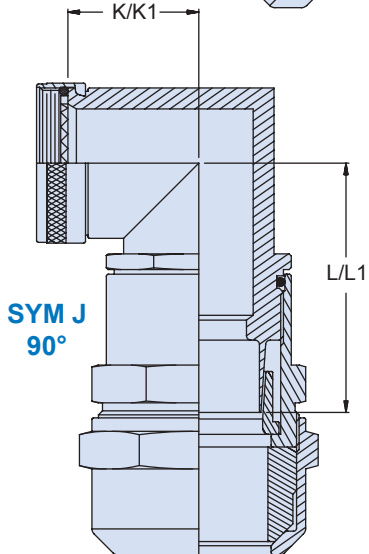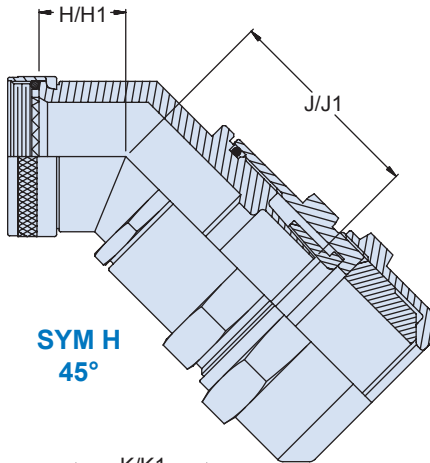

**Material and Finish**

- Adapters, Elbows, Coupling Nuts & Ring: See Table II
- Sleeves & Nuts: High Grade Engineering Thermoplastic, color Haze Gray/NA
- O-Ring & Gland Seal: Silicone Rubber/NA
- Anti-Decoupling Device: Corrosion resistant material/NA

**Notes**


- When conduit diameter exceeds max dash no. (Table III) Style 2 will be supplied (also see pages A-32 – A-33). Dimensions H1, J1, K1 and L1 apply to Style 2 angular fittings.
- O-Ring not supplied with connector designator A

712-843

**Heavy-Duty Environmental System - Composite Environmental, Self-Locking Conduit to Connector Backshell for Series 75 Metal-Core Conduit**



Series 75 Metal-Core Conduit

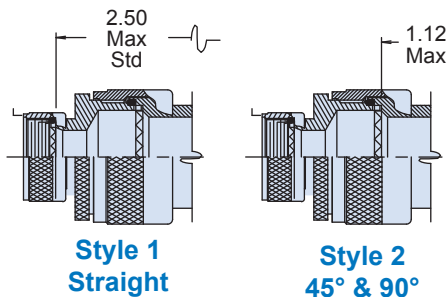

Shell Size		Max Dash No Style I	H Max	J Max	K Max	L Max
A, F, L	H					
08	09	08	0.71 (18.0)	1.63 (41.4)	0.88 (22.4)	1.90 (48.3)
10	11	12	0.74 (18.8)	1.66 (42.2)	0.95 (24.1)	1.97 (50.0)
12	13	16	0.76 (19.3)	1.70 (43.2)	1.02 (25.9)	2.07 (52.6)
14	15	20	0.79 (20.1)	1.73 (43.9)	1.12 (28.4)	2.14 (54.4)
16	17	24	0.81 (20.6)	1.76 (44.7)	1.19 (30.2)	2.21 (56.1)
18	19	24	0.83 (21.1)	1.78 (45.2)	1.19 (30.2)	2.21 (56.1)
20	21	32	0.86 (21.8)	1.82 (46.2)	1.32 (33.5)	2.38 (60.5)
22	23	32	0.88 (22.4)	1.85 (47.0)	1.32 (33.5)	2.38 (60.5)
24	25	40	0.92 (23.4)	1.88 (47.8)	1.45 (36.8)	2.52 (64.0)
28		40	1.07 (27.2)	1.91 (48.5)	1.52 (38.6)	2.52 (64.0)
32		48	1.12 (28.4)	1.97 (50.0)	1.66 (42.2)	2.65 (67.3)
36		48	1.16 (29.5)	2.01 (51.1)	1.66 (42.2)	2.73 (69.3)
40		64	1.21 (30.7)	2.07 (52.6)	1.99 (50.5)	2.97 (75.4)
44		64	1.26 (32.0)	2.11 (53.6)	1.99 (50.5)	3.09 (78.5)
48		80	1.31 (33.3)	2.18 (55.4)	2.26 (57.4)	3.21 (81.5)
61		40	0.92 (23.4)	1.87 (47.5)	1.45 (36.8)	2.52 (64.0)

Conduit Size Code	±5 Inch Pounds	
	Sleeve	Nut
08	120	40-60
12	120	
16	140	
20	140	
24	150	
32	170	
40	170	
48	170	
64	170	
80	170	40-60

Dash No	F.I.D.	Ø G Max	H1 Max	J1 Max	K1 Max	L1 Max
08	0.250 (6.4)	1.18 (30.0)	N/A	N/A	N/A	N/A
12	0.375 (9.5)	1.32 (33.5)	0.74 (18.8)	1.66 (42.2)	0.95 (24.1)	1.97 (50.0)
16	0.500 (12.7)	1.45 (36.8)	0.76 (19.3)	1.70 (43.2)	1.02 (25.9)	2.07 (52.6)
20	0.625 (15.9)	1.66 (42.2)	0.79 (20.1)	1.73 (43.9)	1.12 (28.4)	2.14 (54.4)
24	0.750 (19.1)	1.79 (45.5)	0.83 (21.1)	1.78 (45.2)	1.19 (30.2)	2.21 (56.1)
32	1.000 (25.4)	2.06 (52.3)	0.88 (22.4)	1.85 (47.0)	1.32 (33.5)	2.38 (60.5)
40	1.250 (31.8)	2.32 (58.9)	1.07 (27.2)	1.91 (48.5)	1.52 (38.6)	2.52 (64.0)
48	1.500 (38.1)	2.59 (65.8)	1.16 (29.5)	2.01 (51.1)	1.66 (42.2)	2.73 (69.3)
64	2.000 (50.8)	3.26 (82.8)	1.26 (32.0)	2.11 (53.6)	1.99 (50.5)	3.09 (78.5)
80	2.500 (63.5)	3.80 (96.5)	1.31 (33.3)	2.18 (55.4)	2.26 (57.4)	3.21 (81.5)

Conduit Type	Part Number	Configuration
A	750-192	Brass conduit with single braided shield and jacket
B	750-194	Brass conduit with double braided shield and jacket
H	750-192	Stainless steel conduit with single braided shield and jacket
J	750-192	Nickel/iron conduit with single braided shield and jacket

Sym	Material	Finish Description	Component
BO	Brass	Unplated	
BN	Brass	Cad/O.D. Over Electroless Nickel (1,000 Hour Salt Spray)	
BM	Brass	Electroless Nickel	
BMT	Brass	Nickel-PTFE	
M	Aluminum Alloy	Electroless Nickel	
MT	Aluminum Alloy	Nickel-PTFE	
NF	Aluminum Alloy	Cad/O.D. Over Electroless Nickel (1,000 Hour Salt Spray)	
Z1	300 Series SST	Passivate	
ZN	Aluminum Alloy	Zinc Nickel/Olive Drab Over Electroless Nickel (1,000 Hour Salt Spray)	
ZM	300 Series SST	Electroless Nickel	Adapter, Elbow
		Passivate	Coupling Nut
ZW	300 Series SST	Cad O.D. Over Electroless Nickel	Adapter, Elbow
		Cad Olive Drab	Coupling Nut