


FA04394

Fiber Optic Test Cable for 050-206 Media Converter D38999 / ARINC 801 Connector Interface



How To Order

Basic P/N	Material/Finish <i>M = Al/Nickel</i> <i>MT = Al/Nickel PTFE</i> <i>NF = Al/Olive Drab Cadmium</i> <i>Other finishes available, consult factory</i>	F/O Test Connector <i>LC = LC Connector</i> <i>Other options available</i>
FA04394	50	M
72	LC	N
Fiber Type <i>09 = Singlemode</i> <i>50 = 50/125</i> <i>62 = 62.5/125</i>	Cable Length <i>In Inches</i> <i>72 = 72 Inches standard</i> <i>Other lengths available</i>	Keyway Polarization <i>N = Normal</i> <i>Other options available</i>

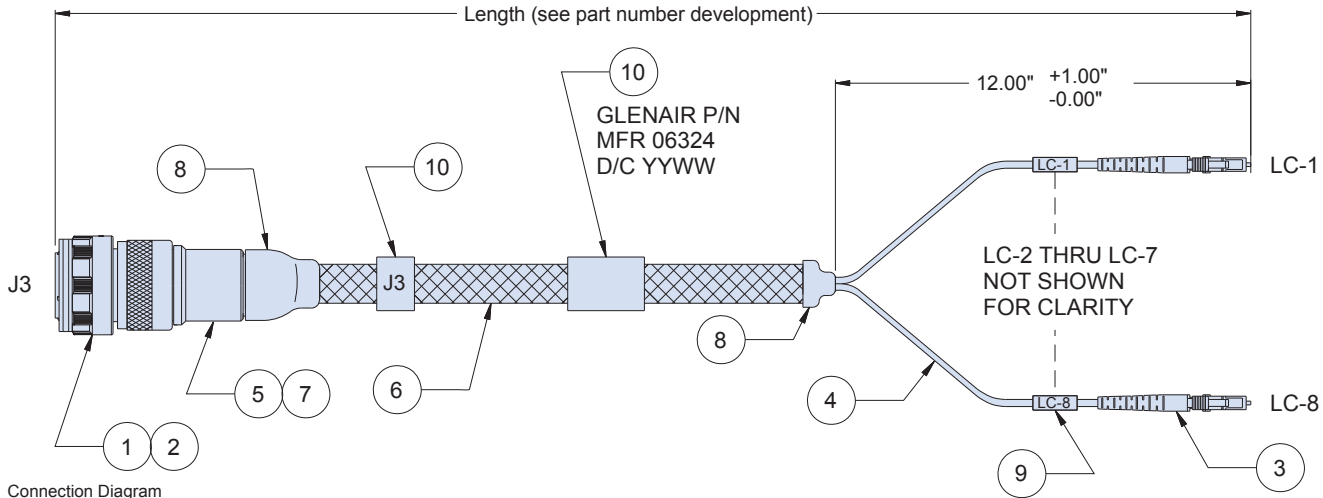

Connection Diagram

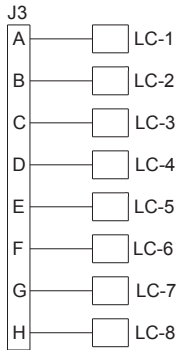


Diagram Key	
Callout	Description
1, 2	180-159 Fiber Optic plug connector / eight 181-076 pin termini
3	Eight single-channel LC fiber optic connectors (other options available, consult factory)
4	Simplex high-temperature fiber
5	440HS030 Glenair Backshell
6	Nomex braid
7	Band-Master ATS® shield termination strap
8	Heat shrink
9	Heat shrink
10	ID marker (marked with Glenair name, CAGE code and date code as indicated)

Standard Tolerance	
Length	Tolerance
5 in – 2 ft	+1 in -0
2 to 10 ft	+3 in -0
10 to 50 ft	+6 in -0
50 to 100 ft	+1 ft -0
100 ft and up	+2 ft -0

Notes

- Optical performance: insertion loss to be less than 1.5 dB when measured at 850 nm wavelength for Multimode and 1310 nm wavelength for Singlemode.