



Sav-Con[®] connector savers

MIL-DTL-83723 Series III


940-006, 941-006, 942-006 Bayonet Coupling



940-006 GENERAL DUTY, 941-006 ENVIRONMENTAL AND 942-006 HIGH RELIABILITY

How To Order	
Sample Part Number	94 0 L 006 M 16 G 24 P N 131
Series	94
Class	0 = General Duty 1 = Environmental 2 = High Reliability
Lock Ring (optional)	L = Lock Ring - (dash) = Standard
Basic Number	006
Finish	See Table I
Shell Size	See Dimensions Table
EMI Ground	G = EMI Ground Spring (optional) - = Standard
Insert Arrangement	See Table II
Contact Type	P = Pins, Plug Side S = Sockets, Plug Side
Alternate Key Position	1 through 10 , N = Normal; See Table III
Mod Code	131 = Dry Lube (Omit for None)

*Add Modification Code 131 for Dry Lubricant on inside surfaces of the Coupling Nut. May not be suitable for space applications.

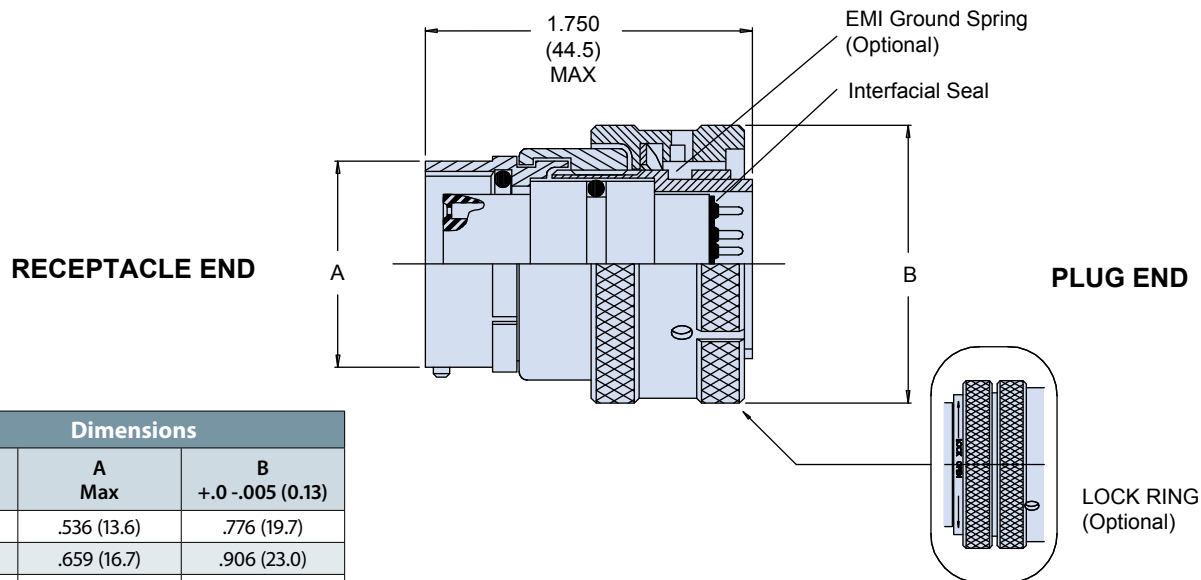

Dimensions		
Shell Size	A Max	B +.0 -.005 (0.13)
08	.536 (13.6)	.776 (19.7)
10	.659 (16.7)	.906 (23.0)
12	.829 (21.1)	1.078 (27.4)
14	.898 (22.8)	1.141 (29.0)
16	1.025 (26.0)	1.266 (32.2)
18	1.131 (28.7)	1.375 (34.9)
20	1.256 (31.9)	1.510 (38.4)
22	1.381 (35.1)	1.625 (41.3)
24	1.506 (38.3)	1.760 (44.7)

INTERMATEABLE WITH THE FOLLOWING CONNECTORS:

PAN 6433-2
PATT 615
NFC C93-422 (HE306)
VG 96912



Sav-Con® connector savers

MIL-DTL-83723 Series III


Reference Information




Plating Code	Material	Finish	
M	Aluminum	Electroless Nickel	
B		Cad Plate, Olive Drab	
NF		Cadmium Plate Olive Drab over Electroless Nickel	
NC		Zinc-Cobalt	
ZN		Olive Drab Zinc-Nickel	
MT		Ni-PTFE 1000 Hour Grey™ (Nickel Fluorocarbon Polymer)	
ZR		Zinc Nickel, Black	
ME		Electroless Nickel (RoHS)	
ZL		Stainless Steel	Electro-Deposited Nickel

Shell Size Desig.	Insert Arrangement Dash No.	Contact Size: Quantity		
		20	16	12
08	08-02	2		
	08-03	3		
	08-98	3		
10	10-2	2		
	10-5	5		
	10-6	6		
	10-20	2		
12	12-03		3	
	12-12	12		
14	14-04			4
	14-07		7	
	14-12	9	3	
16	14-15	15		
	16-10		10	
	16-24	24		

Shell Size Desig.	Insert Arrangement Dash No.	Contact Size: Quantity		
		20	16	12
18	18-08			8
	18-14		14	
	18-31	31		
20	20-16		16	
	20-25	19		6
	20-28	24		4
	20-39	37	2	
	20-41	41		
22	22-12			12
	22-19		19	
	22-32	26		6
	22-39	27	12	
	22-55	55		
24	24-19			19
	24-43	23	20	
	24-57	55		2
	24-61	61		

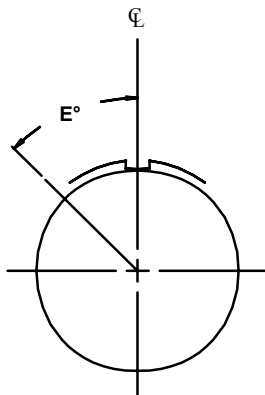

ROTATED PIN INSERT POSITION 1 THRU 5

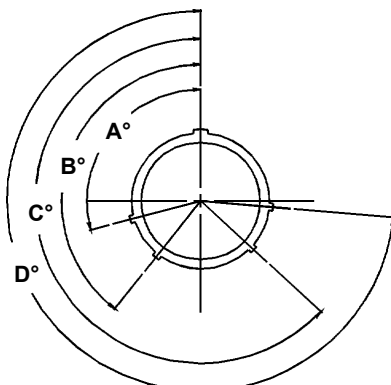

FACE VIEW RECEPTACLE POSITION N, 6 THRU 10

Alternate Key Position	Size 8				Size 10				Sizes 12 - 24				Insert Position
	A°	B°	C°	D°	A°	B°	C°	D°	A°	B°	C°	D°	
N = Normal	105	140	210	265	105	140	215	265	105	140	215	265	0
1	-	-	-	-	105	140	215	265	105	140	215	265	10
2	-	-	-	-	105	140	215	265	105	140	215	265	20
3	-	-	-	-	105	140	215	265	105	140	215	265	30
4	-	-	-	-	105	140	215	265	105	140	215	265	40
5	-	-	-	-	105	140	215	265	105	140	215	265	50
6	102	132	248	320	102	132	248	320	18	149	192	259	0
7	80	118	230	312	80	118	230	312	92	152	222	342	0
8	35	140	205	275	35	140	205	275	84	152	204	334	0
9	64	155	234	304	64	155	234	304	24	135	199	240	0
10	-	-	-	-	25	115	220	270	98	152	268	336	0

In alternate positions, the pin insert rotates clockwise while the socket insert rotates counterclockwise the same number of degrees relative to the center line of the master key or keyway.

Class	Pi - Circuit (pF)	C - Circuit (pF)
X*	160,000 - 240,000	80,000 - 120,000
Y*	80,000 - 120,000	40,000 - 60,000
Z*	60,000 - 90,000	30,000 - 45,000
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500

Class	Pi - Circuit (pF)	C - Circuit (pF)
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70-120	35-60

* Filter Classes X, Y and Z are 250 VDC. All others are 500 VDC

B