



APPLICATION NOTE

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 1 of 10
-------------------------	--	---

APPLICATION NOTE
Improving Insertion Loss Budgets by using VersaLink Bridge

WRITTEN BY: _____ DATE: _____
 Lane Blackwell / Bryan Samowitz

APPROVED BY: _____ DATE: _____
 Guido Hunziker

THIS COPYRIGHT DOCUMENT IS THE PROPERTY OF GLENAIR INC. AND IS FURNISHED ON THE EXPRESS CONDITION IT IS NOT TO BE DISCLOSED, PRODUCED IN WHOLE OR PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR INC. WITHOUT THE WRITTEN PERMISSION OF GLENAIR INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT PRIVATE EXPENSE AND MAY BE USED FOR THE PURPOSES OF ENGINEERING EVALUATION AND FOR INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR INC.



1211 AIRWAY, GLENDALE, CALIFORNIA 91201

APPLICATION NOTE

Improving Insertion Loss Budgets by using VersaLink Bridge

CODE NUMBER 06324	SIZE A	AN0011	REV. A
SCALE N/A		SHEET 1 OF 10	

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 2 of 10
-------------------------	---	---

REVISION HISTORY

REVISION	DATE	REVISED PAGES	REVISIONS
1	4/14/2021		Engineering Release

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 3 of 10
-------------------------	---	---

Table of Contents

1.0	Purpose	4
2.0	Referenced Documents	4
3.0	Responsibility	4
4.0	VersaLink Bridge to PCB Microstrip Performance Comparison.....	5
4.1	Measured Performance	5
4.2	Cable Considerations.....	7
4.3	PCB Material Effects.....	8
4.4	Summary	10

Table of Figures

Figure 1 – Comparison Test Articles	5
Figure 2 – Installation/Connection of VersaLink Bridge	6
Figure 3 – VersaLink Bridge and PCB Microstrip Insertion Loss	6
Figure 4 – Twinax Cable Insertion Loss	7
Figure 5 – Measured Cable Loss to Estimate Loss Fit	8
Figure 6 – 12” Link Insertion Losses.....	9
Figure 7 – 12” Link Insertion Losses.....	9
Figure 8 – 12” Link Insertion Loss at 10GHz.....	10

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 4 of 10
-------------------------	---	---

1.0 Purpose

This document describes the advantage of using Glenair's VersaLink Bridge solution to maintain high speed signal integrity that is otherwise degraded when a conventional PCB microstrip topology is employed.

2.0 Referenced Documents

Document Number/Name	Description
GT-19-284	Signal Integrity Characterization Report For Glenair VersaLink Connectors
853-064	VersaLink Pin Connector
853-065 and 853-067	VersaLink PCB Connectors
691-CB151	VersaLink Connector Test PCB
691-CB232	Microstrip Test PCB
963-043-26	100 Ohm Impedance Matched Twinax Cable
691-CB229	Twinax Cable to SMA Test PCB

3.0 Responsibility

This document is the responsibility of the Engineering team.

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 5 of 10
-------------------------	---	---

4.0 VersaLink Bridge to PCB Microstrip Performance Comparison

4.1 Measured Performance

Twelve-inch and six-inch PCB microstrip signal data was measured and compared to VersaLink Bridge test data. Test articles used for this note are depicted in Figure 1.

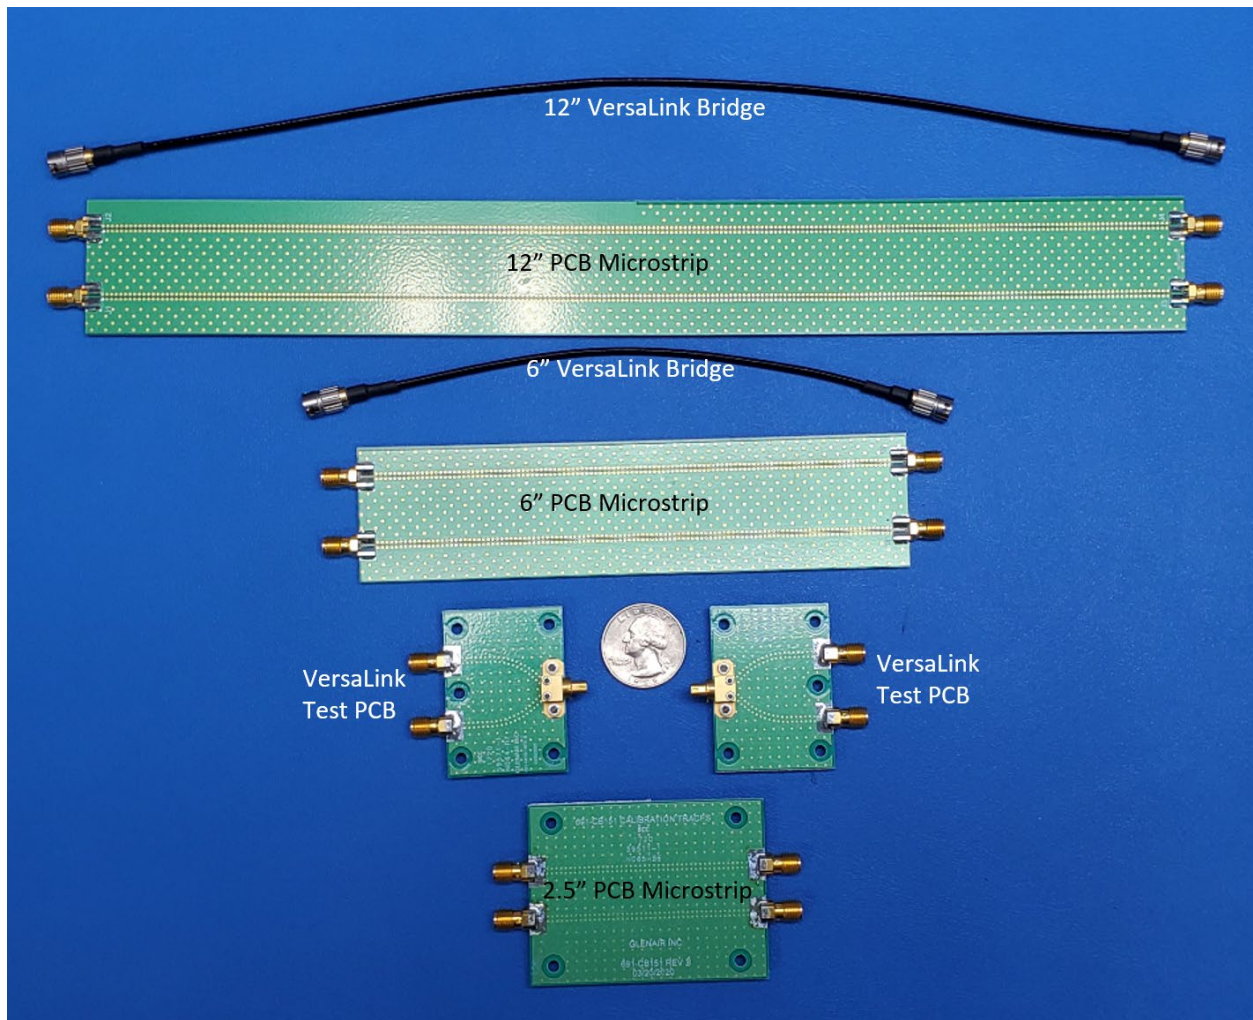


Figure 1 – Comparison Test Articles

Figure 2 shows the PCB installation and connection of the VersaLink Bridge.

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 6 of 10
-------------------------	---	---

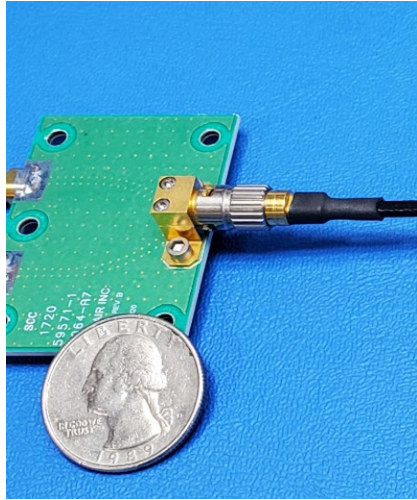


Figure 2 – Installation/Connection of VersaLink Bridge

Further details of the VersaLink Bridge test can be found in Glenair test report GT-19-284.

Insertion losses of the test cases are shown in Figure 3.

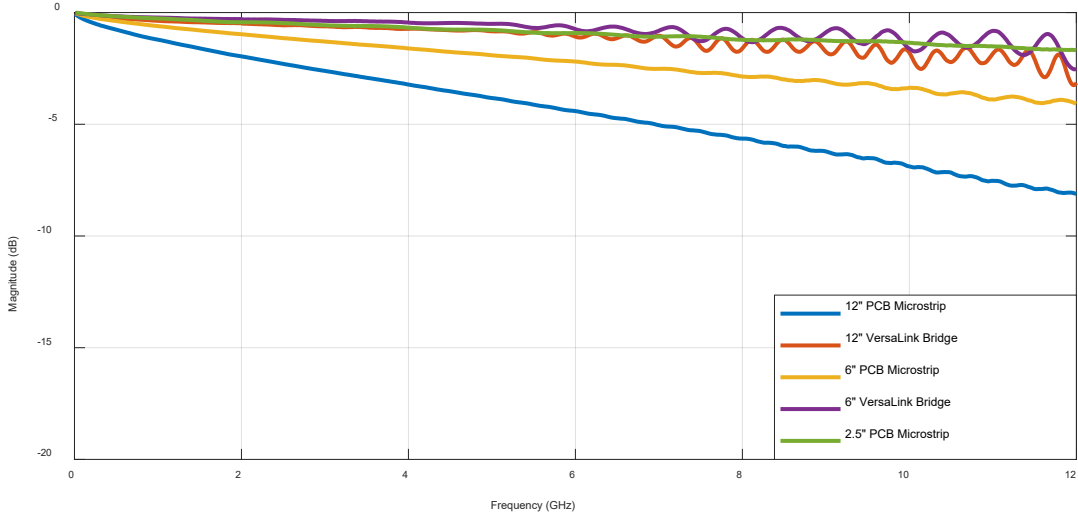


Figure 3 – VersaLink Bridge and PCB Microstrip Insertion Loss

Note that the 12" VersaLink Bridge insertion loss performance matches closely with that of the 2.5" PCB differential microstrip. An equivalent length VersaLink Bridge gains 5dB of channel margin over a very low loss 12" PCB differential microstrip at 10GHz (20Gb/s data rate).

The monotonic drop of the insertion losses was fitted with first order equations and Table 1 shows the loss rate (slope) as a function of frequency.

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 7 of 10
---------------------	--	---

Item	Loss Rate (dB/GHz)
2.5" PCB Microstrip	-0.13
6" PCB Microstrip	-0.31
12" PCB Microstrip	-0.63
6" VersaLink Bridge	-0.12
12" VersaLink Bridge	-0.18

Table 1 – Loss Rates

The VersaLink Bridge has the advantage of a much lower loss per hertz as compared to a PCB microstrip topology. A 12" PCB microstrip has a loss rate 3.5 times greater than that of a 12" VersaLink Bridge.

4.2 Cable Considerations

An important component of the VersaLink Bridge is the cable. Glenair cable 963-043-26 was used for the VersaLink Bridge tests of Section 4.1. High-speed data was measured for three lengths of 963-043-26 using the Twinax to SMA test PCB, part number 691-CB229. The resulting insertion loss is presented in Figure 4.

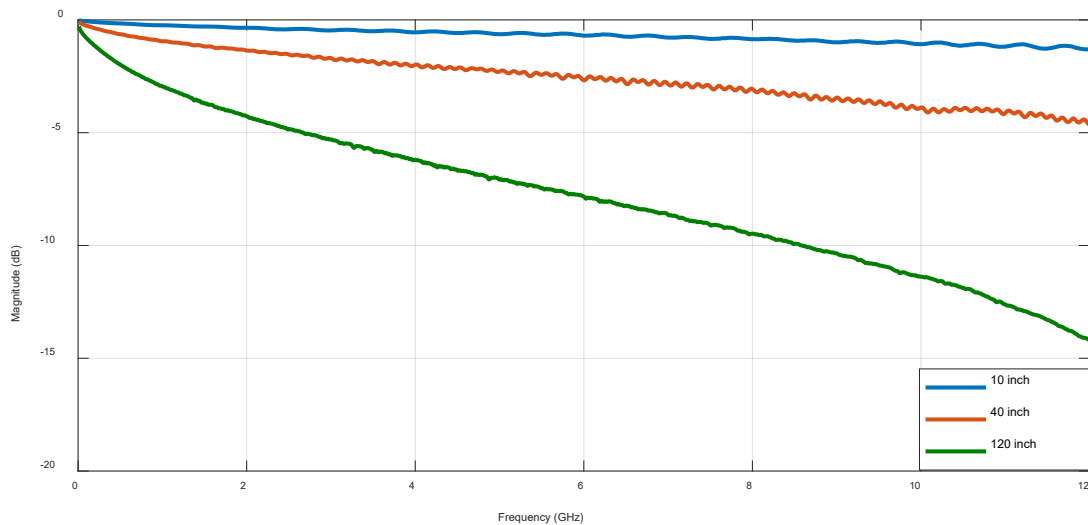


Figure 4 – Twinax Cable Insertion Loss

The following RF cable loss formula was used to calculate the 963-043-26 K factors from fitting the normalized insertion loss data:

$$\alpha = K1\sqrt{f} + K2 * f$$

where,

α is attenuation in dB/100ft, and f is frequency in MHz

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 8 of 10
-------------------------	---	---

The resulting K factors for 963-043-26 are:

K1 = 0.6803

K2 = 0.004677

Figure 5 shows a plot of the K factor derived cable loss fit against measured insertion loss data.

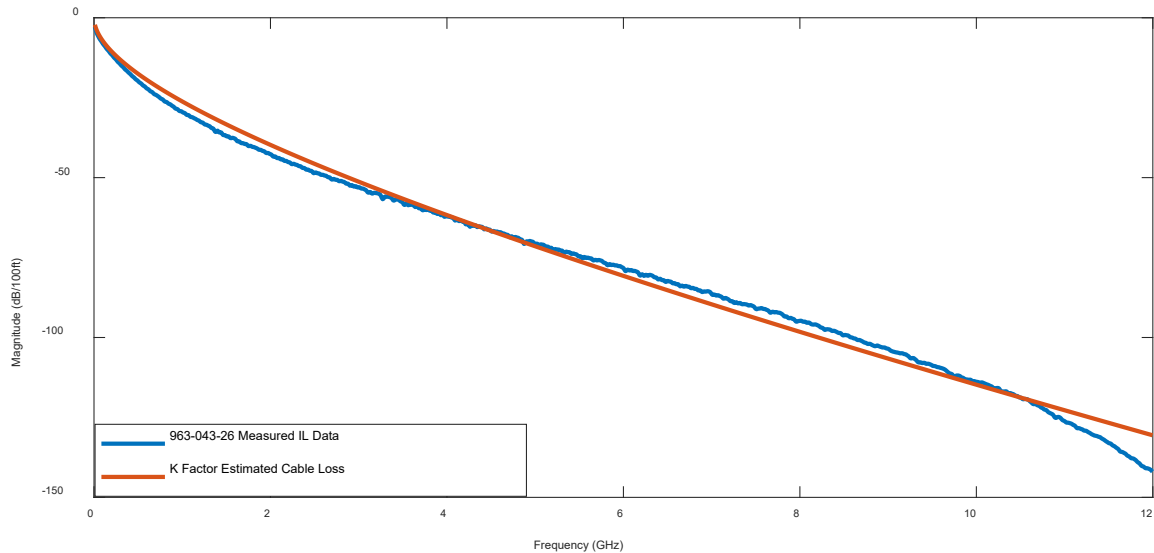


Figure 5 – Measured Cable Loss to Estimate Loss Fit

Table 2 compares the K values of a couple of similarly sized coaxial cables.

Manufacturer	Cable	K1	K2
Times Microwave Systems	SF-316	0.708	0.0012
Harbour Industries	LL120	0.41	0.0001785
Glenair	963-043-26	0.6803	0.004677

Table 2 – K Value Comparison

4.3 PCB Material Effects

Another important consideration is that the measured PCB microstrip performance data of Section 4.1 is obtained from boards with very low loss microwave grade PCB material (Dk = 2.9, Df = 0.002). Further advantage of the VersaLink Bridge can be seen over common high-speed PCB materials employing a microstrip topology. A case for a 12” link is considered below.

Using PCB signal integrity tools, insertion loss for a 12” microstrip was calculated for various high-speed PCB materials. Figure 6 graphs the insertion loss of a 12” VersaLink Bridge (measured) and various 12” high-speed PCB microstrips (measured and simulated).

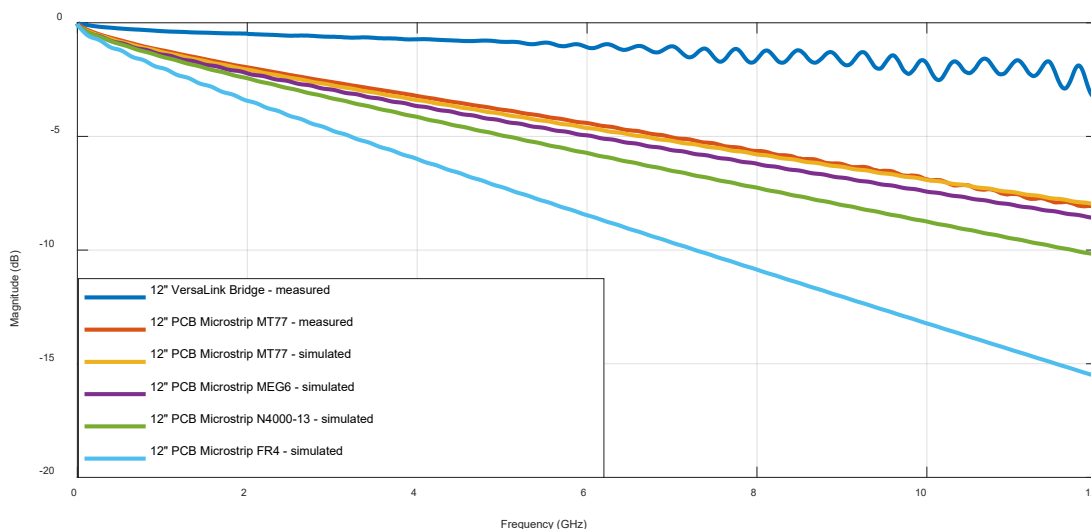


Figure 6 – 12" Link Insertion Losses

Figure 7 shows only the measured 12" PCB IL data and the simulated MT77 data to validate the accuracy of the simulated data.

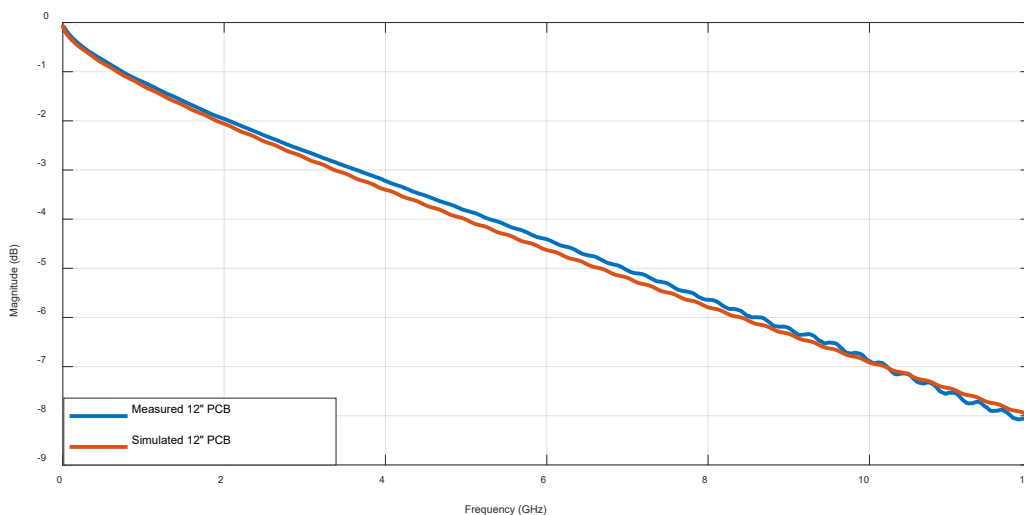


Figure 7 – 12" Link Insertion Losses

So, it can be seen that even more margin is gained by using the VersaLink Bridge over more common high-speed PCB materials.

Cage Code: 06324	Document Description APPLICATION NOTE Improving Insertion Loss Budgets by using VersaLink Bridge	Document #: AN0011 Revision: A Page 10 of 10
-------------------------	---	--

4.4 Summary

Direct measurements show the VersaLink Bridge solution provides better signal integrity, thus dB gain, over PCB microstrips. Figure 8 summarizes the loss/ft at 10GHz for the VersaLink Bridge and the PCB microstrip materials.

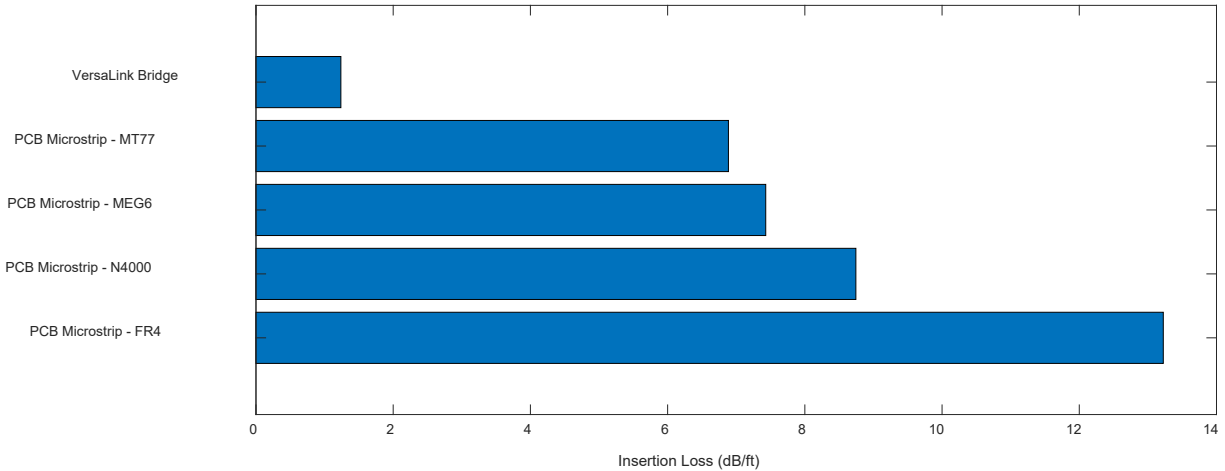


Figure 8 – 12" Link Insertion Loss at 10GHz