

UL recognized, with Duralectric™ D Jacket, 1000 VAC
961-065

961-065 TURBOFLEX, 1000 VAC, UL RECOGNIZED

Glenair TurboFlex
961-065 is UL recognized




meets UL 758 Style 3644

How to Order TurboFlex®				
Sample Part Number	961-065	-N	-D	-2
Basic No.	TurboFlex, UL recognized, with Duralectric D Jacket			
Conductor Material	-N = Nickel/Copper (-60°C – 200°C)			
Wire Size (See Table I)	T, R, S, A, B, C, D, E, F, G, H, I, J, K, L			
Duralectric D Jacket Color	See Table II			

AWG Code	AWG	Strand / Count / AWG	Cir Mil (nom)	Ø B in. (mm)	DC Resistance @ 20°C (Ohms / 1000 ft.)		Ampacity (Amps) 40°C Ambient (per NEC Table 310.19)
					Nickel	Copper	Nickel Copper
T	20	42-36	1050	.037 (.94)		10.7178	16
R	16	7 X 15/36	2625	.063 (1.60)		4.5510	40
S	14	7 X 24/36	4200	.080 (2.03)		2.8450	59
A	12	7 X 37/36	6475	.099 (2.51)		1.8450	78
B	10	7 X 59/36	10325	.126 (3.20)		1.1570	107
C	8	7 X 95/36	16625	.159 (4.04)		.7188	142
D	6	7 X 150/36	26250	.200 (5.08)		.4551	205
E	4	7 X 7 X 34/36	41650	.271 (6.88)		.2979	278
F	2	7 X 7 X 54/36	66150	.342 (8.69)		.1876	381
G	1/0	7 X 7 X 86/36	105350	.431 (10.95)		.1178	532
H	2/0	7 X 7 X 108/36	132300	.483 (12.27)		.0938	591
I	3/0	19 X 7 X 51/36	169575	.547 (13.89)		.0738	708
J	4/0	19 X 7 X 64/36	212800	.613 (15.57)		.0588	830
K	250 MCM	19 X 7 X 75/36	249375	.663 (16.84)		.0502	910
L	450 MCM	19 X 7 X 135/36	448875	.890 (22.61)		.0278	1320

Weatherproof, halogen free, flame resistant, functional to 200°C		
0	Black	Fed-Std-595C #17038
1	Brown	[TBD]
2	Red	Fed-Std-595C #11120
3	Orange	Fed-Std-595C #12300
4	Yellow	Fed-Std-595C #13591
5	Kelly Green	Fed-Std-595C #14193
6	Blue	Fed-Std-595C #15125
7	Violet	Fed-Std-595C #17142
8	Gray	Fed-Std-595C #26270
9	White	Fed-Std-595C #17875
OG	Dark Olive Green	Fed-Std-595C #34094
DT	Desert Tan	Fed-Std-595C #33446

Consult factory for other specific Fed Std colors

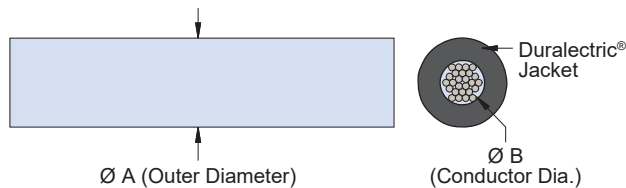

NOTES

1. Bend radius is 3X the outer diameter
2. Cable will be marked with "GLENNAIR TURBOFLEX", wire gauge, part number, CAGE 06324, UL 758 AWM 3644, 1000VAC, 200°C.
3. Jacket thickness tolerance is ±.005 for .035" thickness, and ±10% for for all other sizes.

SERIES 96

turboflex ultra-flexible power distribution cable



UL recognized, with Duraelectric™ D Jacket, 1000 VAC
961-065

961-004 Wire Weight and Outer Diameter			
AWG Code	Weight lbs/1000 ft. (nom.)	Ø A in. (mm)	Jacket wall thickness in. (mm)
T	8.1	.107 (2.72)	.035 (.89)
R	15.2	.133 (3.38)	
S	21.5	.150 (3.81)	
A	30.3	.169 (4.29)	
B	50.8	.196 (4.98)	.050 (1.27)
C	82.6	.259 (6.58)	
D	119.7	.330 (8.38)	.065 (1.65)
E	185.7	.401 (10.19)	
F	278.6	.472 (11.99)	
G	446.8	.601 (15.27)	.085 (2.16)
H	548.4	.653 (16.59)	
I	693.1	.717 (18.21)	
J	854.7	.783 (19.89)	
K	1014.3	.863 (21.92)	.100 (2.54)
L	1754.2	1.090 (27.69)	

Ambient Temperature Correction Factors	
Ambient Temp (°C)	For ambient temperatures other than 40°C (104°F), multiply the ampacity by the appropriate factor below
41 – 50	0.97
51 – 60	0.94
61 – 70	0.90
71 – 80	0.87
81 – 90	0.83
91 – 100	0.79
101 – 120	0.71
121 – 140	0.61
141 – 160	0.50
161 – 180	0.35
181 – 200	----
201 – 225	----

961-065 UL recognized TurboFlex environmental performance	
Temperature rating	Duraelectric D: -60°C to 200°C
Halogen free	per IEC 60614-1
Accelerated weathering and simulated solar radiation at ground level	per IEC 60068-2-5; 56 Days exposure, suitable for greater than 50 years of service in direct sunlight
Flame resistant	per IEC 60614-1
Flame resistant	per UL 1685, section 12 (FT4/IEEE120), vertical-tray fire-propagation and smoke release test
Flame resistant	per FAR 25.853 (A) amendment 25-116, appendix F part I (A) (1) (i), 60 second vertical burn test
Limiting oxygen index	45 per ISO 4589-2:1999
Low smoke	per NES 711, smoke density of 11.75
Smoke density	class F1 per NF F 16-101 IAW DIN EN 60695-2-11:2011
Low smoke toxicity	per NES 713, tested value of 1.9
Fungus rating	0 per MIL-STD-810g method 508.5, Does not support fungal growth
Tear Strength	ASTM D624, die B, 150 pounds per inch minimum on jacket material
Low outgassing	per ASTM e595 after post curing, TML .06%, CVCM .006%, WVR .02%
Resistant to fluids	per MIL-STD-810F, method 504: JP-8 per MIL-DTL-83133 (NATO type 34) MIL-H-5606 hydraulic fluid MIL-PRF-23699 lubricating oil MIL-C-85570 cleaner TT-I-735 Isopropyl alcohol AMS 1432 potassium acetate deicing/anti-icing fluid MIL-C-87252 coolant Amerex AFF fire extinguishing foam