
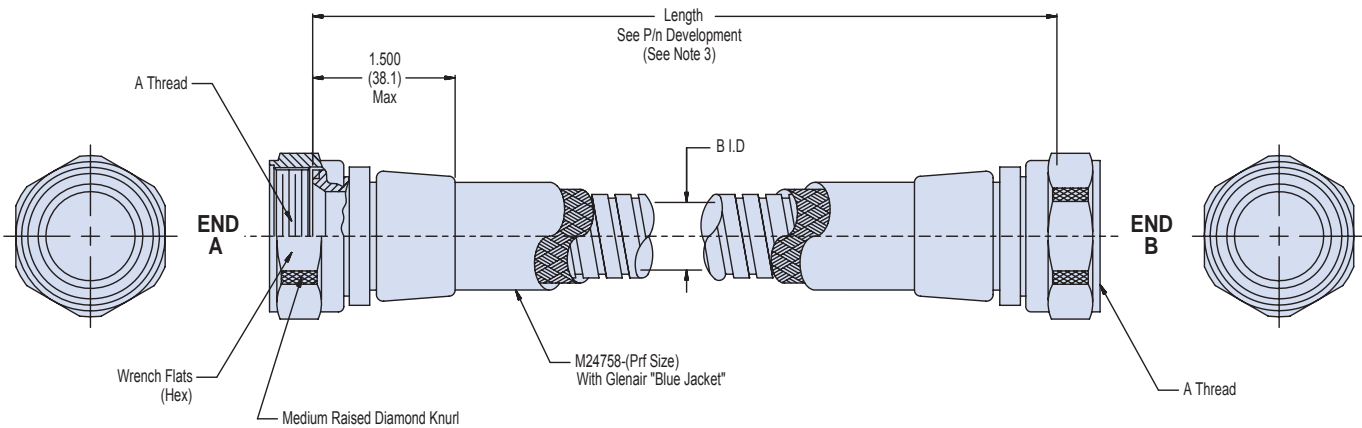


A

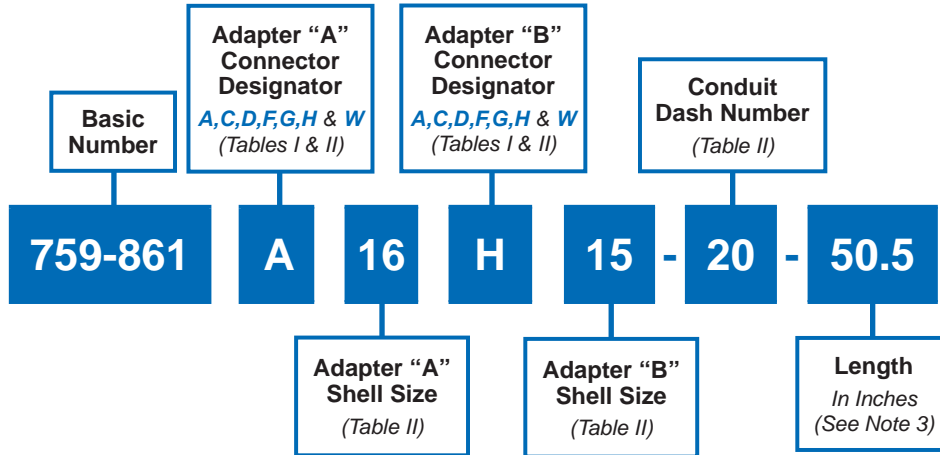

APPLICATION NOTES

1. Assembly identified with manufacturer's code identification.
2. Glenair 600 series backshell assembly tools are recommended for assembly installation.
3. Length tolerance is 0-24" = $\pm 1/4"$, for longer lengths is $\pm 1\%$ of length.
4. Material / Finish:
Adapter, ferrule & coupling nut - AISI 316L stainless steel / electroless nickel, matte finish.
5. Metric dimensions (mm) are indicated in parentheses.

759-861
Connector to Connector
Factory Terminated Conduit Assembly



MIL-PRF
24758A

A

TABLE I: CONNECTOR CODE

| CONN. CODE | SPECIFICATION |
|------------|---|
| A | MIL-DTL-5015 (MS34**) MIL-DTL-26482 Series II MIL-DTL-83723 Series I, III |
| C | MIL-C-22992 Series R |
| D | MIL-C-26482 Series I |
| F | MIL-DTL-38999, Series I |
| G | MIL-C-28840 |
| H | MIL-DTL-38999 Series III, IV |
| W | Glenair Series 22 (Geo-Marine®) |

TABLE II: CONDUIT DASH NO.

| CONDUIT DASH NO | MIL PRF SIZE | B MIN. |
|-----------------|--------------|---------------|
| 08 | A | .245 (6.22) |
| 12 | J | .370 (9.40) |
| 16 | B | .495 (12.57) |
| 20 | K | .620 (15.75) |
| 24 | C | .745 (18.92) |
| 32 | D | .995 (25.27) |
| 40 | E | 1.245 (31.62) |
| 48 | F | 1.495 (37.97) |
| 64 | G | 1.995 (50.67) |
| 80 | H | 2.495 (63.37) |
| 96 | L | 2.995 (76.07) |