


SERIES 28  
HiPer-D® Accessories



Conductive dust caps for HiPer-D® connectors  
289-052

CONDUCTIVE DUST CAPS

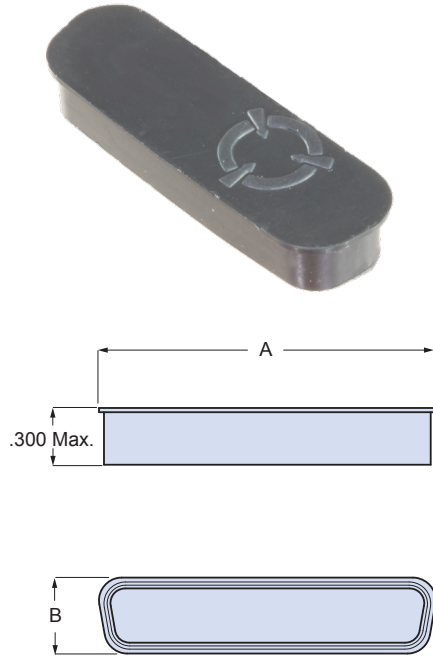

Black plastic conductive dust caps fit HiPer-D® and M24308-type D-subminiature connectors. Molded in conductive polyethylene copolymer (EVA), these caps provide electrostatic discharge protection to sensitive equipment. 140°F maximum service temperature. These caps meet the static decay requirement of MIL-PRF-81705. Surface resistivity is less than  $1 \times 10^5$  ohms/square. Integral lip allows easy removal.

Conductive Dust Caps						
Shell Size	Type	Part Number	A		B	
			In.	mm.	In.	mm.
1	Pin	<a href="#">289-052-1-P</a>	0.86	21.84	0.51	12.95
	Socket	<a href="#">289-052-1-S</a>	0.79	20.07	0.45	11.43
2	Pin	<a href="#">289-052-2-P</a>	1.19	30.23	0.51	12.95
	Socket	<a href="#">289-052-2-S</a>	1.10	27.94	0.45	11.43
3	Pin	<a href="#">289-052-3-P</a>	1.70	43.18	0.52	13.21
	Socket	<a href="#">289-052-3-S</a>	1.66	42.16	0.46	11.68
4	Pin	<a href="#">289-052-4-P</a>	2.37	60.20	0.52	13.21
	Socket	<a href="#">289-052-4-S</a>	2.29	58.17	0.45	11.43
5	Pin	<a href="#">289-052-5-P</a>	2.27	57.66	0.62	15.75
	Socket	<a href="#">289-052-5-S</a>	2.21	56.13	0.56	14.22
6	Pin	<a href="#">289-052-6-P</a>	2.40	60.96	0.69	17.53
	Socket	<a href="#">289-052-6-S</a>	2.33	59.18	0.63	16.00