


Hazardous Zone Fixed In-Line Receptacle

for Ex cable gland




927-072-022 FIXED IN-LINE RECEPTACLE WITH ENVIRONMENTAL CABLE ADAPTER FOR EX CABLE GLAND

How To Order							
Sample Part Number	927-072	-022	-36-66	P1	F9	Y	/A0
Series	927-072						
Style	-022 = Ex Cable Gland						
Shell Size - Insert Arrangement	See pages 22- 31						
Contact Type and Plating	P = Pin Contact, S = Socket Contact 1 = Silver Plated, 2 = Gold Plated						
Shell Material and Finish	F9 = Aluminium Alloy, Anodize Hardcoat						
Alternate Key Position	X, Y, Z, W (See Table on page 32) Omit for normal position						
Cable Range	A0, B0, C0 (See Table next page) Ex Cable Gland not supplied						

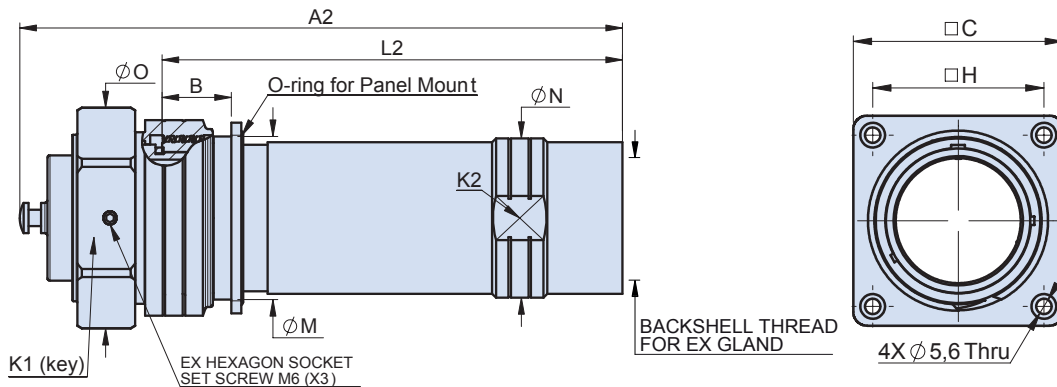

Dimensions											
Shell Size	A2	B	C	Backshell Thread for Ex Gland	H ± 0.1	K1	K2	L2	M	N	O
10SL	138	24.7	45	M20x1.5 M16x1.5	33	41	24	89	26	25	46
14S	160	24.7	45	M20x1.5 M16x1.5	33	45	26	109	30	28	49
16	190	27.6	51	M20x1.5 M16x1.5	39	49	32	134	34	34	54
18	191	27.6	57	M25x1.5 M20x1.5 M16x1.5	42	52	36	134	38	38.2	59
28	220	27.6	67	M40x1.5 M32x1.5 M25x1.5 M20x1.5 M16x1.5	52	65	48	164	52	54	72
36	241	27.6	76	M50x1.5 M40x1.5 M32x1.5 M25x1.5 M20x1.5 M16x1.5	62	78	61	184	65	63.5	88

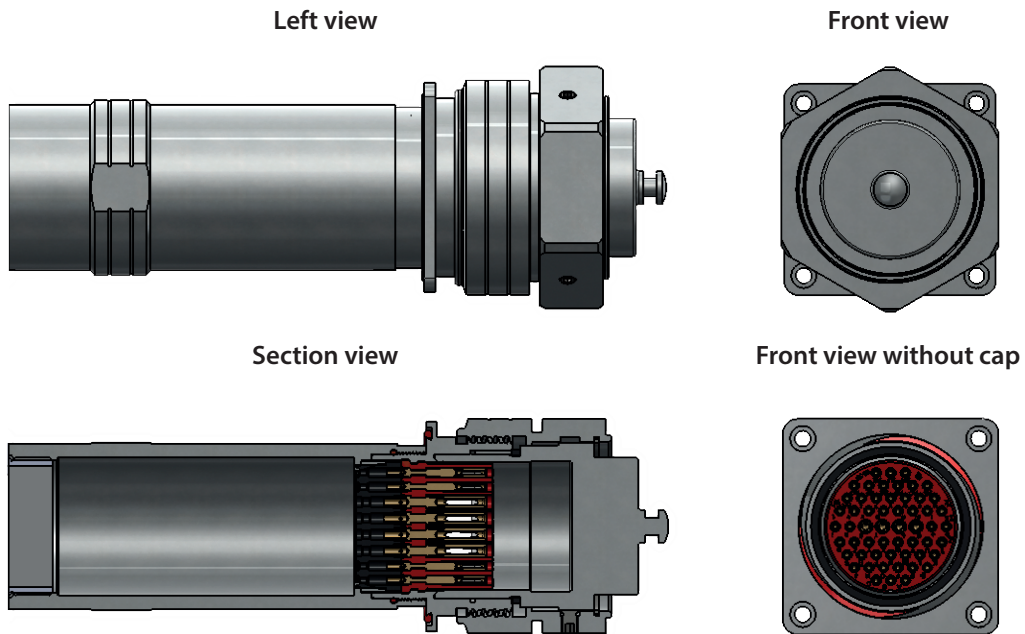

Cable Range Dimensions for Ex Cable Gland			
Shell Size	Cable Type	Cable Range Designator	Backshell Thread for Ex Gland
36	Armored/ Unarmored cable	A0	M50x1.5
		B0	M40x1.5
		C0	M32x1.5
		D0	M25x1.5
		E0	M20x1.5
		F0	M16x1.5
28	Armored/ Unarmored cable	A0	M40x1.5
		B0	M32x1.5
		C0	M25x1.5
		D0	M20x1.5
		E0	M16x1.5
18	Armored/ Unarmored cable	A0	M25x1.5
		B0	M20x1.5
		C0	M16x1.5
16 14S 10SL	Armored/ Unarmored cable	A0	M20x1.5
		B0	M16x1.5