


527-108
EMI/RFI Banding Backshell
for Size 3 ARINC 600 Series Connector

527-108 NF P A4 B4 C4 D4 E4 F4 B

Basic Part No. _____
 Finish (Table II) _____
 Connector Designator (Table III) _____

B = Band(s) Supplied 600-052, One Per Entry Location, Omit for None
 Position and Dash No. (Table I)
 Omit Unwanted Positions

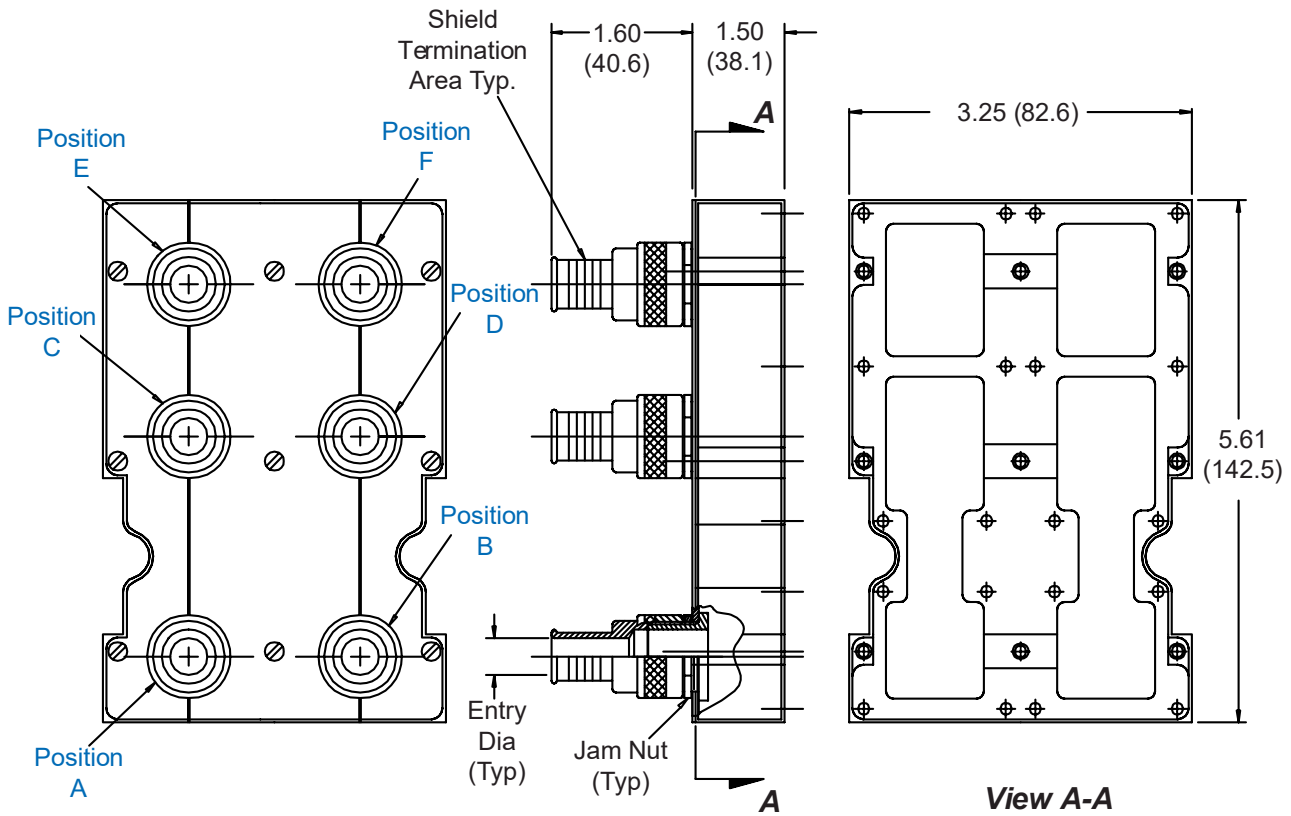

Metric dimensions (mm) are indicated in parentheses.

527-108
EMI/RFI Banding Backshell
for Size 3 ARINC 600 Series Connector



**TABLE I:
CABLE ENTRY**

Dash No.	Entry Dia	(mm)
4	.50	(12.7)
5	.63	(16.0)
6	.75	(19.1)
7	.88	(22.4)
8	1.00	(25.4)
9	1.13	(28.7)

TABLE II: FINISH OPTIONS

Symbol	Finish	Symbol	Finish
B	Cadmium Plate/Olive Drab	NC	Zinc Cobalt/Dark Olive Drab
C*	Black Anodize	NF	Cadmium Plate/Olive Drab over Electroless Nickel
G*	Anodic Hard Coat	T	Cadmium Plate/Bright over Electroless Nickel
J	Gold Iridite over Cadmium Plate over Electroless Nickel	U**	Cadmium Plate/Black
LF	Cadmium Plate/Bright over Electroless Nickel	ZN	Zinc-Nickel Alloy/Olive Drab
M	Electroless Nickel	*Anodize finish is not suitable for EMI shielding or grounding applications. **Applicable to corrosion resisting steel backshells and accessories. Consult factory for other available finishes.	
N	Cadmium Plate/Olive Drab over Electroless Nickel		

TABLE III: CONNECTOR DESIGNATOR

ARINC 600 series connector backshells are designed to replace the insert retainer plates for connector designators P, P1, P3 and P5 (P2 and P6 backshells require the use of the connector manufacturer's retainer plates). Due to non-standard modifications by the connector manufacturer, the backshell may require special design alterations to mate properly. The following should be used to determine if a backshell modification is required. Prior to ordering, consult factory with connector part numbers not shown to ensure a proper fit

Connector Designator	Connector Description
P	All Manufacturer's Plug and Receptacle Shells, Except for Those Listed Below (Prior to ordering, consult factory with connector part numbers not listed below to ensure a proper fit.)
P1	Cannon BKAD****322 Series Plug
P2	Cannon/Radiall Environmental Plug
P3	Cannon/Boeing BACC 66 Plug
P5	Radiall/Boeing BACC66 Plug
P6	Cannon BKAC & BKAE XXX322 Series Environmental Plug

1. Metric dimensions (mm) are indicated in parentheses.
2. Material/Finish:
 Backshell, Fittings, Nuts, Clamps = Al Alloy/See Table II;
 Hardware = SST/Passivate