


**962-032-130**  
**50 Ohm Low Loss Coax Cable**

- 40 GHz
- FEP Jacket
- e-PTFE Dielectric
- .135" Jacket Diameter
- Silver-Plated Copper Conductor

COAX CABLE



**CONSTRUCTION**

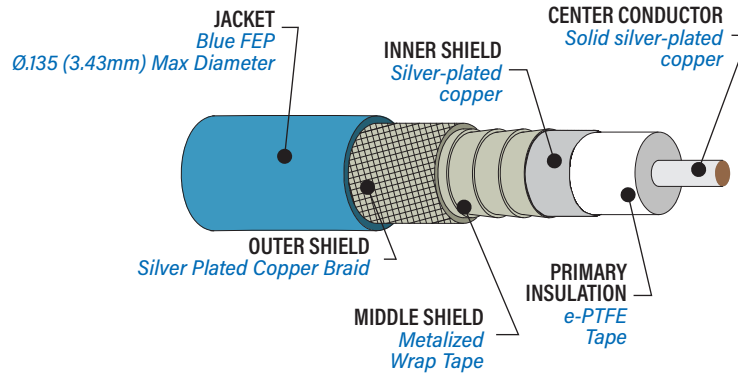

**50 ohm. Low loss. Triple shield. 40 GHz.**  
 962-032-130 coax cable has expanded PTFE dielectric for low attenuation at microwave frequencies. Abrasion resistant and flexible FEP jacket. Three metallic layers for greater than 90 dB of shielding effectiveness: SPC (silver-plated copper) tape inner shield, aluminum/polyimide foil interlayer, and round SPC braid outer shield. Solid SPC center conductor.

**SPECIFICATIONS**

- 50 ohm
- -55 to +200 °C
- Triple shield: silver plated copper braid over silver plated flat wire shields.
- Cable weight: 8.0 g/ft nom.
- Velocity of Propagation: 79%
- Capacitance (pf/ft): 25.7
- Min. Bend Radius: .625 in (15.88 MM)

**ATTENUATION**

	Typical Attenuation (dB/ft)	Typical Attenuation (dB/meter)
0.5 GHz	0.095	0.312
1.0 GHz	0.135	0.449
4.0 GHz	0.274	0.899
10.0 GHz	0.439	1.440
18.0 GHz	0.596	1.955
26.5 GHz	0.731	2.398
40.0 GHz	0.910	2.986

**CALCULATED INSERTION LOSS**

$$IL = [K_1 \sqrt{F} + K_2 F] \times \text{Cable Length}$$

*F* = Frequency in MHz    Feet or Meters per table below

	For Cable Length in Feet	For Cable Length in Meters
$K_1$	0.0042280	0.0138713
$K_2$	0.0000016	0.0000053