


HIGH-VOLTAGE kV Seal™ Contact Assemblies



GHV-002 kV Seal Plus Size #12 15 kV contacts for Glenair SuperNine and D38999 Series I, III, and IV

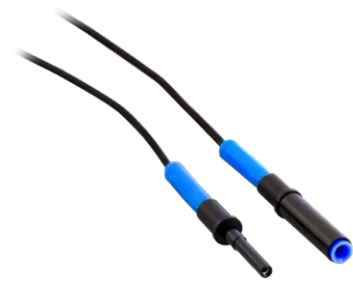

KV SEAL CONTACT FEATURES

- kV Seal Plus with molded-in socket and longer-nose pin for 15 kVDC operation
- Drop-in performance in Glenair Signature SuperNine and MIL-DTL-38999 Series I, III, and IV connectors

PERFORMANCE SPECIFICATIONS

- IR: 5000 Megohms at 500 VDC
- DWV: 22 kVDC, 10uA max leakage current at sea level / ambient conditions
- Temperature: -55° to +125°
- Add Mod Code **1223**** to part number to include high-altitude DWV testing in final inspection

MATERIAL / FINISH

- Inner Contact, Pin/Socket - copper alloy / gold over nickel
- Contact Insulator Body - high-grade rigid dielectric
- kV Seal - fluorosilicone blend
- Wire Overmold - silicone blend
- Wire - fluoropolymer primary insulation (standard). Silicone-coated fluoropolymer available.
- Assemblies using option **T** etched wire packaged in UV-resistant bags

HOW TO ORDER					
Sample Part Number	GHV-002	-A	PP	T	0 -36
Series	GHV-002 = kV Seal Plus 15 kVDC High-Voltage Contact Assembly, Size #12				
Contact Envelope / Wire Gauge	A = #24 AWG wire (See Table II)				
Contact Gender and Assembly Type	P = Pin (AS39029/58 type), with flying lead S = Socket (AS39029/56 type), with flying lead PP = Double-ended Pin assembly SS = Double-Ended Socket assembly PS = Double-ended Pin and Socket assembly				
Wire Finish	S = Silicone-Coated Fluoropolymer T = Continuously-Etched Fluoropolymer				
Wire Color Code	0 = Black (per MIL-STD-681)				
Total Length	in inches (e.g. -36 = 36 inches) 12" minimum needed for testing				


TABLE II - CONTACT ENVELOPE / WIRE GAUGE PERFORMANCE					
Sym	Contact Envelope		Wire Gauge	Current Rating	OP Voltage Through 70K ft.
	Pin	Socket			
A	AS39029/58-365	AS39029/56-353	24	3	15 kVDC




P - Pin Contact with Flying Lead: **GHV-002-*P**.***




PP - Double-Ended Pin Assembly: **GHV-002-*PP**.***



S - Socket Contact with Flying Lead: **GHV-002-*S**.***



SS - Double-Ended Socket Assembly: **GHV-002-*SS**.***



PS - Pin and Socket Assembly: **GHV-002-*PS**.***