


ENVIRONMENTAL, MICRO MINIATURE CIRCULAR Series 806 Mil-Aero Connectors




El Ochito® Heat Shrink Boots and Sealing Boots

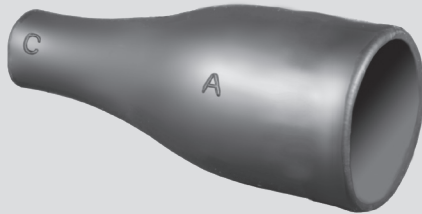

Specifications

- 770-074 non-lipped, zero halogen heat shrink boot without eyelet. Shrink boot is adhesive lined for use with Type 2 El Ochito contacts. Provides environmental sealing and strain relief support. Pre-coated with W1 zero halogen/hot melt adhesive rated for use up to 125°C. Is be used in place of a grommet follower for the type 2.


How To Order						
SAMPLE PART NUMBER		770-074	S	1	01	W1
Product	770-074 = Non-Lipped Boot Without Eyelet					
Angular Function	S = Straight					
Material	Glenair high performance elastomer					
Boot Size	See Shrink Boot Dimensions table					
Adesive	W1 = 125° C Zero Halogen/Hot Melt					

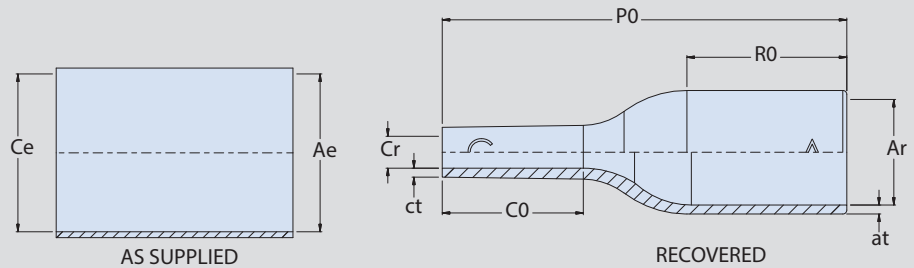

770-074 Shrink Boot Dimensions									
Boot Size	Ae Dia Min	Ce Dia Min	Ar Dia Max	at ±30%	Cr Dia Max	ct ±20%	C0 Ref	P0 ±10%	R0 Ref
-01	.354 (8.99)	.354 (8.99)	.265 (6.73)	.023 (0.58)	.080 (2.03)	.023 (0.58)	.354 (8.99)	1.015 (25.78)	.401 (10.19)

Grommet Follower

- An "F" suffix in the contact part number indicates the contact is supplied with a grommet follower. To order these contacts without grommet follower, delete the "F" suffix from the part number. Grommet followers are not available for Type II Ochito contacts.

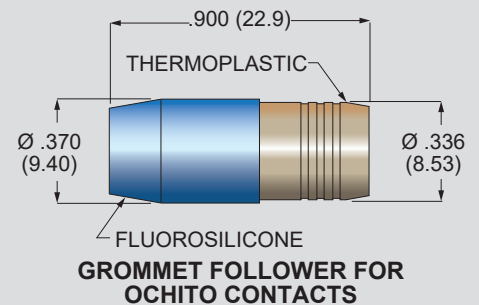

687-754-8-4
FOR .177 (4.5) DIAMETER CABLES
687-754-8-8
FOR .220 (5.56) DIAMETER CABLES
687-754-8-9
FOR .236 (6.0) DIAMETER CABLES